


GENERAL NOTE:
 1. SEE FINISH SCHEDULE FOR EXTENT OF NEW FINISHES IN AREAS WHERE WALL REMOVAL IS NOT PART OF DEMOLITION. DEMOLITION MAY BE ONLY ONE OR MORE FINISHES IN SOME AREAS.
 2. REMOVE ALL EXISTING PLUMBING IN AREAS SHOWN FOR DEMOLITION. VERIFY CONDITIONS FOR RE-USE PER PHASE II MECH/PLUMBING DRAWINGS.
 3. REMOVE ALL EXISTING ELECTRICAL EQUIPMENT IN AREAS SHOWN FOR DEMOLITION. VERIFY CONDITIONS FOR RE-USE PER PHASE II ELECTRICAL DRAWINGS.
 4. COORDINATE WITH OWNER FOR REUSE OF ITEMS IN AREAS SCHEDULED FOR DEMOLITION. ITEMS SUCH AS FILES, WALL STORAGE SYSTEM (RAIL TILE) VIEW BOXES, ETC. IF FOUND, SHOULD BE IDENTIFIED AND REVIEWED WITH OWNER.

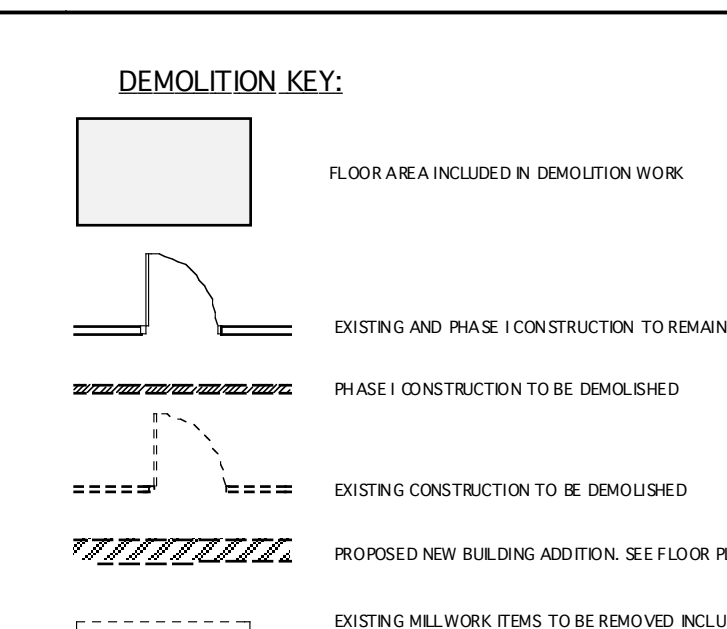

DEMOLITION NOTES:

GENERAL NOTE 1. REMOVE ALL EXISTING FLOOR MATERIAL IN ALL AREAS TO BE RENOVATED.
 2. REMOVE EXISTING WINDOW. RELOCATE TO LOCATION DESIGNATED IF REQUIRED.
 3. REMOVE DOOR AND FRAME ON EXTERIOR DOORS REMOVE EXTERIOR CONC SLABS.
 GENERAL NOTE 4. DEMOLISH ALL PARTITIONS TO THEIR FULL HEIGHT.
 5. REMOVE EXISTING COLUMN COVERS
 6. SALVAGE COUNTER, AND CABINETS, INCLUDING SINK FOR REUSE AT DESIGNATED LOCATION
 7. REMOVE ALL EXISTING POOL MECHANICAL SYSTEMS FROM MECHANICAL ROOM.
 8. DEMOLISH ALL EXISTING POOL EQUIPMENT, FINISHES, HVAC AND WATER SYSTEMS FOR LAP POOL.
 9. DEMOLISH ALL EXISTING POOL EQUIPMENT, FINISHES, HVAC AND WATER SYSTEMS FOR THERAPY POOL.
 GENERAL NOTE 10. REMOVE ALL EXISTING CEILING AND LIGHTING IN AREAS TO BE RENOVATED.
 11. REMOVE ALL EXISTING FIXTURES. BUILT-IN SHOWERS FLOOR, WALL AND CEILING FINISHES IN EXISTING SHOWER ROOMS. REMOVE LOCKERS AND COORDINATE WITH OWNER FOR REUSE OR DISPOSAL.
 12. REMOVE EXISTING LAST SECTION OF WALL CABINETS FOR INSTALLATION OF NEW PARTITION.
 13. REMOVE EXISTING WALL SURFACE FOR INSTALLATION OF LEAD LINED GWB AS PART OF X-RAY INSTALLATION
 14. REMOVE EXISTING BRICK AND EXTERIOR SHEATHING ON EXISTING EXTERIOR WALL. PROVIDE 5/8" GWB FOR NEW INTERIOR WALL FINISH.
 15. CONC. POOL DECK IS WARPED FOR DRAINAGE AWAY FROM POOL. DECK SURFACE MUST BE LEVELLED TO SAME ELEVATION AS FLOOR IN OTHER AREAS OF THE ADJACENT SPACE. REMOVE ALL CT, GROUT AND CONCRETE SUFFICIENT TO PROVIDE LEVEL FLOOR FINISH TO MATCH OTHER AREAS.
 16. REMOVE EXISTING COUNTERS, CABINETS AND ACCESSORIES WHICH REMAIN AT START OF DEMOLITION.

Design Firm
HKTA Architects, Inc.
 4 Knox Street
 Portland, Maine 04102
 Phone: 207-774-6096
 Fax: 207-774-6097
 www.hkta.com

Consultant
BRIAN O'DONNELL
 No. 1483
 REGISTERED ARCHITECT
 STATE OF MAINE

Project Title
ORTHOPAEDIC ASSOCIATES, PA
BUILDING EXPANSION
33 SEWALL STREET
PORTLAND, MAINE

| Issue/Revision | Date | Description |
|-----------------------------------|------|-------------|
| Project ID: 20040180A | | |
| CAD File Name: 2004018 CA Phase I | | |
| Drawn By: | | |
| Checked By: BOD | | |
| Issue Date: 2/25/05 | | |
| Plot Date: 2/25/05 | | |
| Reviewed by: BOD | | |
| Designed by: | | |
| Submitted by: | | |
| Drawing Code: Demolition Plan-1 | | |
| Sheet Title: Demolition Plan-1 | | |

Drawing No.
D-101
 of