




ENLARGED FRAMING PLAN - ZONE 6
SCALE: 1/2" = 1'-0"

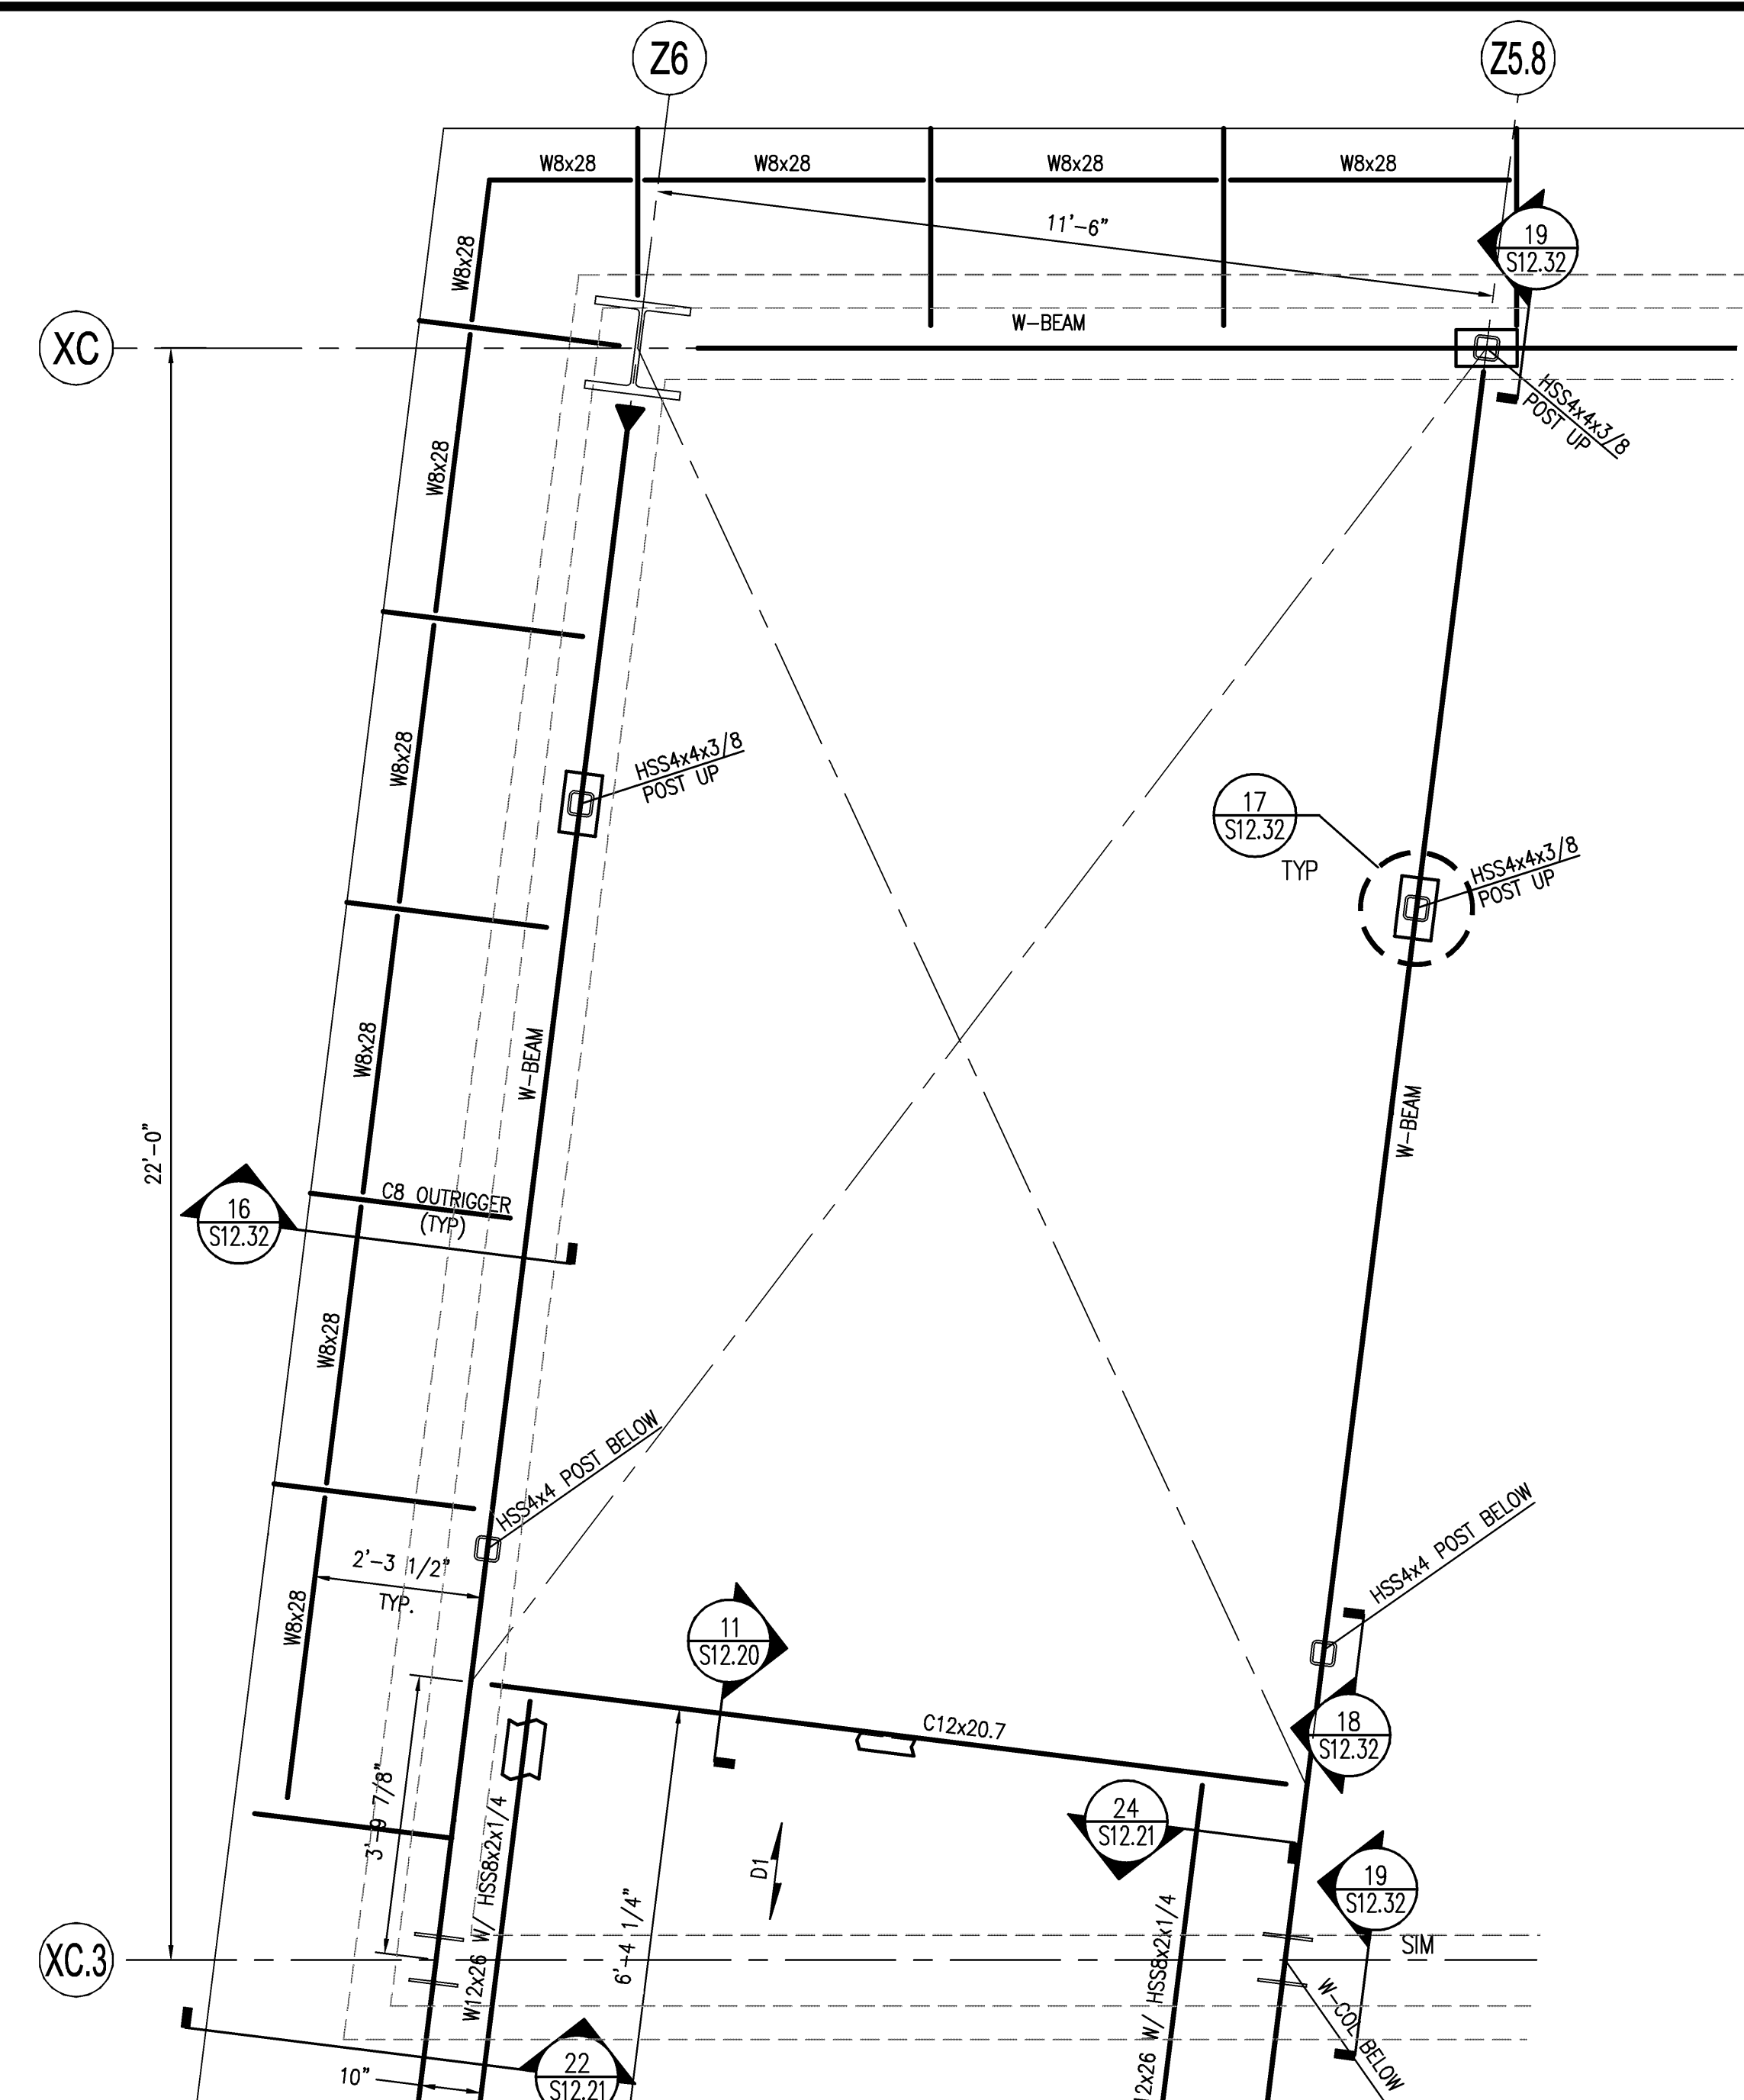


ENLARGED FRAMING PLAN - LEVEL 4 - ZONE 6
SCALE: 1/2" = 1'-0"

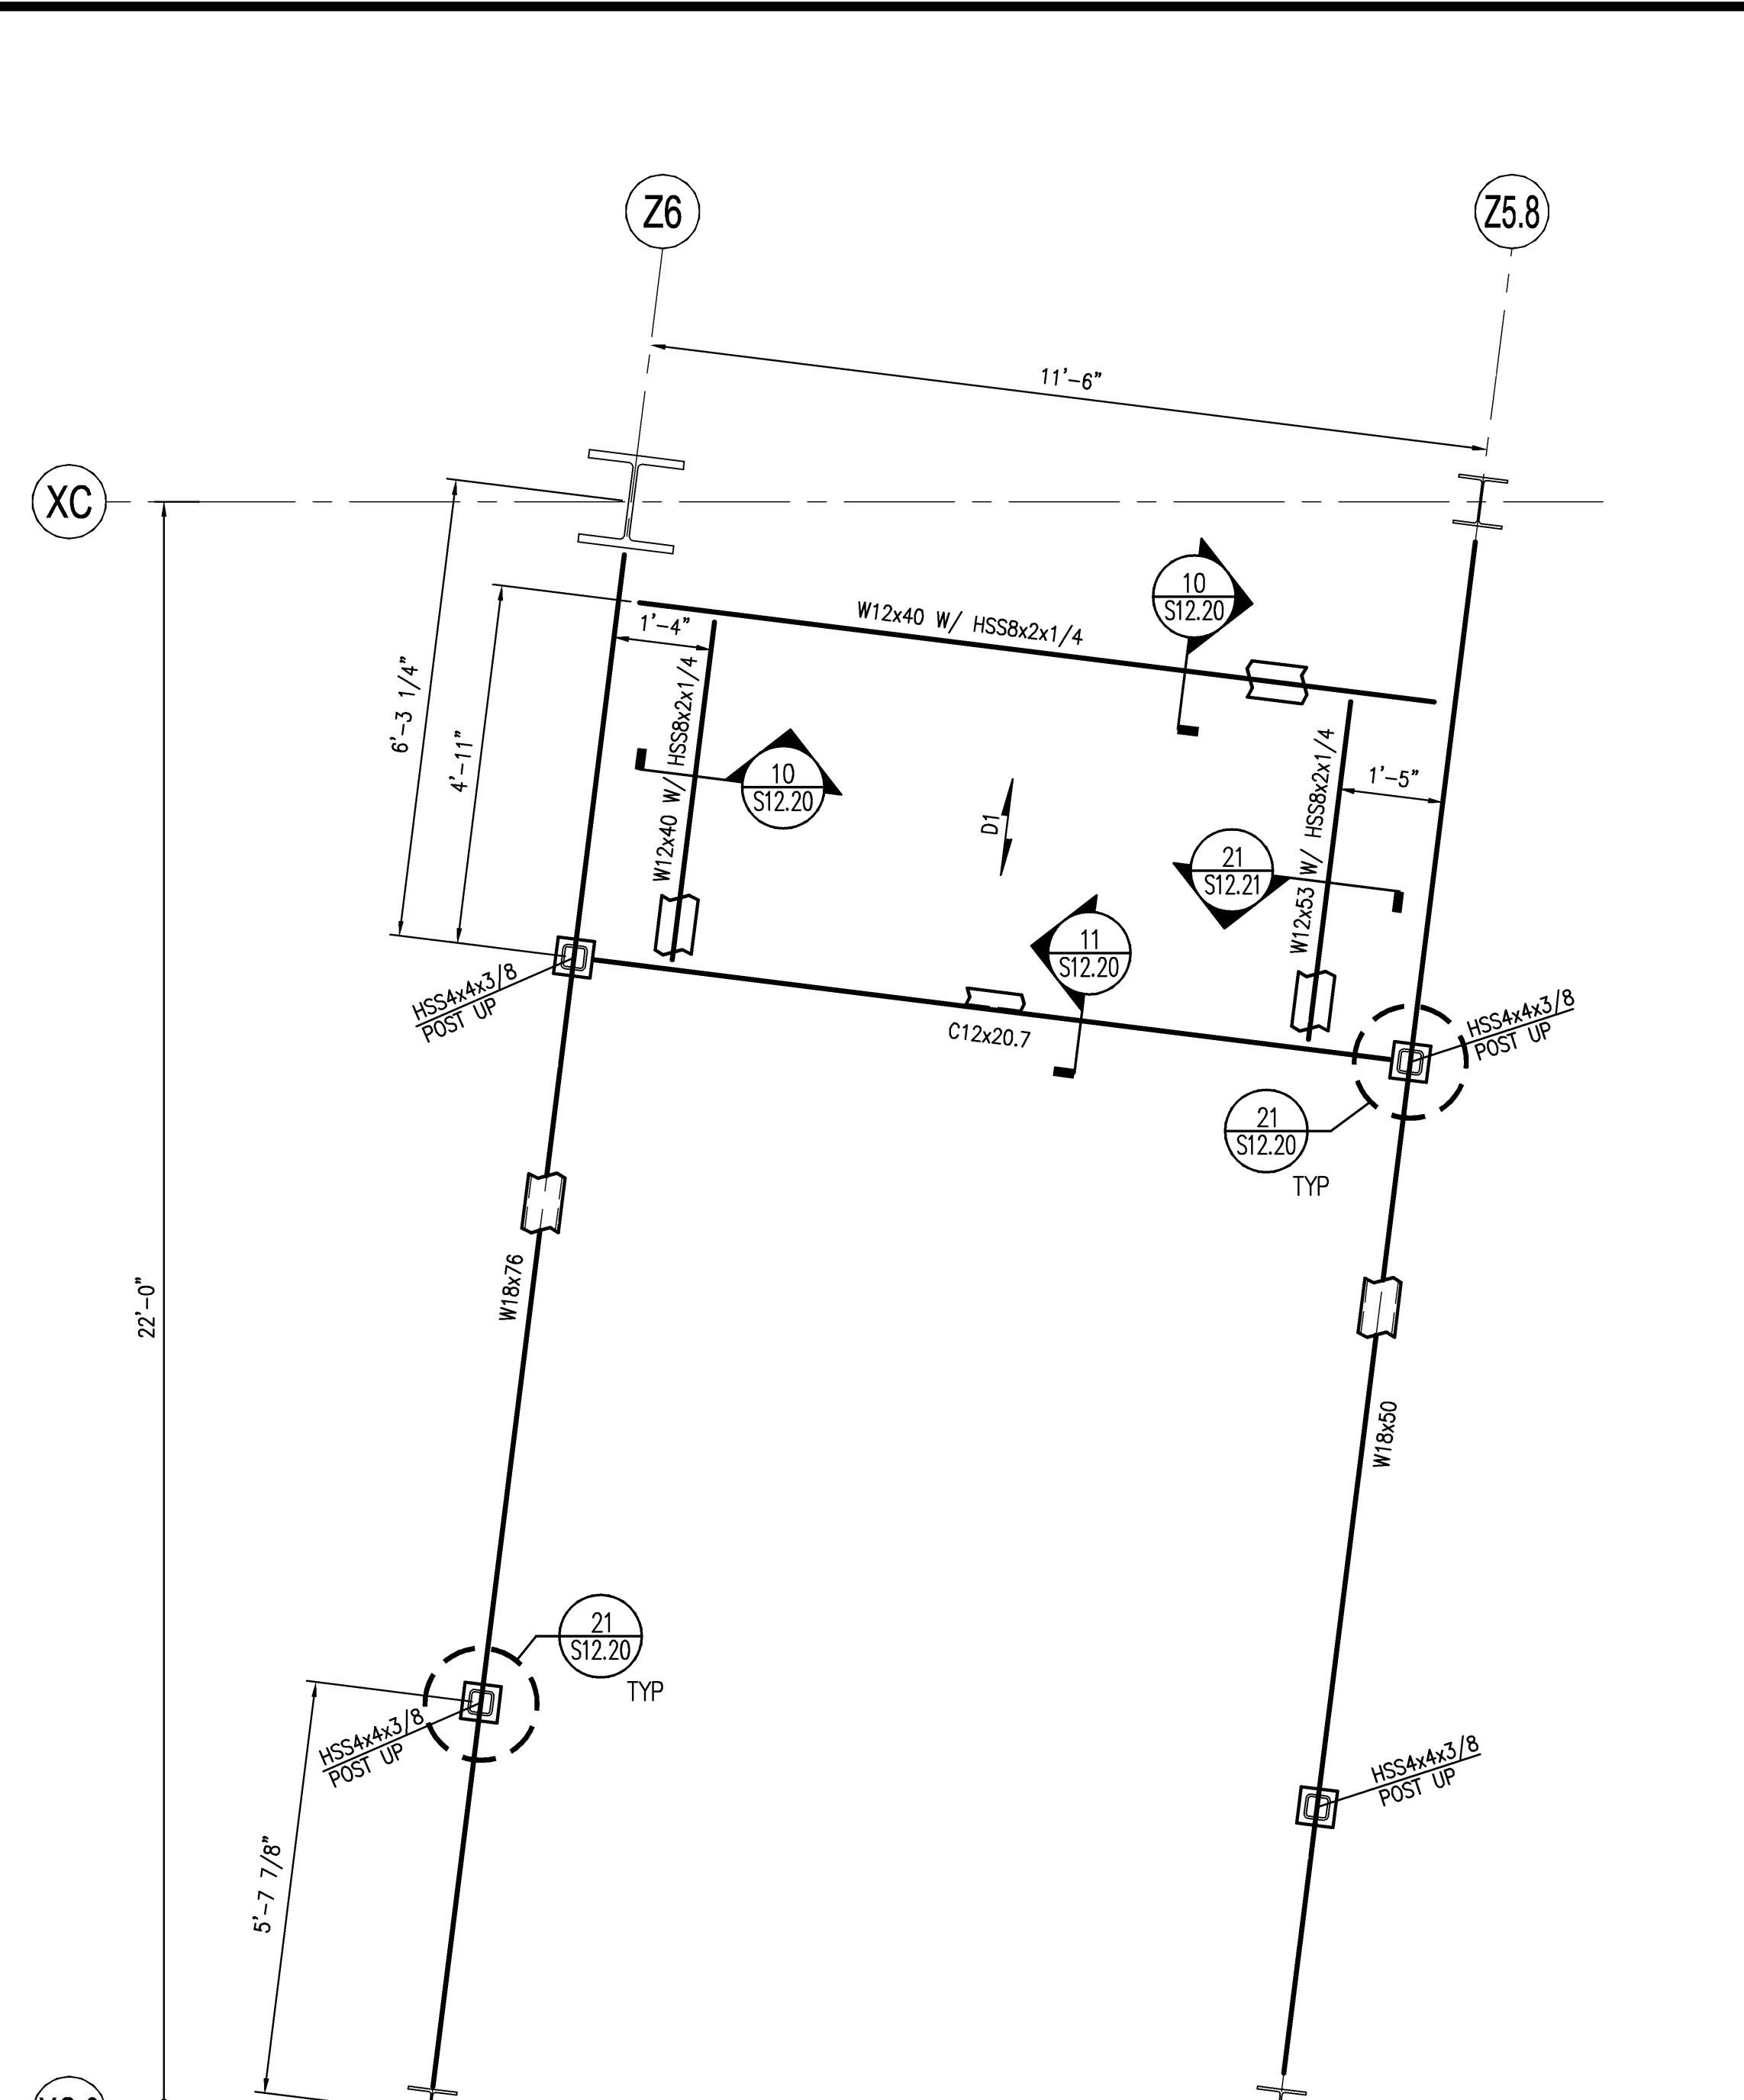


ENLARGED FRAMING PLAN - ZONE 6
SCALE: 1/2" = 1'-0"

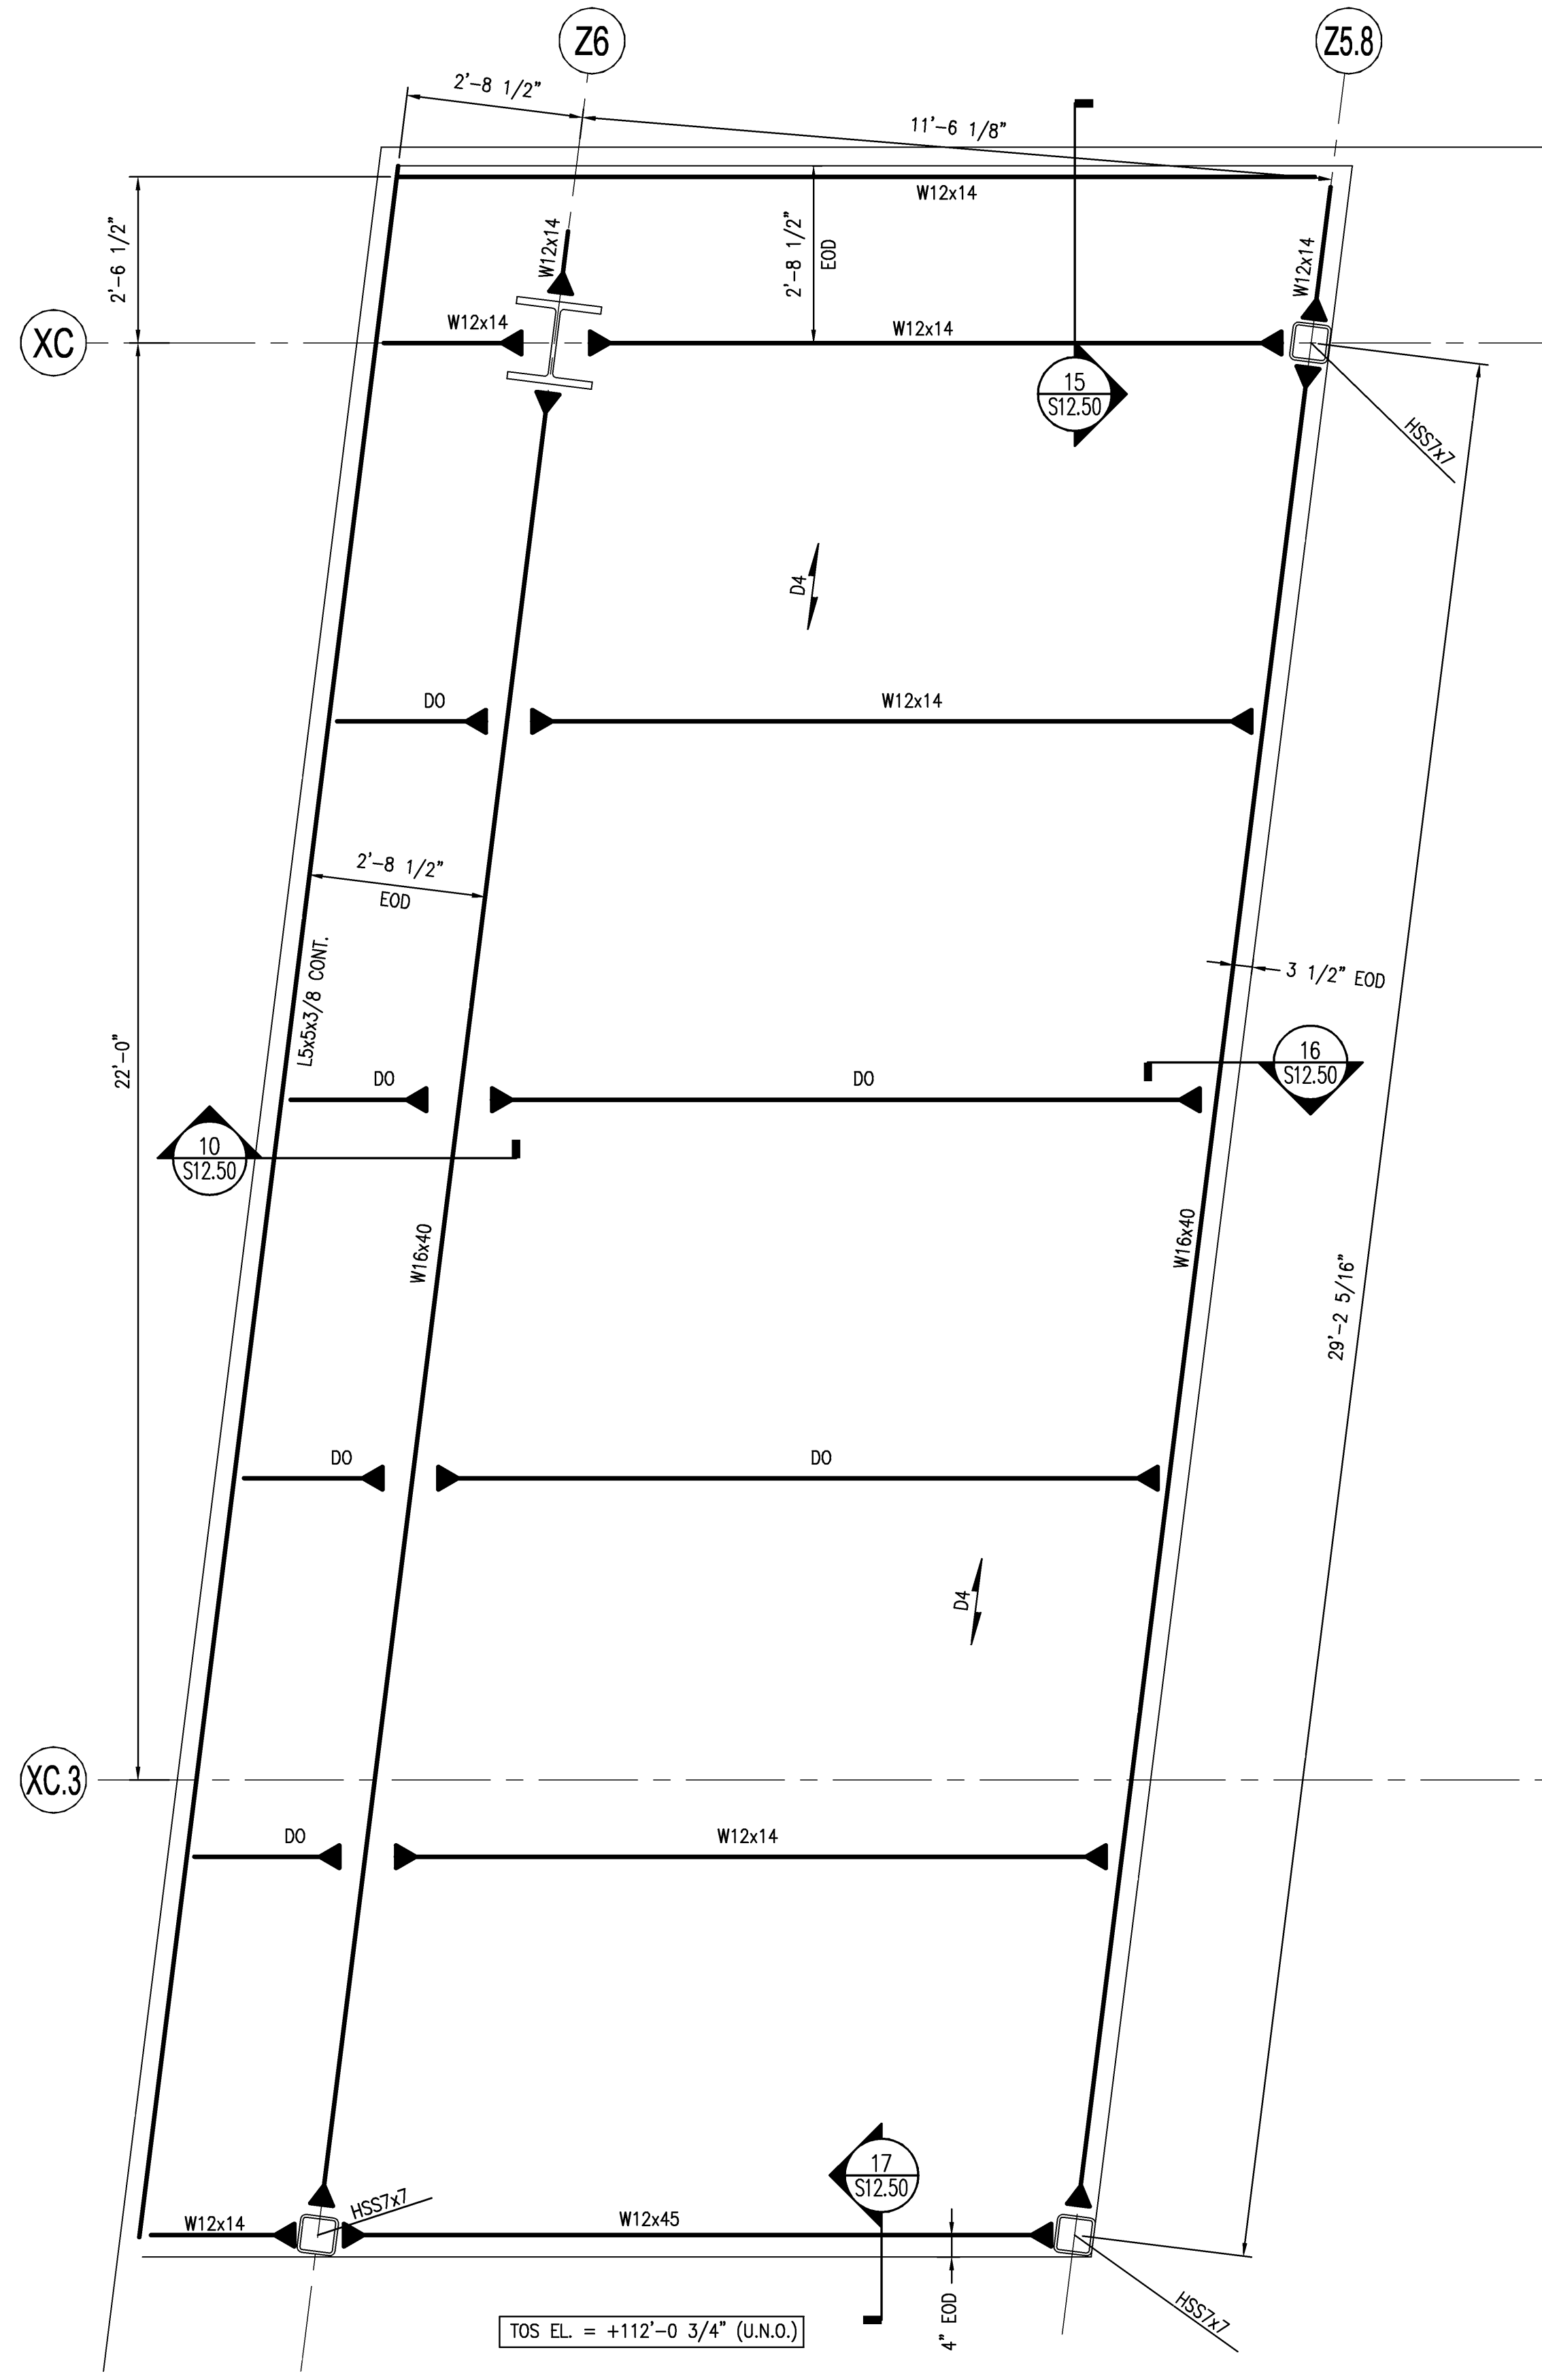

ENLARGED FRAMING PLAN - ROOF - ZONE 6
SCALE: 1/2" = 1'-0"

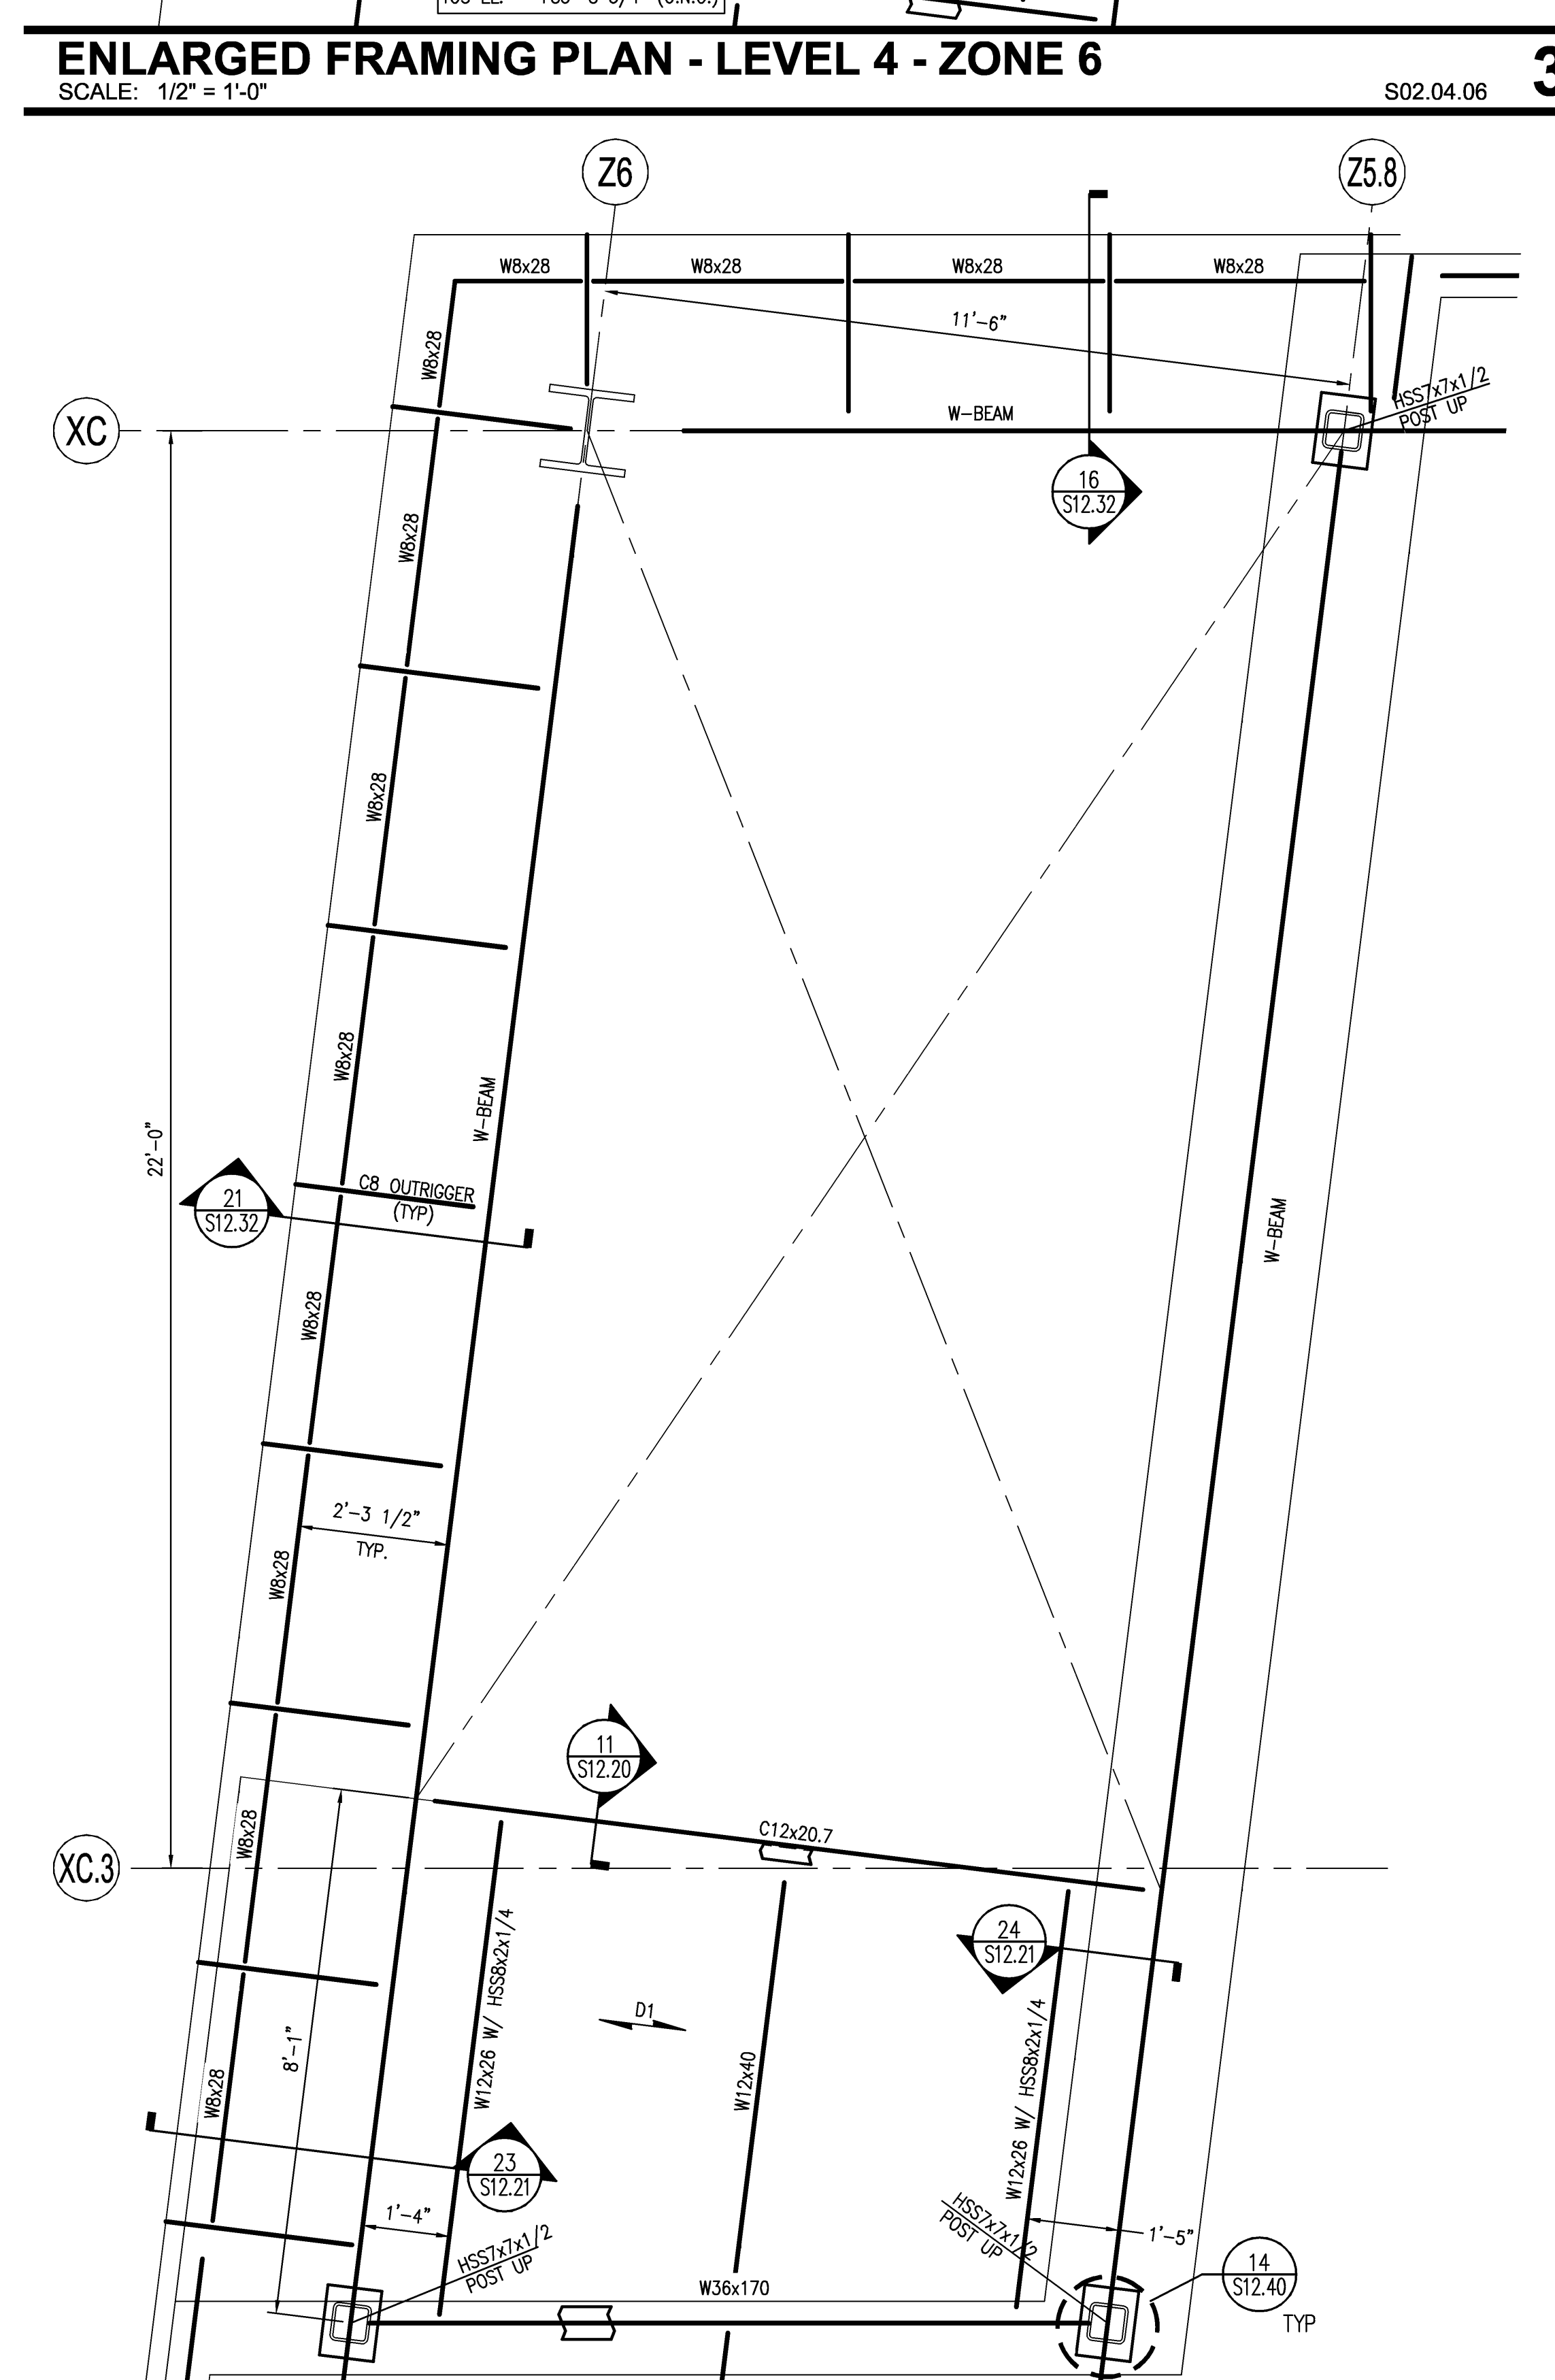

ENLARGED FRAMING PLAN - LEVEL 5 - ZONE 6
SCALE: 1/2" = 1'-0"

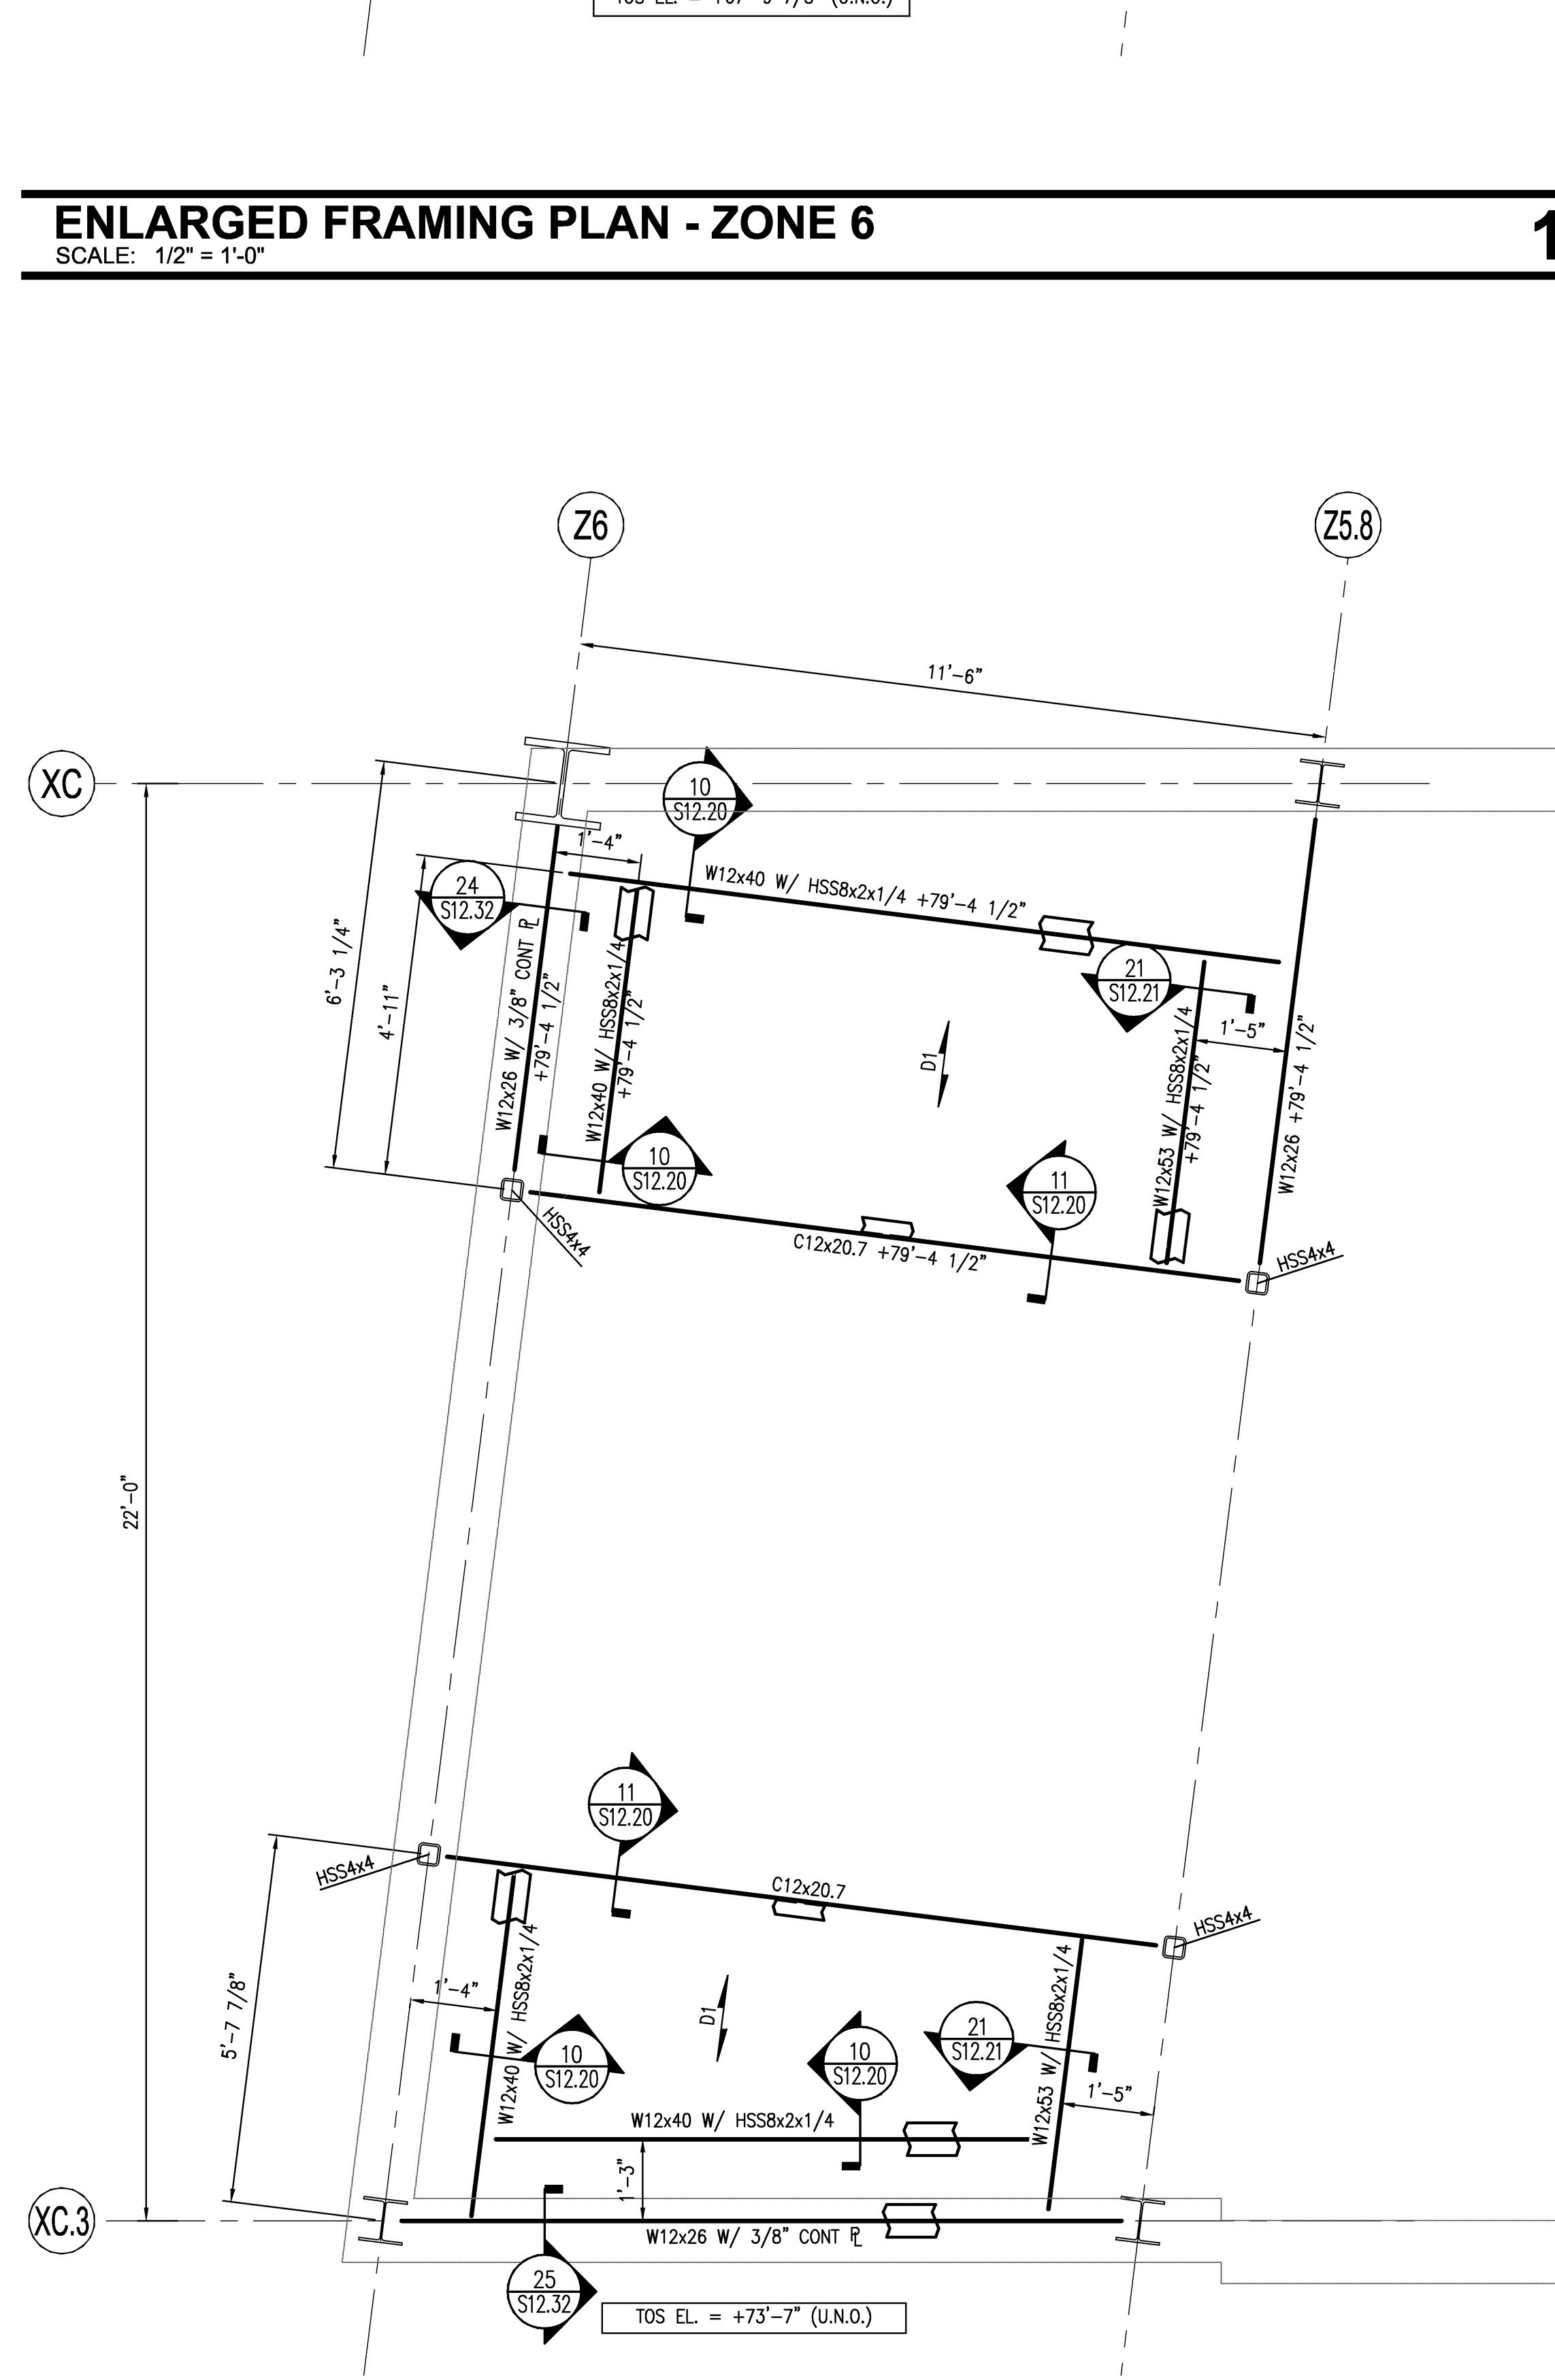

ENLARGED FRAMING PLAN - LEVEL 3 - ZONE 6
SCALE: 1/2" = 1'-0"

SHEET NOTES

EDD INDICATES EDGE OF DECK

D1 DECK TO BE 6" LIGHT WEIGHT CONCRETE SLAB ON 18 GAGE 2" THICK COMPOSITE METAL DECK REINFORCED WITH 6#6-W2.1W2.1 W/ _____ DIAMETER WELD PATTERN AND _____ SCREWS SIDE LAP CONNECTION PER SPAN. SEE GENERAL NOTES.

D4 DECK TO BE 5" LIGHT WEIGHT CONCRETE SLAB ON 18 GAGE 2" THICK COMPOSITE METAL DECK REINFORCED WITH 6#6-W2.1W2.1 W/ _____ DIAMETER WELD PATTERN AND _____ SCREWS SIDE LAP CONNECTION PER SPAN. SEE GENERAL NOTES.

INDICATES LOCATION OF MOMENT CONNECTION CAPABLE OF DEVELOPING THE FULL MOMENT CAPACITY OF THE FLEXURAL ELEMENT.

12K (EXAMPLE) INDICATES MEMBER END REACTION IN KIPS.

GENERAL NOTES

- GENERAL CONTRACTOR TO CONFIRM ALL DIMENSIONS AND ELEVATIONS WITH ARCHITECTURAL DRAWINGS PRIOR TO START OF WORK.
- FINISHED FLOOR ELEVATION = SEE ARCH. TOP OF STEEL ELEVATION = SEE PLANS UNLESS NOTED OTHERWISE (TOS).
- FRAMING NOT SPECIFICALLY DIMENSIONED SHALL BE ASSUMED EQUALLY SPACED.
- SEE SHEET S00.00 FOR GENERAL STRUCTURAL NOTES AND DESIGN LOADS.
- ALL FLOOR FRAMING MEMBERS SHALL BE PROPERLY BRACED BY THE CONTRACTOR UNTIL THE STRUCTURAL FLOOR DIAPHRAGM HAS BEEN COMPLETELY CONSTRUCTED.
- CONTRACTOR SHALL COORDINATE ALL FLOOR OPENINGS WITH MECHANICAL DRAWINGS. ALL FLOOR OPENINGS LARGER THAN 10" DIAMETER OR SQUARE SHALL BE SUPPORTED ON FRAME (SEE SHEET S12.04). ANY OPENING NOT SHOWN ON THIS DRAWING SHALL NOT BE CONSTRUCTED WITHOUT THE ARCHITECT'S APPROVAL.
- METAL STUD GAGES SHALL BE SELECTED BASED ON THE STUD DEPTHS SHOWN ON THE ARCHITECTURAL PLANS. WIND LOAD = 35 PSF AND MAXIMUM DEFLECTION OF 1/360 OR 0.3" @ BRICK VENEER, H/360 FOR PANEL WALL. - VERTICAL DEFLECTION CLIPS FOR ALL STUDS ATTACHING TO BEAMS.

KEY PLAN

1/8" = 1'-0"

Ref. North

Portland International Jetport
1001 Westbrook Street
Portland, Maine 04102

Gensler
2020 K Street, NW
Suite 200
Washington, DC 20006
Telephone 202.721.5200
Facsimile 202.872.8587

oest ASSOCIATES, INC.
343 Gorham Road, South Portland, ME 04106
P: (207) 781-1770 F: (207) 774-1246 www.oest.com
engineers - architects - surveyors - construction managers

amec
343 Gorham Road, South Portland ME 04106
P: (207) 761-1770 F: (207) 774-1246 www.amec.com

THESE DRAWINGS ARE ISSUED FOR CONSTRUCTION AND REFLECT ALL AMEC ISSUED BULLETINS AND SKETCHES.

Issue	Date & Issue Description	By	Check
--	01 01/23/09	JDE	--
--	02 10/26/09	JDE	--
Δ	03 05/03/10	JDE	--
Δ	04 06/07/10	JDE	--
Δ	05 09/01/11	JDE	--
145	05 09/01/11	JDE	--

ISSUED FOR CONSTRUCTION

Project Name: PWM Terminal Enhancement

Project Number: 08.6395.000

CAD File Name: T:\5330101\5330101\SHEETS\S08.01.DWG

Description: ENLARGED FRAMING PLANS - ZONE 6

Scale: 1/8" = 1'-0"

S08.01

©2009 Gensler