


(H1) FLOOR PLAN: PHASE I

SHEET NOTES:

- 1. SEE SHEET G-1 FOR LEGEND, ABBREVIATIONS & GENERAL NOTES.
- 2. RESERVED




REMOVAL KEY NOTES:

- 1 REMOVE DOOR, FRAME AND HARDWARE COMPLETE.
- 2 REMOVE CEILING TILE AND GRID ASSEMBLY COMPLETE.
- 3 REMOVE PARTITION WALLS & SOFFITS, ROUGH- IN NEW OPENINGS IN EXISTING WALLS.
- 4 REMOVE APPLIED WALL FINISHES (ACROVYN PANELING). REMOVE FOR FULL- PANEL REPLACEMENT.
- 5 REMOVE EXISTING FINISH FLOORING TO SUBSTRATE.
- 6 REMOVE WALL ACCESSORIES & WALL- MOUNTED ITEMS.
- 7 REMOVE BASEBOARD.
- 8 REMOVE OAK CHAIR RAIL. REMOVALS SHALL BE IN NO LESS THAN 10'-0" LENGTHS.
- 9 REMOVE COUNTERS & CASEWORK COMPLETE.
- 10 REMOVE EXISTING CABINETS & COUNTERTOPS COMPLETE.
- 11 RESERVED

GENERAL REMOVALS NOTES:

- COORDINATE REMOVALS WITH EXISTING FINISHES TO REMAIN, AND WITH LOCATIONS OF NEW WORK.
- 2. PROTECT ALL EXISTING FINISHES, MATERIALS AND EQUIPMENT TO REMAIN. CONTRACTOR SHALL BE RESPONSIBLE FOR REPLACEMENT OF ALL FINISHES, MATERIALS AND EQUIPMENT DAMAGED DURING CONSTRUCTION.
- 3. THE OWNER RESERVES THE RIGHT TO SAVE FOR FUTURE USE ALL SALVAGABLE ITEMS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVING ALL ITEMS NOT SAVED BY THE OWNER.
- 4. "REMOVE" MEANS TO REMOVE AND DISPOSE OF ITEMS.
- 5. REMOVE EXISTING FLOORING THROUGHOUT PREPARE SUBSTRATE FOR NEW FLOOR FINISHES.
- 6. CONTRACTOR SHALL BE RESPONSIBLE, AND SHALL PAY FOR, PROPER DISPOSAL OF ALL DEMOLITION & CONSTRUCTION
- 7. RESERVED
- 8. REFERENCE ELECTRIC DRAWINGS FOR ELECTRICAL DEMOLITION & REMOVALS.
- 9. REFERENCE MECHANICAL DRAWINGS FOR MECHANICAL DEMOLITION & REMOVALS.
- 10. ALL EXISTING ELECTRICAL WORK SHALL BE REMOVED. THOSE REMOVALS SHALL GO BACK TO THE PANEL OR SOURCE OF ORIGINATION.
- 11. REMOVE ALL ITEMS CURRENTLY ABANDON IN PLACE.
- 12. DATA & TELEPHONE LINES WILL BE DISCONNECTED AT THE SWITCH BEFORE THE CONTRACTOR ARRIVES ON SITE, CONTRACTOR SHALL REMOVE DATA & TELEPHONE LINES FROM EXISTING WALLS, BUT SHALL NOT BE RESPONSIBLE FOR REMOVING THOSE LINES BACK TO THE SWITCH.
- 13. WHEN CORE DRILLING IS REQUIRED, CONTRACTOR SHALL COLLECT WATER FROM CUTTING OPERATIONS & PROTECT EXISTING CONDITIONS TO REMAIN.
- 13. ALL CUTTING & PATCHING OF ROOF MEMBRANE SHALL BE PERFORMED SUCH THAT THE THE ROOF WARRANTY SHALL BE MAINTAINED.
- 14. INSTALL TEMPORARY DUST PARTITIONS AROUND WORK AREAS THAT ABUT AREAS IN USE BY THE OWNER, WHERE DUST MAY OCCUR. SUCH AREAS INCLUDE ROUGHING IN NEW DOORS & WINDOWS.

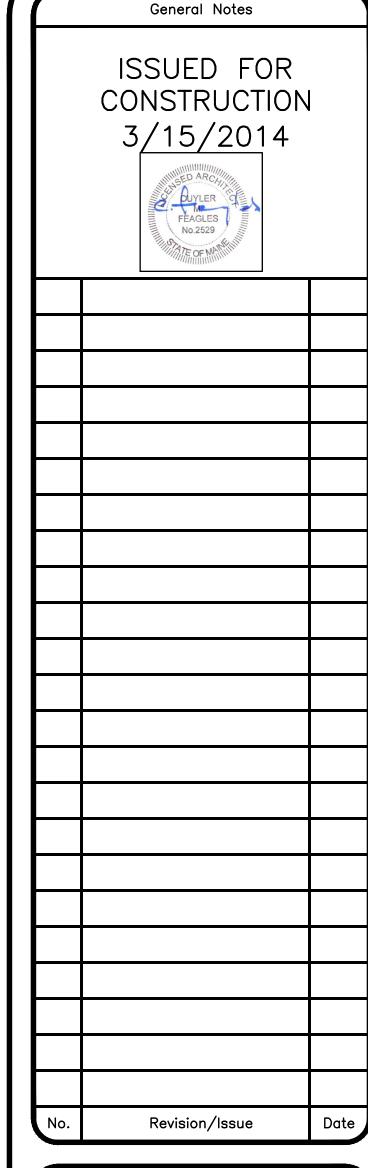



Project Name and Address
COMMUNICATIONS
CENTER
RENOVATIONS
AT THE PORTLAND
INTERNATIONAL
JETPORT

DEMOLITION PLAN

,-	
Project Number: 1402	Sheet:
1402	
Date: Issued For Construction 3/15/2014	
Scale:	
Peteropee Individual Prawings	I