


TJM CONSULTING, INC.  
273 MAIN STREET, SUITE 5  
YARMOUTH, MAINE 04096  
PHONE: (207) 215-4736  
E-MAIL: TOM@TJMCONSULTING.NETnet

THOMPSON POINT - BRICK SOUTH  
CATERING KITCHEN



**BALLY FLOOR PANEL GUIDELINES**

INSTALLATION INSTRUCTIONS FOR BALLY FLOOR PANELS


1. PREPARE SURFACE: (CONCRETE OR GYP-SOLAR) PREPARED SURFACE MUST BE LEVEL AND DRY. REMOVE ALL OIL, GREASE, AND DEBRIS. PATCH ALL HOLES AND CRACKS WITH PORTLAND CEMENT MORTAR.

2. AIR GAP/CIRCULATION RECOMMENDATION: (SEE NOTE) AIR GAP/CIRCULATION RECOMMENDATION: (SEE NOTE) AIR GAP/CIRCULATION RECOMMENDATION: (SEE NOTE)

3. ELECTRICAL CONNECTION: (SEE NOTE) ELECTRICAL CONNECTION: (SEE NOTE) ELECTRICAL CONNECTION: (SEE NOTE)

4. DO NOT USE THIS DRAWING FOR INSTALLATION!

5. EVERY SHIPPED ORDER WILL HAVE A FINALIZED "AS-BUILT" DRAWING.

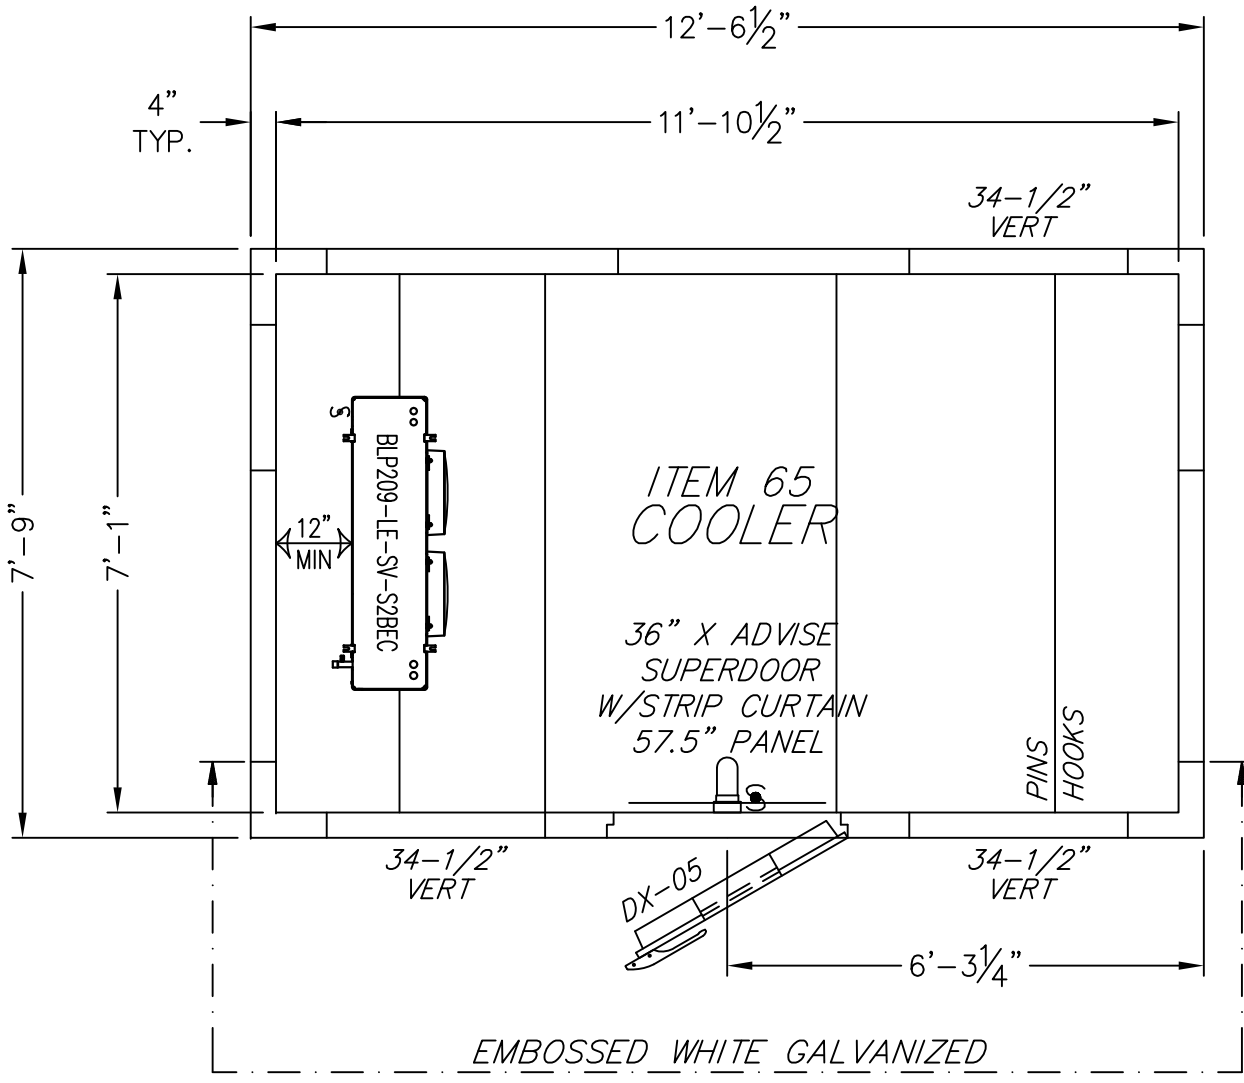

— PLAN VIEW B —

**SPECIFICATIONS**  
12'-6 1/2" X 7'-9" X 8'-6"

**INSTALLATION**

- INDOOR
- LOADING HEIGHT - AT LEAST 18" OF OPEN SPACE MUST BE MAINTAINED BETWEEN TOP OF PRODUCT AND CEILING PANELS

**INSULATION**

- FOAMED IN-PLACE POURED URETHANE

**EXTERIOR FINISH**

- EMBOSSED WHITE GALVANIZED AS SHOWN
- EMBOSSED WHITE GALVANIZED CEILING
- EMBOSSED GALVALUME REMAINDER

**INTERIOR FINISH**

- EMBOSSED WHITE GALVANIZED

**FLOOR FINISH**

- (INTERIOR) 16GA. GALVANIZED STEEL
- (EXTERIOR) EMBOSSED GALVALUME

**DOORS/ACCESSORIES**

- (1) 36" X ADVISE RIGHT SWING HINGED WALK-IN DOOR
- SUPERDOOR: 3RD HINGE, DT INT & EXT 36" H
- STRIP CURTAIN
- VAPOR-PROOF LIGHT W/ LED BULB
- MODULARM 75LC W/ MAG CONTACTS, PANIC BUTTON, MOTION DETECTOR
- 14" X 24" HEATED OBSERVATION WINDOW
- EXTERIOR CROSSOVER CORD


**REFRIGERATION** - BY BALLY (CONDENSING UNIT MOUNTED OUTDOORS)

1 0.8 FROM BEH008-EE-HS28B 208-230/1/60 5.4 40.0 1 0.5 7.3 15 C

NOTE

- (1) HEATED & INSULATED RECEIVER FOR CONDENSING UNIT
- (1) WINDGUARD FOR CONDENSING UNIT

**FLOOR DETAIL**

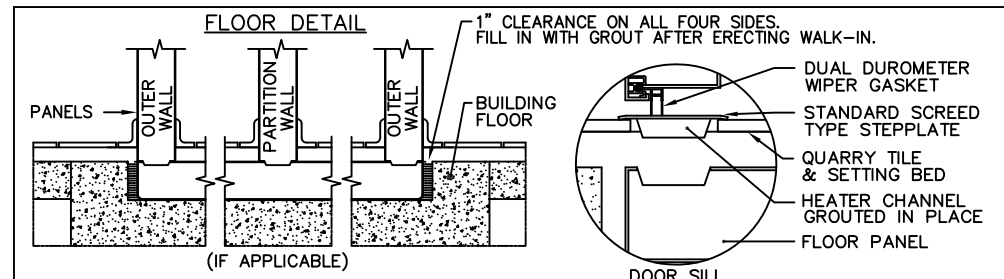

NOTE: BEARING SURFACE UNDER FLOOR PANELS MUST BE LEVEL AND DRY. BOTTOM OF PANELS MUST HAVE AT LEAST 3/8" CONTACT WITH FLOORS.

NOTE: IF MOISTURE IS PRESENT UNDER BUILDING FLOOR, A VAPOR BARRIER MUST BE APPLIED BETWEEN BUILDING FLOOR AND PREFAB PANELS.

NOTE: BALLY TO FURNISH THE PREFAB SECTIONAL WALK-IN COOLER OR FREEZER ONLY (UNLESS OTHERWISE SPECIFIED). THIS INCLUDES WALLS AND CEILING PANELS.


NOTE: THESE DRAWINGS ARE INTENDED TO SERVE AS GUIDE LINE DRAWINGS ONLY. THEY ARE NOT INTENDED TO BE CONSTRUCTION DRAWINGS AS CONDITIONS MAY VARY WIDELY. DIMENSIONAL AND MATERIAL DESIGN TO BE DETERMINED BY PROJECT CONSTRUCTION ENGINEER.

**GENERAL NOTES**

- NOTE: BALLY TO FURNISH (4) K1810 48" LED LIGHTS. LIGHTS SHIPPED LOOSE AND MOUNTED AND WIRED BY OTHERS. (LIGHT SWITCH (12) AMPS MAX).
- NOTE: BALLY TO FURNISH EY CLOSURE TRIM PLEASE ADVISE SIZE AND QUANTITY. ALL FASTENERS AND INSTALLATION BY OTHERS.

— TILE THICKNESS —  
TO STOP TILE CRACKS OVER BALLY FLOORS, BALLY RECOMMENDS MINIMUM 2" TILE AND SETTING BED.

**SECTION VIEW THRU ENTRANCE DOOR**

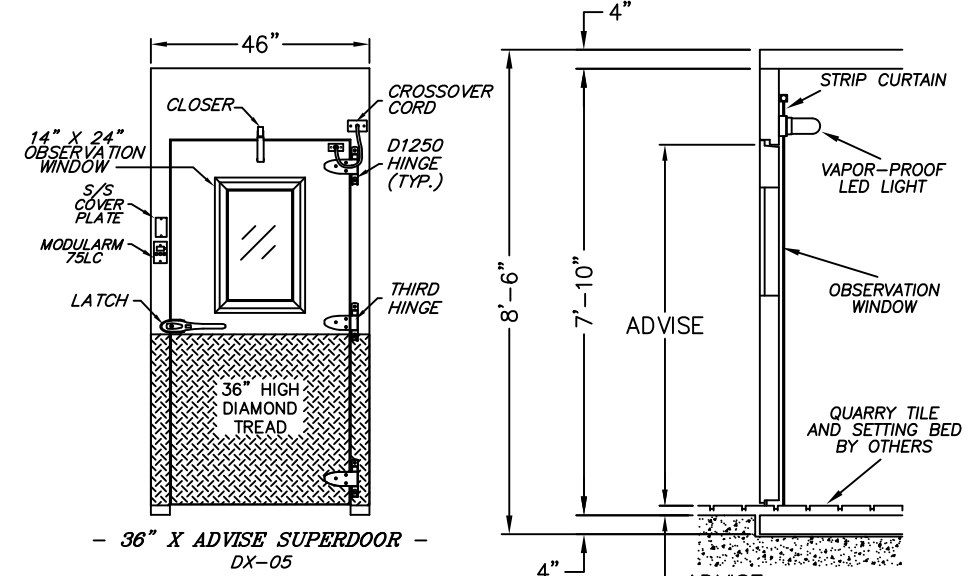

— SECTION VIEW THRU ENTRANCE DOOR —

SHEET 2 OF 2

RESTRICTED, CONFIDENTIAL DOCUMENT.

THIS DRAWING AND ALL INFORMATION SHOWN HEREON ARE THE EXCLUSIVE PROPERTY OF BALLY REFRIGERATED BOXES, INC. ARE SUBMITTED ONLY ON A CONFIDENTIAL BASIS. THE RECIPIENT AGREES NOT TO REPRODUCE THE DRAWING, TO RETURN IT UPON REQUEST, OR THE INFORMATION SHOWN HEREON WILL BE MADE TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT FROM BALLY REFRIGERATED BOXES, INC.

SIGNED APPROVAL

SIGNED \_\_\_\_\_

DATE \_\_\_\_\_

PLEASE READ

THIS DRAWING HAS BEEN CAREFULLY CHECKED BY OUR DRAFTING DEPARTMENT. HOWEVER, SERVICES OR INTERPRETATION CAN OCCUR. THEREFORE, BEFORE YOU RETURN DRAWINGS MARKED "APPROVED", BE CERTAIN THAT YOU CHECK THEM CAREFULLY.

NOTE - THIS ORDER WILL NOT BE SCHEDULED FOR PRODUCTION UNTIL RECEIPT OF APPROVED DRAWINGS BY BALLY.

IMPORTANT - PLEASE READ

THESE DRAWINGS ARE NOT TO BE CONSIDERED AS APPROVED BY LOCAL OR STATE BUILDING AUTHORITIES. THEY HAVE BEEN PREPARED SOLELY FOR THE USE OF ARCHITECTS AND ENGINEERS AND FOR THE ASSISTANCE OF LOCAL CODE REQUIREMENTS. THE PROPER STRUCTURAL DESIGN AS WELL AS ANY WORK PERFORMED BY THE GENERAL CONTRACTOR FOR THE STRUCTURAL COMPLETION OR USAGE OF THIS STRUCTURE DESCRIBED.

THE DRAWINGS AND SPECIFICATIONS DESCRIBE A BUILDING ASSEMBLED FROM BALLY PANELS INSULATED WITH URETHANE FOAM. THE SIZE AND SHAPE IS THAT WHICH MOST CLEARLY REPRESENTS THE BUILDING SUBMITTED BY THE USER. BALLY REFRIGERATED BOXES, INC. PROVIDES PANELS FREQUENTLY SPECIFIED BY OTHERS, AND IS NOT RESPONSIBLE FOR THE SELECTION OR RECOMMENDATION BY OTHERS OF THE PANEL FINISH FOR ANY BUILDING OR WALK-IN APPLICATION.

**Bally** BALLY INC OFFICE: 103 LITTLE ROCK AVE. WARRINGTON, VA 22097 PHONE: (541) 240-2234

BALLY (PA) OFFICE: 25 HANCOCK ST. SUITE 40 BALLY PA 19001 PHONE: (610) 702-2212

FOR THOMPSON POINT

DRAWING NUMBER: 5071916BC	DATE: 07/25/16			
DRAWN BY: RCB	ORDER NUMBER: 5071916			
REV	DATE	DESCRIPTION	BY	DATE

THIS DRAWING AND ALL INFORMATION HEREIN ARE THE PROPERTY OF THE DESIGNER AND MAY NOT BE USED OR COPIED, EITHER IN WHOLE OR IN PART, WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE DESIGNER

REV NO: REVISIONS:

PROJECT: BRICK SOUTH KITCHEN DATE:

DRAWN BY: T. MCARDLE CHECKED BY: T. MCARDLE

SHEET TITLE: SHEET NO:

FOODSERVICE EQUIPMENT WALK-IN BEER COOLER DETAIL FS-11

SCALE: NONE