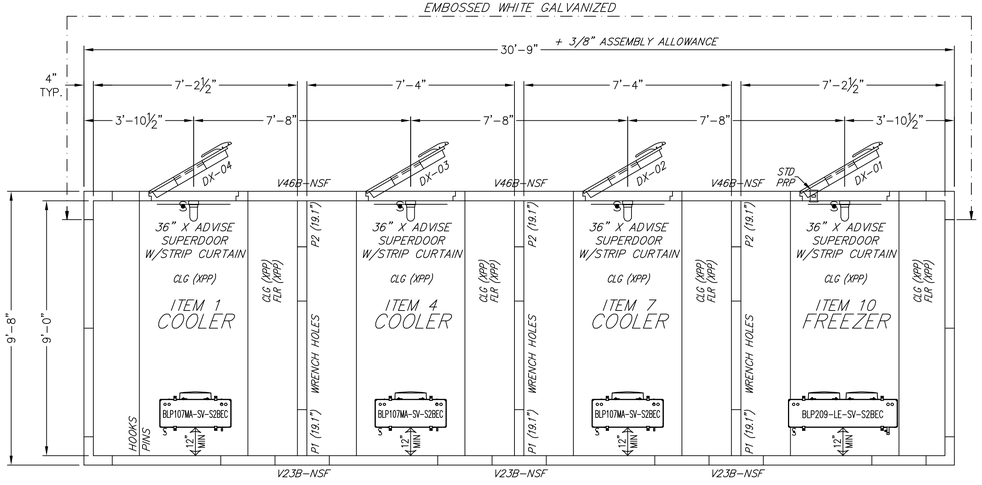


— PLAN VIEW A —

SPECIFICATIONS

30'-9" X 9'-8" X 8'-6"

INSTALLATION
- INDOOR
- LOADING HEIGHT – AT LEAST 18" OF OPEN SPACE MUST BE MAINTAINED BETWEEN TOP OF PRODUCT AND CEILING PANELS

INSULATION
- FOAMED IN-PLACE POURED URETHANE

EXTERIOR FINISH
- EMBOSSED WHITE GALVANIZED AS SHOWN
- EMBOSSED WHITE GALVANIZED CEILING
- EMBOSSED GALVALUME REMAINDER

INTERIOR FINISH
- EMBOSSED WHITE GALVANIZED

FLOOR FINISH
- (INTERIOR) 16GA. GALVANIZED STEEL
- (EXTERIOR) EMBOSSED GALVALUME

DOORS/ACCESSORIES
- (4) 36" X ADVISE RIGHT SWING HINGED WALK-IN DOOR
  - SUPERDOOR: 3RD HINGE, DT INT & EXT 36"H
  - PRP
  - STRIP CURTAIN
  - VAPOR-PROOF LIGHT W/ LED BULB
  - MODULARM 7SLC W/ MAG CONTACTS, PANIC BUTTON, MOTION DETECTOR
  - 14" x 24" HEATED OBSERVATION WINDOW
  - EXTERIOR CROSSOVER CORD

REFRIGERATION – BY BALLY (CONDENSING UNIT MOUNTED OUTDOORS)

1	2.5	R404A	BDM025-LE-HI3M	208-230/3/60	9.2	72.2	1	1.7	13.2	20	F
3	0.6	R404	BDM006-EE-HS2AB	208-230/1/60	4.6	26.5	1	1.7	7.5	15	C


- (4) HEATED & INSULATED RECEIVERS FOR CONDENSING UNITS
- (4) WINDGUARDS FOR CONDENSING UNITS

NOTE

GENERAL NOTES
- NOTE: BALLY TO FURNISH (4) K1810 48" LED LIGHTS. LIGHTS SHIPPED LOOSE AND MOUNTED AND WIRED BY OTHERS. (LIGHT SWITCH (12) AMPS MAX).
- NOTE: BALLY TO FURNISH EW CLOSURE TRIM. PLEASE ADVISE SIZE AND QUANTITY. ALL FASTENERS AND INSTALLATION BY OTHERS.

TILE THICKNESS

TO STOP TILE CRACKS OVER BALLY FLOORS, BALLY RECOMMENDS MINIMUM 2" TILE AND SETTING BED.

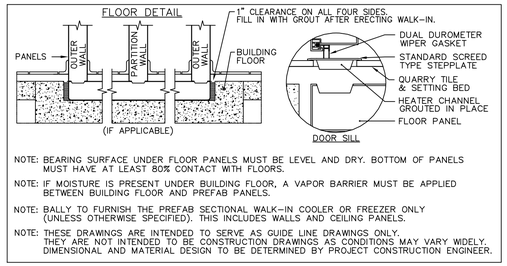


NOTE: BEARING SURFACE UNDER FLOOR PANELS MUST BE LEVEL AND DRY. BOTTOM OF PANELS MUST HAVE AT LEAST 80% CONTACT WITH FLOORS.

NOTE: IF MOISTURE IS PRESENT UNDER BUILDING FLOOR, A VAPOR BARRIER MUST BE APPLIED BETWEEN BUILDING FLOOR AND PREFAB PANELS.

NOTE: BALLY TO FURNISH THE PREFAB SECTIONAL WALK-IN COOLER OR FREEZER ONLY (UNLESS OTHERWISE SPECIFIED). THIS INCLUDES WALLS AND CEILING PANELS.


NOTE: THESE DRAWINGS ARE INTENDED TO SERVE AS GUIDE LINE DRAWINGS ONLY. THEY ARE NOT INTENDED TO BE CONSTRUCTION DRAWINGS AS CONDITIONS MAY VARY WIDELY. DIMENSIONAL AND MATERIAL DESIGN TO BE DETERMINED BY PROJECT CONSTRUCTION ENGINEER.

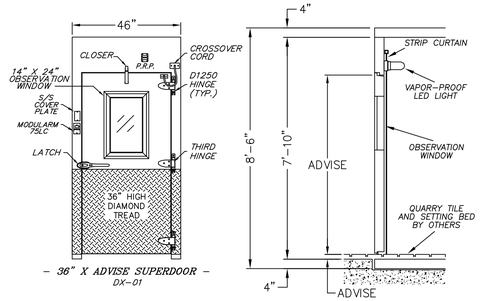

– 36" X ADVISE SUPERDOOR – DX-01

— SECTION VIEW — THRU ENTRANCE DOOR

SHEET 1 OF 2

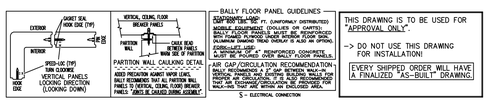

BALLY FLOOR PANEL GUIDELINES

FLOOR PANELS ARE 7", (UNIFORMLY DISTRIBUTED) MOBILE EQUIPMENT (DOLLIES OR CARTS). BALLY FLOOR PANELS MUST BE REINFORCED WHEN USING CARTS OR DOLLIES. (DIAMOND TREAD ALUMINUM DIAMOND TREAD OVERLAY IS ALSO AN OPTION)

FORKLIFT USE: MINIMUM 4" REINFORCED, CONCRETE SLAB TO BE POURED OVER BALLY FLOOR PANELS.

AIR GAP/CIRCULATION RECOMMENDATION: BALLY RECOMMENDS A 2" GAP BETWEEN WALK-IN VERTICAL PANELS AND EXISTING BUILDING WALLS FOR AIR CIRCULATION. THIS GAP IS ALSO RECOMMENDED THAT ANY FOOTPRINT INSULATION BE REMOVED FOR WALK-INS TO PROVIDE CIRCULATION IN INSULATED AREA.

S - ELECTRICAL CONNECTION

THIS DRAWING IS TO BE USED FOR "APPROVAL ONLY".

-> DO NOT USE THIS DRAWING FOR INSTALLATION!

EVERY SHIPPED ORDER WILL HAVE A FINALIZED "AS-BUILT" DRAWING.

RESTRICTED, CONFIDENTIAL DOCUMENT.

THIS DRAWING AND ALL INFORMATION SHOWN HEREON ARE THE EXCLUSIVE PROPERTY OF BALLY REFRIGERATED BOXES INC., AND ARE SUBMITTED ONLY ON A CONFIDENTIAL BASIS. THE RECIPIENT AGREES NOT TO REPRODUCE THE DRAWING, TO RETURN IT UPON REQUEST, AND THAT NO DISCLOSURE OF THE DRAWING OR THE INFORMATION SHOWN HEREON WILL BE MADE TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT FROM BALLY REFRIGERATED BOXES INC.

SIGNED APPROVAL

SIGNED _____

DATE _____

PLEASE READ

THIS DRAWING HAS BEEN CAREFULLY CHECKED BY OUR DRAFTING DEPARTMENT. HOWEVER, ERRORS OF INTERPRETATION CAN OCCUR. THEREFORE, BEFORE YOU RETURN DRAWING MARKED "APPROVED", BE CERTAIN THAT YOU CHECK THEM CAREFULLY.

NOTE – THIS ORDER WILL NOT BE SCHEDULED FOR PRODUCTION UNTIL RECEIPT OF APPROVED DRAWINGS BY BALLY.

IMPORTANT – PLEASE READ

THESE DRAWINGS ARE NOT TO BE CONSIDERED AS APPROVED BY LOCAL OR STATE BUILDING AUTHORITIES.

THEY HAVE BEEN PREPARED SOLELY FOR THE GUIDANCE OF REGISTERED ARCHITECTS AND ENGINEERS AND FOR THE ASSISTANCE OF LOCAL INSTALLERS. IT IS THE RESPONSIBILITY OF THE PROJECT ARCHITECT OR ENGINEER TO ASSURE THE BUILDING DESIGN MEETS LOCAL CODE REQUIREMENTS. THIS INCLUDES STRUCTURAL DESIGN AS WELL AS ANY WORK PERFORMED BY THE GENERAL CONTRACTOR, LOCAL INSTALLERS, OR OTHERS. BALLY REFRIGERATED BOXES INC., PROVIDES THESE SPECIFICATIONS, DOES NOT ASSUME ANY RESPONSIBILITY FOR THE SUCCESSFUL COMPLETION OR USAGE OF THE STRUCTURE DESCRIBED.

THE DRAWINGS AND SPECIFICATIONS DESCRIBE A BUILDING ASSEMBLED FROM BALLY PANELS INSULATED WITH URETHANE, "FOAMED-IN-PLACE". THE SIZE AND SHAPE IS THAT WHICH MOST CLEARLY MEETS DIMENSIONS SUBMITTED BY THE USER.

BALLY REFRIGERATED BOXES INC., PROVIDES PANELS FREQUENTLY SPECIFIED BY OTHERS, AND IS NOT RESPONSIBLE FOR THE SELECTION OR RECOMMENDATION BY OTHERS OF THE PANEL FINISH FOR ANY BUILDING OR WALK-IN APPLICATION.

REV	DESCRIPTION	BY	DATE

Bally REFRIGERATED BOXES INC.

BALLY (NC OFFICE): 1000 BALLY BLVD. BALLY, NC 28027 PHONE: (336) 345-3600 FAX: (336) 345-3384

BALLY (PA OFFICE): 1150 ROUTE 31, (SUITE 8) BALLY, PA 19503 PHONE: (610) 705-3310 FAX: (610) 705-3311

FOR THOMPSON POINT

DRAWING NUMBER: 5071916AD DATE: 07/25/16

DRAWN BY: RCB ORDER NUMBER: 5071916

LIN'D BY | DATE LIN'D | CHK'D BY

C:\Users\Thomas\Documents\TJM Logo's\TJM_Small_Logo.jpg

TJM CONSULTING, INC.
273 MAIN STREET, SUITE 5
YARMOUTH, MAINE 04096

PHONE: (207) 215-4736
E-MAIL: TOM@TJMCONSULTING.NETnet

THOMPSON POINT – BRICK SOUTH

CATERING KITCHEN

THIS DRAWING AND ALL INFORMATION HEREIN ARE THE PROPERTY OF THE DESIGNER AND MAY NOT BE USED OR COPIED, EITHER IN WHOLE OR IN PART, WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE DESIGNER

REV NO:	REVISIONS:

PROJECT: BRICK SOUTH KITCHEN

DATE:

DRAWN BY: T. MCARDLE

CHECKED BY: T. MCARDLE

SHEET TITLE: FOODSERVICE EQUIPMENT WALK-IN COOLER/FREEZER DETAILS

SHEET NO: FS-10

SCALE: 1/2"=1'-0"

Reviewed for Code Compliance
Please Note Stamps
Are Not Retroactive
Date: 11/22/16