





# Owner's Manual

Save this manual for future reference.

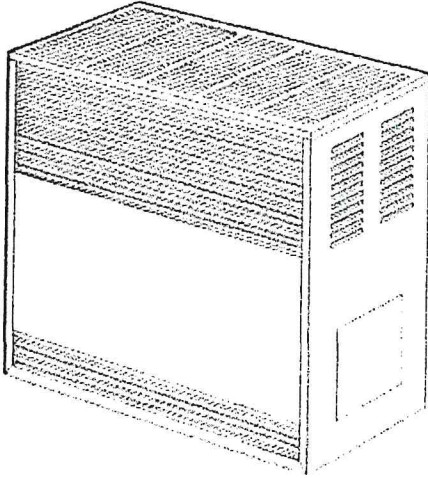

ENCLOSED MODEL

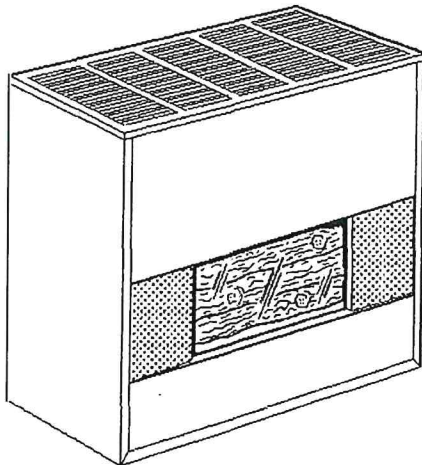

FIREPLACE MODEL



**WARNING:** Improper installation, adjustment, alteration, service or maintenance can cause injury or property damage. Refer to this manual. For assistance or for additional information consult a qualified installer, service agency or the gas supplier.

## Vented Room Heaters

### Model Numbers:

2001622A; 2011622A; 2031622A; 2051622A; 3501522A; 3511522A; 3531522A; 3551522A; 3501922A; 3511922A; 3531922A; 3551922A; 3502522A; 3511522A; 3532522A; 3552522A; 3502922A; 3512922A; 3532922A; 3552922A; 5001522A; 5011522A; 5031522A; 5051522A; 5012522A; 5001922A; 5011922A; 5031922A; 5051922A; 5002522A; 5012522A; 5032522A; 5052522A; 5002922A; 5012922A; 5032922A; 5052922A; 6501522A; 6511522A; 6531522A; 6551522A; 6501922A; 6511922A; 6531922A; 6551922A; 6502522A; 6512522A; 6532522A; 6552522A; 6502922A; 6512922A; 6532922A; 6552922A

FOR USE WITH NATURAL GAS ONLY

### Model Numbers:

2001621A; 2011621A; 2031621A; 2051621A; 3501521A; 3511521A; 3531521A; 3551521A; 3501921A; 3511921A; 3531921A; 3551921A; 3502521A; 3512521A; 3532521A; 3552521A; 3502921A; 3512921A; 3532921A; 3552921A; 5001521A; 5011521A; 5031521A; 5051521A; 5001921A; 5011921A; 5031921A; 5051921A; 5002521A; 5012521A; 5032521A; 5052521A; 5002921A; 5012921A; 5032921A; 5052921A; 6501521A; 6511521A; 6531521A; 6551521A; 6501921A; 6511921A; 6531921A; 6551921A; 6502521A; 6512521A; 6532521A; 6552521A; 6502921A; 6512921A; 6532921A; 6552921A

FOR USE WITH LIQUEFIED PETROLEUM (L.P.) GAS ONLY

READ THIS OWNER'S MANUAL CAREFULLY BEFORE YOU INSTALL YOUR NEW WILLIAMS HEATER.

**WARNING:** If the information in these instructions is not followed exactly, a fire or explosion may result causing property damage, personal injury or loss of life.

- Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.
- **WHAT TO DO IF YOU SMELL GAS:**
  - Open all windows.
  - Do not try to light any appliance.
  - Do not touch any electrical switch; do not use any phone or cell phone in your building.
  - Extinguish any open flame.
  - Immediately call your gas supplier from a neighbor's phone. Follow the gas supplier's instructions.
  - If you cannot reach the gas supplier, call the fire department.
- Installation and service must be performed by a qualified installer, service agency or the gas supplier.

**WARNING:** Installation and repair must be done by a qualified service person. The appliance should be inspected before use and at least annually by a professional service person.


# Vented Hearth Heaters

 **WILLIAMS**  
Comfort Products




35,000 - 65,000 Btu/hr.

Enjoy instant warmth plus lower heating cost with a traditional enclosed or fireplace-look heater!

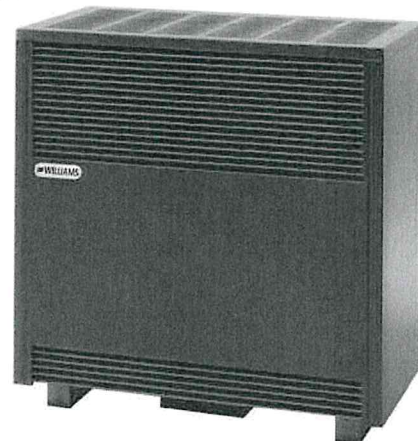

35,000 - 65,000 Btu/hr.

Our glass-front "fireplace-look" or enclosed vented hearth heaters provide comfort for hard-to-heat areas. Our vented hearth heaters are designed to give you maximum efficiency, low fuel consumption and quiet operation.

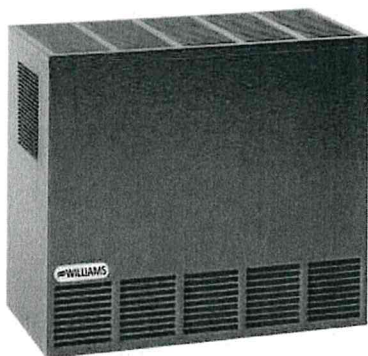

20,000 Btu/hr.

We have a compact enclosed model for smaller rooms that is both economical to purchase and operate.

## Design Features

- ✓ No electricity required
- ✓ "Matchless" pilot igniter
- ✓ Burners engineered for quiet ignition and maximum heat efficiency
- ✓ Louvered-top design and front grille for improved heat circulation
- ✓ Factory-installed ceramic fiber logs (fireplace models)
- ✓ Natural and propane models (Conversion kit available)
- ✓ Automatic temperature and safety controls
- ✓ Resettable vent-limit switch
- ✓ Thermostat included, may be wall- or cabinet-mounted



# Vented Hearth Heaters

Model Number		Btu/hr. Input	Btu/hr. Output	Efficiency Percentages		Dimensions			Vent Size	Center of Vent to Floor	Shipping Weight (lbs.)
Natural	Propane			Thermal	AFUE	Width	Depth	Height			
<b>ENCLOSED FRONT MODELS</b>											
2001622A	2001621A	20,000	15,500	77.5	71.0	23"	11"	21½"	3"	17"	45
3501522A	3501521A	35,000	25,000	71.0	68.0	25"	15¾"	28⅞"	4"	21¾"	74
* 3501922A	* 3501921A	35,000	25,000	71.0	68.0	25"	15¾"	28⅞"	4"	21¾"	83
5001522A	5001521A	50,000	34,500	69.0	68.0	30"	16"	32⅞"	4"	22¾"	103
* 5001922A	* 5001921A	50,000	34,500	69.0	68.0	30"	16"	32⅞"	4"	22¾"	112
6501522A	6501521A	65,000	47,000	72.0	70.0	34"	19¾"	32⅞"	5"	24¾"	128
* 6501922A	* 6501921A	65,000	47,000	72.0	70.0	34"	19¾"	32⅞"	5"	24¾"	137
<b>GLASS FRONT "FIREPLACE-LOOK" MODELS</b>											
3502522A	3502521A	35,000	25,000	71.0	68.0	25"	15¾"	28⅞"	4"	21¾"	81
* 3502922A	* 3502921A	35,000	25,000	71.0	68.0	25"	15¾"	28⅞"	4"	21¾"	90
5002522A	5002521A	50,000	34,500	69.0	68.0	30"	16"	32⅞"	4"	22¾"	108
* 5002922A	* 5002921A	50,000	34,500	69.0	68.0	30"	16"	32⅞"	4"	22¾"	117
6502522A	6502521A	65,000	47,000	72.0	70.0	34"	19¾"	32⅞"	5"	24¾"	135
* 6502922A	* 6502921A	65,000	47,000	72.0	70.0	34"	19¾"	32⅞"	5"	24¾"	144

\* Equipped with Blower • All models have ½" gas connection

## Features

### "Matchless" Pilot Igniter

All models include a "matchless" pilot igniter. Assures convenient pilot lighting without matches.

### Automatic Thermostat

No electricity required. All models are equipped with a self-generating millivolt thermostat that may be wall- or cabinet-mounted.


### Contemporary Finish

Contemporary black, powder-coat, scratch-resistant finish to complement any décor.

## Dimensions and Clearances

Model	A	B	C	D
200 Series	2"	36"	3"	24"
350, 500, & 650 Series	6"	57"	6"	24"

**Important:** Although the vent pipe is not shown, this product must be vented to the outside.

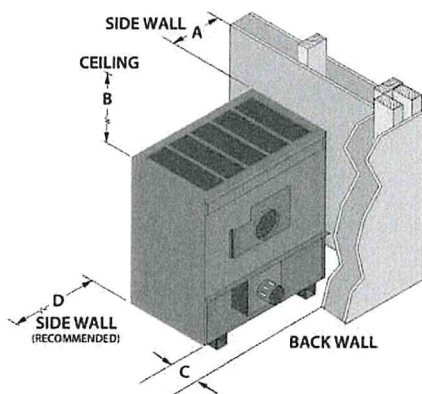

Great During Power Outages!  
No Electricity Required

## Accessories

### Vent Collars

Contemporary black color to match the heater with a powder-coat, scratch-resistant finish.

**Model 9102** for 3" vents. Shipping weight - 1 lbs.

**Model 9104** for 4" vents. Shipping weight - 1 lbs.

**Model 9106** for 5" vents. Shipping weight - 1 lbs.



### Floorboards

Contemporary black color to match the heater with a powder-coat, scratch-resistant finish.

**Model 4163** for 50,000 and 65,000 Btu/hr. models.

Oversized shipping weight - 16 lbs.

**Model 4167** for 20,000 and 35,000 Btu/hr. models.


Oversized shipping weight - 10 lbs.



### Blower

**Model 2102** A heavy-duty, quiet blower is available for larger rooms where faster heat circulation is desired. 150 CFM, 120V. Shipping weight - 9 lbs.

Not for use on 20016 series.



### Conversion Kits

Natural Gas to L.P. Gas or L.P. Gas to Natural Gas selections available.

## High Altitude Models

Elevation	Natural Gas Model Numbers				L.P. Gas Model Numbers			
	20,000 Btu/hr.	35,000 Btu/hr.	50,000 Btu/hr.	65,000 Btu/hr.	20,000 Btu/hr.	35,000 Btu/hr.	50,000 Btu/hr.	65,000 Btu/hr.
2,001' to 4,000'	2011622A	3511522A	5011522A	6511522A	2011621A	3511521A	5011521A	6511521A
		3511922A	5011922A	6511922A		3511921A	5011921A	6511921A
		3512522A	5012522A	6512522A		3512521A	5012521A	6512521A
		3512922A	5012922A	6512922A		3512921A	5012921A	6512921A
4,001' to 6,000'	2031622A	3531522A	5031522A	6531522A	2031621A	3531521A	5031521A	6531521A
		3531922A	5031922A	6531922A		3531921A	5031921A	6531921A
		3532522A	5032522A	6532522A		3532521A	5032521A	6532521A
		3532922A	5032922A	6532922A		3532921A	5032921A	6532921A
6,001' to 8,000'	2051622A	3551522A	5051522A	6551522A	2051621A	3551521A	5051521A	6551521A
		3551922A	5051922A	6551922A		3551921A	5051921A	6551921A
		3552522A	5052522A	6552522A		3552521A	5052521A	6552521A
		3552922A	5052922A	6552922A		3552921A	5052921A	6552921A



Scan for more information on Williams' products



## Important

- Read owner's manual before using/installing.
- Photographs are representative.
- Check local codes and ordinances for permitted uses.
- Consult installation manual for clearances prior to installation.
- We reserve the right to amend product specifications without notice.
- Installation and servicing recommended by a qualified service person.
- Venting must comply with the installation manual.
- Massachusetts approval G1-0713-515.
- Please read the warranty for any limitations for disclaimers.
- Combustion chamber carries a ten-year limited warranty. All other parts carry a one-year limited warranty.

**WILLIAMS**

250 West Laurel Street • Colton, California 92324 USA  
(909) 825-0993 • Fax: (909) 370-0581 or (909) 824-8009  
Consumer Line: (888) 256-6465  
www.e-wfc.com

facebook.com/WilliamsProducts • linkedin.com/company/williams  
twitter.com/WilliamsProduct • instagram.com/williamsproducts • youtube.com/user/WilliamsProducts