

ISSUED FOR CONSTRUCTION

/25/

/08

DEMOLITION

REMOVAL 1 REMOVE FIXTUI KEY NOTES:

- 2 REMOVE STALL PARTITIONS COMPLETE.

 3 REMOVE DOOR, FRAME AND HARDWARE COMPLETE. REMOVE FIXTURES (TOILETS, URINALS, SINKS, ETC.)
- 5 REMOVE JANITOR'S SINK & ALL RELATED ITEMS IN CLOSET. 4 REMOVE CEILING TILE AND GRID ASSEMBLY COMPLETE.
- 6 REMOVE **PARTITION** WALLS COMPLETE.
- REMOVE REMOVE PARTITION WALL TO 7'-0" AFF. SINK & VANITY COMPLETE.

 ∞


7


- 9 REMOVE BABY CHANGING STATION.
- RESERVED
- 13 REMOVE EXISTING FLOOR TILE TO SUBSTRATE. 12 REMOVE WALL FINISHES TO FACE OF PRECAST. PANEL SHALL BE CLEANED & PREPARED FOR APPLICATION OF NEW FINISHES REMOVE WALL FINISHES TO FACE OF STUD WALL (GWB, TILE, ETC.)
- REMOVE EXISTING CEILING LIGHTS, FANS, PIPING, DUCT WORK AND ALL OTHER EXISTING MECHANICAL & ELECTRICAL DRAWINGS. REMOVE ACCESSORIES SUCH AS TOILET PAPER & TOWEL DISPENSERS, VENDING MACHINES, & ALL OTHER WALL-MOUNTED ITEMS.
- REMOVE VINYL BASE ALONG ENTIRE LENGTH OF WALL. REMOVE WALL FINISHES TO FACE OF STUD. STUD WALL SHALL BE CLEANED & PREPARED FOR NEW FINISHES.

GENI ERAL REMOVALS NOTES:

COORDINATE EXTENT OF REMOVALS LOCATIONS WITH EXISTING FINISHES TO REMAIN, AND WITH LOCATIONS OF NEW WORK AS IDENTIFIED ON A-1.

- PROTECT ALL EXISTING FINISHES, MATERIALS AND EQUIPMENT TO REMAIN. CONTRACTOR SHALL BE RESPONSIBLE FOR REPLACEMENT OF ALL FINISHES, MATERIALS AND EQUIPMENT DAMAGED DURING CONSTRUCTION.
- THE FOLLOWING ITEMS SHALL BE SALVAGED FOR RE-USE AND RE-INSTALLATION BY CONTYRACTOR:
 CEILING LIGHTS
 FLUSH VALVES
 BABY CHANGING STATION
 SANOR-SYSYEM DISPENSERS (AT TOILETS & URINALS)
- "REMOVE" MEANS TO REMOVE AND DISPOSE OF ITEMS AS OUTLINED IN THE SPECIFICATIONS
- PREPARE ALL AREAS FOR FUTURE FINISHES.
- CONTRACTOR SHALL BE RESPONSIBLE AND SHALL PAY FOR PROPER DISPOSAL OF ALL DEMOLITION & CONSTRUCTION DEBRIS.
- DEMOLITION THAT HINDERS NORMAL JETPORT OPERATIONS (SUCH AS THE REMOVAL OF THE EXISTING TILE FLOORS) MAY BE REQUIRED TO BE PERFORMED AT NIGHT. COORDINATE WITH OWNER.

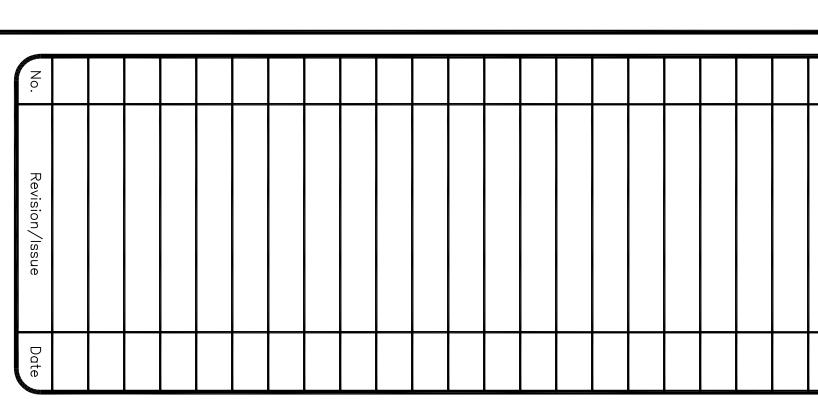

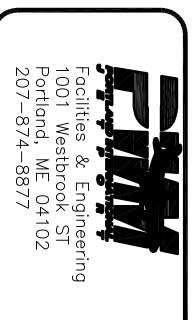

1001 Westbrook ST Portland, ME 04102 207-874-8877

UPPER RENOVATIONS JPPER LEVEL BATHROOM

DEMOLITION PLAN

