





REVISION	DATE	APPROVED	DESCRIPTION
0	2/1/24	PDM	CONVERTED DRAWINGS ISSUED FOR CONSTRUCTION
	3/22/24	PDM	ADDENDUM NO. 2
	3/22/24	PDM	ADDENDUM NO. 1
			DESCRIPTION
			DRAWN
			CHECKED
			APPROVED

PHILLIP J. DOUGHTY ASSOC. ARCHITECTS
362 U.S. ROUTE ONE, FALMOUTH, MAINE 04105 • 207.781.5346
WWW.ADDRESSES-HENRY.COM

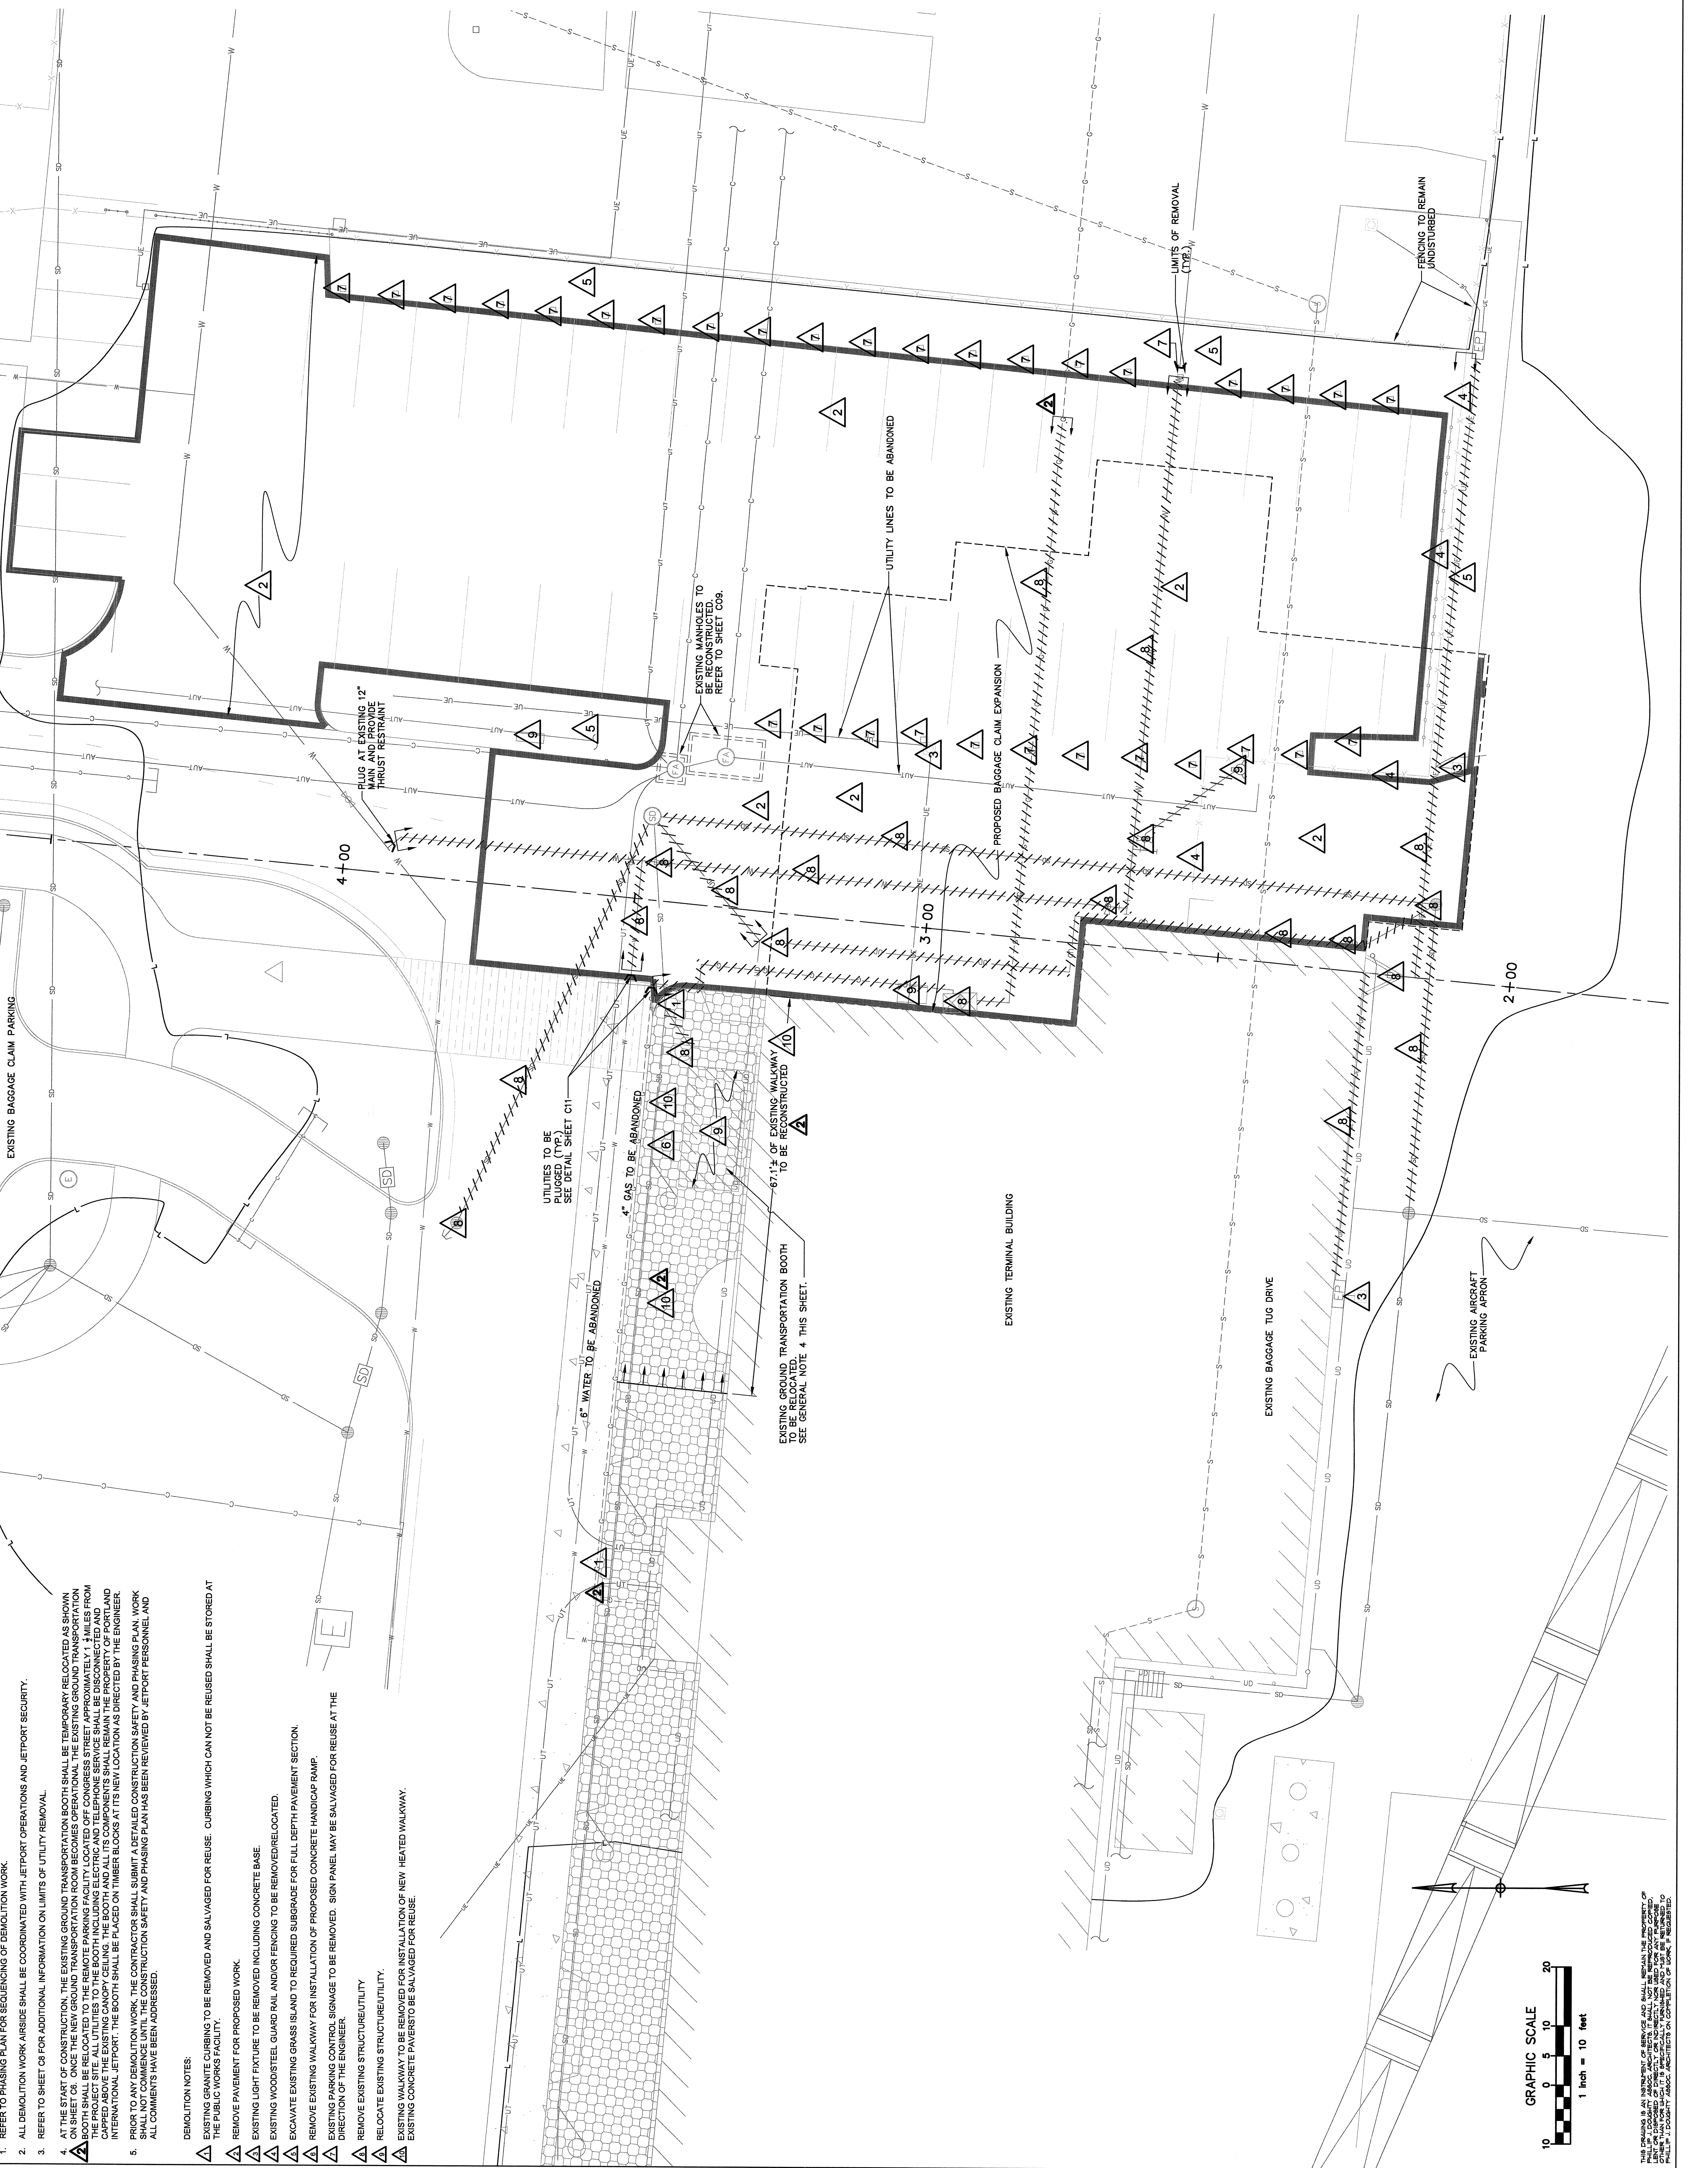

- GENERAL NOTES:**
- REFER TO PHASING PLAN FOR SEQUENCING OF DEMOLITION WORK.
 - ALL DEMOLITION WORK AROUND SHALL BE COORDINATED WITH JETPORT OPERATIONS AND JETPORT SECURITY.
 - REFER TO SHEET C8 FOR ADDITIONAL INFORMATION ON LIMITS OF UTILITY REMOVAL.
 - AT THE START OF CONSTRUCTION, THE EXISTING GROUND TRANSPORTATION BOOTH SHALL BE TEMPORARILY RELOCATED AS SHOWN ON THIS SHEET. THE EXISTING GROUND TRANSPORTATION BOOTH SHALL BE RELOCATED TO THE REMOTE PARKING FACILITY LOCATED OFF CONGRESS STREET. ALL UTILITIES TO THE BOOTH INCLUDING ELECTRIC AND TELEPHONE SERVICE SHALL BE DISCONNECTED AND CAPPED ABOVE THE EXISTING CANOPY CEILING. THE BOOTH AND ALL ITS COMPONENTS SHALL REMAIN THE PROPERTY OF PORTLAND INTERNATIONAL JETPORT. THE BOOTH SHALL BE PUGHED ON TIMBER BLOCKS AT ITS NEW LOCATION AS DIRECTED BY THE ENGINEER.
 - PRIOR TO ANY DEMOLITION WORK, THE CONTRACTOR SHALL SUBMIT A DETAILED CONSTRUCTION SAFETY AND PHASING PLAN. WORK PRIOR TO ANY DEMOLITION WORK SHALL BE REVIEWED BY JETPORT PERSONNEL AND ALL COMMENTS HAVE BEEN ADDRESSED.
- DEMOLITION NOTES:**
- EXISTING GRANITE CURBING TO BE REMOVED AND SALVAGED FOR REUSE. CURBING WHICH CAN NOT BE REUSED SHALL BE STORED AT THE PUBLIC WORKS FACILITY.
 - REMOVE PAVEMENT FOR PROPOSED WORK.
 - EXISTING LIGHT FIXTURE TO BE REMOVED/RELOCATED
 - EXISTING WOOD/STEEL GUARD RAIL AND/OR FENCING TO BE REMOVED/RELOCATED.
 - EXCAVATE EXISTING GRASS ISLAND TO REQUIRED SUBGRADE FOR FULL DEPTH PAVEMENT SECTION.
 - REMOVE EXISTING WALKWAY FOR INSTALLATION OF PROPOSED CONCRETE HANDICAP RAMP.
 - EXISTING PARKING CONTROL SIGNAGE TO BE REMOVED. SIGN PANEL MAY BE SALVAGED FOR REUSE AT THE DIRECTION OF THE ENGINEER.
 - REMOVE EXISTING STRUCTURE/UTILITY
 - RELOCATE EXISTING STRUCTURE/UTILITY.
 - EXISTING WALKWAY TO BE REMOVED FOR INSTALLATION OF NEW HEATED WALKWAY.
 - EXISTING CONCRETE PAVEMENT TO BE SALVAGED FOR REUSE.

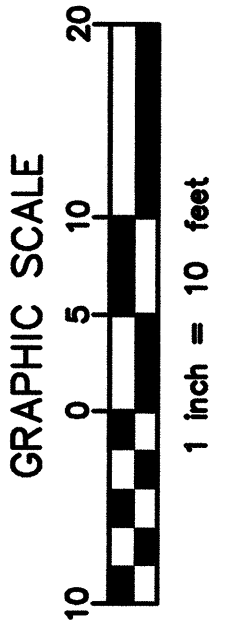

THIS DRAWING IS AN INSTRUMENT OF SERVICE AND SHALL REMAIN THE PROPERTY OF PHILLIP J. DOUGHTY ASSOC. ARCHITECTS. IT IS TO BE USED ONLY FOR THE PROJECT AND SITE SPECIFICALLY IDENTIFIED HEREON. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF PHILLIP J. DOUGHTY ASSOC. ARCHITECTS. NO LIABILITY IS ASSUMED FOR NEGLIGENCE OR OTHERWISE.

REVISION	DATE	APPROVED	DESCRIPTION
0	2/1/24	PDM	CONVERTED DRAWINGS ISSUED FOR CONSTRUCTION
	3/22/24	PDM	ADDENDUM NO. 2
	3/22/24	PDM	ADDENDUM NO. 1
			DESCRIPTION
			DRAWN
			CHECKED
			APPROVED

PHILLIP J. DOUGHTY ASSOC. ARCHITECTS
362 U.S. ROUTE ONE, FALMOUTH, MAINE 04105 • 207.781.5346
WWW.ADDRESSES-HENRY.COM