

**FOUNDATION NOTES:**

1. TYPICAL SLAB ON GRADE SHALL BE 4" THK CONCRETE OVER VAPOR BARRIER AND 6" THK COMPACTED GRANULAR BASE. SEE PROJECT GEOTECHNICAL REPORT FOR ADD'L INFO. SLAB SHALL BE REINFORCED WITH FLAT SHEET WWF 6x6-W1.4xW1.4 LOCATED 1-1/2" FROM TOP OF SLAB.
2. PROVIDE SLAB ON GRADE SAW-CUT CONTROL OR CONSTRUCTION JOINTS AT 20'-0" ON CENTER MAX. SEE 1/S6.1 FOR ADD'L INFO.
3.  $\nabla$  FFE=0'-0" DENOTES REF T/SLAB ON GRADE (FINISHED FLOOR) ELEVATION. SEE CIVIL DWGS FOR ACTUAL ELEVATION.
4. DENOTES CMU WALL. SEE GENERAL NOTES & S9.1 FOR ADD'L INFO & DETAILS.
5. WARP FINISHED CONCRETE SURFACE AT BLDG ENTRANCES AS REQ'D.
6. GEOTECHNICAL ENGINEER SHALL VERIFY EXISTING ALLOWABLE BEARING PRESSURE AT ALL FTG EXCAVATIONS PRIOR TO FTG PLACEMENT.
7. SEE ARCHITECTURAL DRAWINGS FOR EXACT DIMS TO INTERIOR BEARING WALLS, SLAB RECESSES, AND SLOPED AREAS.
8. SEE ARCHITECTURAL SLAB PLAN FOR ALL EDGE OF SLAB DIMENSIONS & SLAB ELEVATIONS NOT GIVEN.
9. SEE 7/S6.1 FOR FOUNDATION & CONCRETE WALL INFO AT PIPE PENETRATIONS.

**1 FOUNDATION PLAN**  
 S1.1 SCALE: 1/8" = 1'-0"

PROJECT

**PORTLAND  
 HILTON GARDEN  
 INN ADDITION**


LOCATION

**PORTLAND**  
 145 JETPORT BLVD  
 PORTLAND, MAINE 04102

ARCHITECT



STAMP

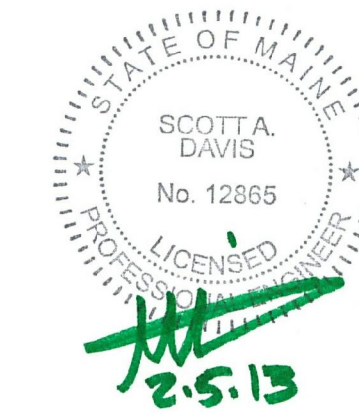

ISSUED FOR: DATE:

REVIEW

PRICING JULY 20, 2012

PERMITTING JAN 30, 2013

CONSTRUCTION

REVISIONS

THIS DRAWING IS THE PROPERTY OF HC ARCHITECTURE, INC. AND IS NOT TO BE REPRODUCED OR COPIED IN WHOLE OR IN PART. IT IS ONLY TO BE USED FOR THE PROJECT SPECIFICALLY IDENTIFIED HEREIN AND IS NOT TO BE USED ON ANY OTHER PROJECT. IT IS TO BE RETURNED UPON REQUEST. SCALES AS STATED HEREIN ARE VALID ON THE ORIGINAL DRAWING. THE DIMENSIONS OF WHICH ARE 30x42 INCHES.

JOB NO.

**0479.000**

DRAWING TITLE

**FOUNDATION  
 PLAN**

SHEET NO.

**S1.1**