
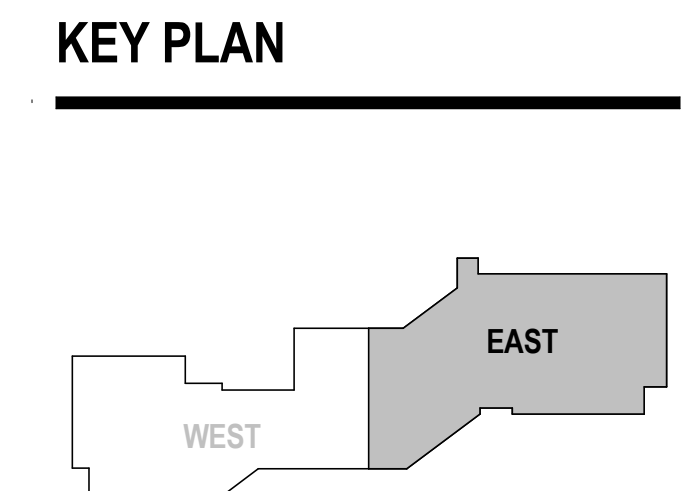


01 REFLECTED CEILING PLAN - LEVEL 01 - EAST
SCALE: 1/8" = 1'-0"

- SHEET NOTES**
- 01 OPEN CEILING: ALL EXPOSED STRUCTURE, DUCTWORK, CONDUIT, ETC. TO BE FINISHED TO MATCH P7. REFER TO FINISH LEGEND FOR MORE INFORMATION.
 - 02 REMOVE ALL STICKERS & LABELS PRIOR TO PAINTING. REPLACE STICKERS & LABELS AS REQUIRED.
 - 03 GC TO COORDINATE INSTALLATION OF SOUND MASKING SYSTEM PRIOR TO FINISHPAINTING AT OPEN CEILING AREAS. SPEAKERS TO BE PAINTED TO MATCH CEILING FINISH.
 - 05 SOUND ABSORBING PANEL SECURED DIRECTLY TO DECK. REFER TO FINISH LEGEND.
 - 08 EXISTING POWER POLE TO BE REUSED, REFER TO FURNITURE PLAN.

- GENERAL NOTES**
- ALL CEILINGS TO BE 9'-4"; U.N.O.
 - REFER TO SERIES G00 FOR GRAPHIC SYMBOLS, ABBREVIATIONS, GENERAL NOTES AND TYPICAL MOUNTING DIAGRAMS FOR SWITCHES AND DIMMERS.
 - DO NOT SCALE DRAWINGS. WRITTEN DIMENSIONS GOVERN. IN CASE OF CONFLICT, NOTIFY ARCHITECT. ARCHITECT'S REFLECTED CEILING PLAN SUPERSEDES ALL OTHERS.
 - DRAWINGS TO BE READ IN CONJUNCTION WITH LIGHTING FIXTURES SCHEDULE AND SPECIFICATIONS BY ELECTRICAL ENGINEER. IN CASE OF CONFLICT, NOTIFY ARCHITECT PRIOR TO PROCEEDING.
 - REFER TO ENGINEER'S DRAWINGS FOR LIGHTING, DIFFUSERS, SPRINKLERS, FIRE ALARM DEVICES AND OTHER ITEMS IN THE CEILING.
 - VERIFY LOCATION AND SIZE OF ALL ACCESS PANELS IN GYPSUM CEILINGS WITH ARCHITECT.
 - ALL LIGHTS, SPRINKLER HEADS, SPEAKERS, EXIT SIGNS, AND OTHER CEILING-MOUNTED DEVICES IN APC TO BE CENTERED IN TILE IN BOTH DIRECTIONS, U.N.O.

- PROVIDE SHADOW MOULD AT ALL PERIMETER CONDITIONS OF APC. U.N.O.
- ALL GYPSUM BOARD CEILINGS AND SOFFITS TO BE FABRICATED WITH 5/8" SAG-RESISTANT GYPSUM BOARD.
- ALL GYPSUM BOARD CEILINGS AND SOFFITS TO BE PAINTED P7, U.N.O.
- SUSPENDED CEILING GRID SYSTEM AND ACOUSTIC PANEL TO BE C1, U.N.O.
- CENTER CEILING GRID AND TILE IN ROOMS AS SHOWN, U.N.O.
- BOTTOM OF ALL SUSPENDED LIGHT FIXTURES TO BE AT 9'-4"
- REFER TO ELECTRICAL DRAWINGS FOR LIGHT FIXTURE SCHEDULE
- INSTALL NEW ROLLER SHADES AT ALL EXTERIOR WINDOWS. REFER TO DETAIL 09A06.201 FOR ADDITIONAL INFORMATION.

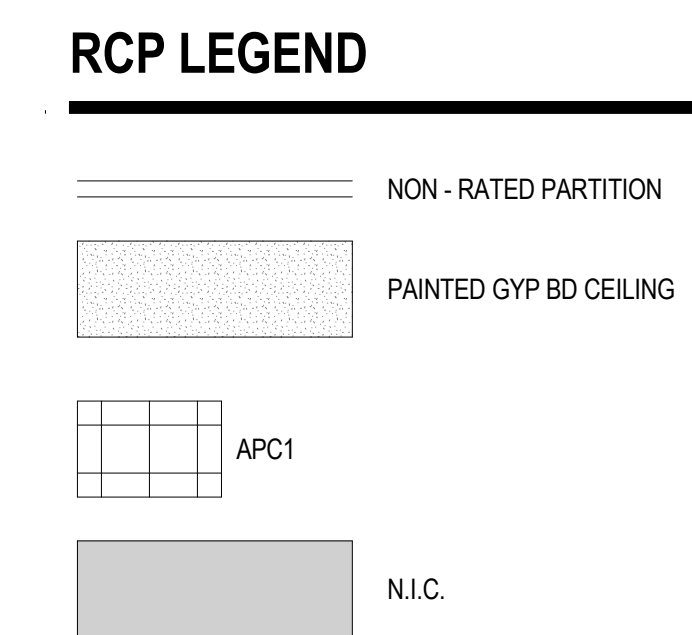

Date	Description
08/18/17	ISSUE FOR PERMIT & CONSTRUCTION
08/25/17	ADDENDUM #1
09/01/17	ADDENDUM #2
09/06/17	ADDENDUM #3

Seal / Signature

Project Name
Unum Workplace Transformation - Phase 1 (H02)

Project Number
59.6481.003

Description
REFLECTED CEILING PLAN - LEVEL 01 - EAST - H02

Scale
1/8" = 1'-0"

A02.201E

9/6/2017 11:28:14 AM I:\gensler\ad\projects\Revit\Level\ceiling\A02.201E-PORTLAND-H02_2016_25408.rvt