



**01 FINISH PLAN - LEVEL 01 - EAST**  
SCALE: 1/8" = 1'-0"

**SHEET NOTES**


- 02 REFER TO DETAIL 05/A08.200 FOR CARPET TRANSITION INSTALL. CONTRACTOR TO COORDINATE ON SITE MOCKUP INSTALL OF CARPET TRANSITION FOR ARCHITECTS APPROVAL PRIOR TO INSTALLATION OF FINAL PRODUCT.
- 04 ALL EXISTING WINDOW SILLS TO BE PAINT SPRAYED SEMI-GLOSS. TYPICAL THROUGHOUT ENTIRE FLOOR PLATE.
- 06 GC TO PROVIDE AND INSTALL CLEAR CORNER GUARD. REFER TO SPEC ON SHEET A00.020
- 07 STAIR SCOPE ITEMS TO BE PART OF ADD SERVICE #2 PRICING.

**GENERAL NOTES**

- A. REFER TO SERIES A00 FOR GRAPHIC SYMBOLS, ABBREVIATIONS AND GENERAL NOTES.
- B. REFER TO SHEET A00.020 AND A00.021 FOR FINISH MATERIALS LEGEND.
- C. GENERAL CONTRACTOR TO COORDINATE EXTENT OF FINISHES WITH ELEVATIONS AND ENLARGED PLANS.
- D. ALL PARTITIONS TO RECEIVE P1 PAINT AND RB1 BASE, U.N.O.
- E. GYPSUM BOARD CEILINGS AND SOFFITS TO BE PAINTED P8.
- F. ALL NEW AND EXISTING DOORS TO BE PAINT SPRAYED SEMI-GLOSS TO MATCH ADJACENT PARTITION.
- G. ALL FLOOR FINISH TRANSITIONS AT DOORS SHALL OCCUR AT CENTERLINE OF DOOR, U.N.O. REFER TO SHEET A08.200 FOR TYPICAL FLOOR FINISH TRANSITION DETAILS.
- H. ALL INTERIOR FINISHES SHALL COMPLY WITH SECTION 803 AND/OR 804 OF THE 2015 IBC.
- I. NO WALL BASE BEHIND ARCHITECTURAL MILLWORK, ALL EXPOSED PARTITIONS TO RECEIVE WALL BASE.
- J. NO CUTS ON OUTSIDE WALL CORNERS FOR RUBBER WALL BASE.
- K. TRANSITION MOCKUP OF CPT REQUIRED BEFORE INSTALLATION.

**KEY PLAN**

Date: 08/18/17  
Description: ISSUE FOR PERMIT & CONSTRUCTION

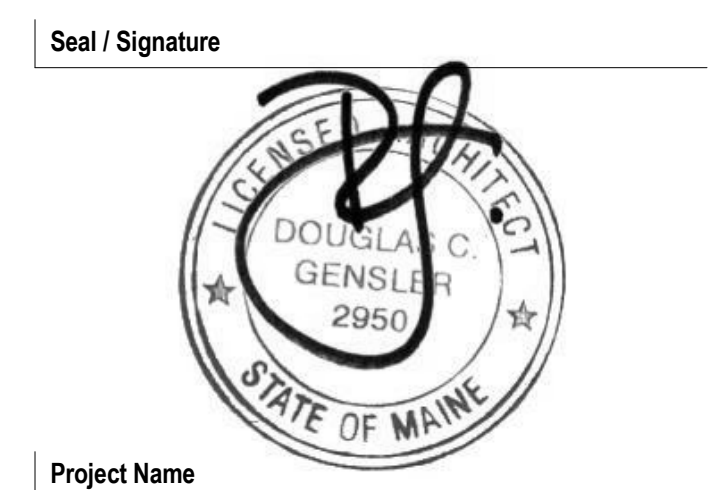

Project Name: Unum Workplace Transformation- Phase 1 (H02)  
Project Number: 59.6481.003  
Description: FINISH PLAN - LEVEL 01 EAST - H02

Scale: 1/8" = 1'-0"

**102.101E**