

Date	Description
08/18/17	ISSUE FOR PERMIT & CONSTRUCTION


01 FINISH PLAN - LEVEL 01 - WEST
SCALE: 1/8" = 1'-0"

- SHEET NOTES**
- 02 REFER TO DETAIL 05/A08.200 FOR CARPET TRANSITION INSTALL. CONTRACTOR TO COORDINATE ON SITE MOCKUP INSTALL OF CARPET TRANSITION FOR ARCHITECTS APPROVAL PRIOR TO INSTALLATION OF FINAL PRODUCT.
 - 04 ALL EXISTING WINDOW SILLS TO BE PAINT SPRAYED SEMI-GLOSS. TYPICAL THROUGHOUT ENTIRE FLOOR PLATE.
 - 05 CARPET TRANSITION TO NEW COLOR, PATTERN AND/OR COMBINATION.
 - 06 GC TO PROVIDE AND INSTALL CLEAR CORNER GUARD. REFER TO SPEC ON SHEET A00.020
 - 07 STAIRS SCOPE ITEMS TO BE PART OF ADD SERVICE #2 PRICING.

- GENERAL NOTES**
- A. REFER TO SERIES A00 FOR GRAPHIC SYMBOLS, ABBREVIATIONS AND GENERAL NOTES.
 - B. REFER TO SHEET A00.020 AND A00.021 FOR FINISH MATERIALS LEGEND.
 - C. GENERAL CONTRACTOR TO COORDINATE EXTENT OF FINISHES WITH ELEVATIONS AND ENLARGED PLANS.
 - D. ALL PARTITIONS TO RECEIVE P1 PAINT AND RB1 BASE, U.N.O.
 - E. GYPSUM BOARD CEILINGS AND SOFFITS TO BE PAINTED P8.
 - F. ALL NEW AND EXISTING DOORS TO BE PAINT SPRAYED SEMI-GLOSS TO MATCH ADJACENT PARTITION.

- G. ALL FLOOR FINISH TRANSITIONS AT DOORS SHALL OCCUR AT CENTERLINE OF DOOR, U.N.O. REFER TO SHEET A08.200 FOR TYPICAL FLOOR FINISH TRANSITION DETAILS.
- H. ALL INTERIOR FINISHES SHALL COMPLY WITH SECTION 803 AND/OR 804 OF THE 2015 IBC.
- I. NO WALL BASE BEHIND ARCHITECTURAL MILLWORK. ALL EXPOSED PARTITIONS TO RECEIVE WALL BASE.
- J. NO CUTS ON OUTSIDE WALL CORNERS FOR RUBBER WALL BASE.
- K. TRANSITION MOCKUP OF CPT REQUIRED BEFORE INSTALLATION.

KEY PLAN

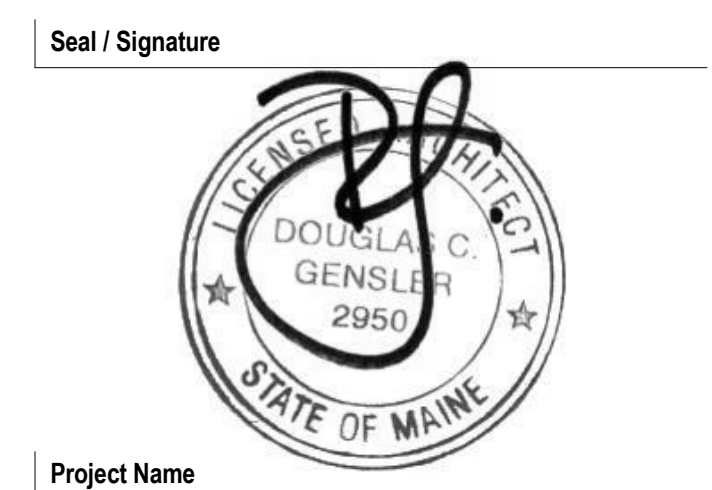

Project Name
Unum Workplace Transformation- Phase 1 (HO2)

Project Number
59.6481.003

Description
FINISH PLAN - LEVEL 01 WEST - HO2

Scale
1/8" = 1'-0"

102.101W

8/18/2017 6:57:29 PM I:\gensler\ad\projects\Renov\Unum\A00\003-1\UNUM - PORTLAND - HO2_2016_MichaelThomasGensler.rvt