

01 DEMOLITION PLAN - LEVEL 01 - WEST
SCALE: 1/8" = 1'-0"

SHEET NOTES

- 02 DEMOLISH EXISTING WALL.
- 03 DEMOLISH EXISTING DOOR AND FRAME. COORDINATE STORAGE OF HARDWARE SET FOR REUSE WITH OWNER.
- 06 EXISTING ACCESS FLOORING TO REMAIN. VENTS TO BE REDISTRIBUTED AFTER FINAL FURNITURE CONFIGURATION. COORDINATE WITH FURNITURE DRAWINGS, TYP.
- 10 REMOVE EXISTING FLOOR FINISH, TYP.
- 14 DEMOLISH EXISTING CMU BLOCK WALL AS REQUIRED FOR NEW OPENING.
- 16 DEMOLISH ALL DECORATIVE COLUMNS, REPRESENTED BY CROSSHATCH, TYP.
- 17 REMOVE AND DISPOSE OF ALL EXISTING PLUMBING FIXTURES, TOILET PARTITIONS AND TOILET ACCESSORIES.
- 21 REMOVE EXISTING DOOR AND HARDWARE SET, PREP OPENING FOR NEW CASED OPENING. PROVIDE HARDWARE SET TO OWNER.
- 22 GC TO PREFORM EXPLORATORY DEMOLITION. CONFIRM WITH ARCHITECT ANY EXISTING UTILITIES.
- 24 STRIP FINISH OF EXISTING WOOD SILLS AND PREP FOR PAINT, TYP.
- 25 REMOVE EXISTING ELEVATOR CABIN FINISHES. GC COORDINATE WITH VENDOR FOR REQUIRED PREPARATION.
- 26 EXISTING FIRE EXTINGUISHER CABINET TO REMAIN. PREP FOR PAINT FINISH TO MATCH ADJACENT FINISH. GO TO CONFIRM FIRE EXTINGUISHER CAN BE REUSED.
- 30 EXISTING WINDOW TO REMAIN
- 31 EXISTING WALL TO DECK TO REMAIN. COORDINATE WITH PLAN, PATCH AND REPAIR AS REQUIRED.
- 37 REMOVE INTERIOR GYP BD AND STUDS AS REQUIRED FOR INSTALLATION OF EXTERIOR WINDOW AND WATERPROOFING

GENERAL NOTES


- A. DEMOLISH ALL PARTITIONS AND ASSOCIATED FIXTURES AS SHOWN DASHED, U.N.O.
- B. DEMOLITION DRAWINGS ARE DIAGRAMMATIC AND DO NOT INTEND TO SHOW THE FULL EXTENT OF ALL AREAS AFFECTED BY UTILITY DEMOLITION AND RECONSTRUCTION. DEMOLITION SHALL INCLUDE ALL ITEMS INDICATED ON THE DEMOLITION PLANS AND ALL OTHER ITEMS REQUIRED TO BE DEMOLISHED TO ACCOMPLISH CONSTRUCTION INDICATED ELSEWHERE IN THE CONTRACT DOCUMENTS. IF QUESTIONS ARISE AS TO THE REMOVAL OF MATERIAL IN ACCORDANCE WITH THE CONTRACT DOCUMENTS, CLARIFY THE POINT IN QUESTION WITH THE ARCHITECT BEFORE PROCEEDING.
- C. PROVIDE TEMPORARY WEATHER PROTECTION DURING INTERVAL BETWEEN DEMOLITION AND REMOVAL OF EXISTING CONSTRUCTION ON EXTERIOR SURFACES, AND INSTALLATION OF NEW CONSTRUCTION TO ENSURE THAT NO WATER LEAKAGE OR DAMAGE OCCURS TO STRUCTURE OR INTERIOR AREAS OF EXISTING BUILDING. REMOVE PROTECTIONS AT COMPLETION OF WORK.
- D. AS NOTED, ALL FLOOR FINISHES TO BE REMOVED, THE SLAB LEVELED AS REQUIRED, AND PREPARED FOR NEW FINISHES.
- E. REFER TO SERIES G00 FOR GRAPHIC SYMBOLS, ABBREVIATIONS AND GENERAL NOTES.

- F. REMOVE ALL EXISTING WALL FINISHES AND WALL BASE AT COLUMNS, PERIMETER WALLS, AND CORE WALLS WHERE NEW FINISHES ARE NOTED. PATCH AND PREPARE PARTITIONS AS REQUIRED TO ACCEPT NEW WALL BASE.
- G. PROVIDE PROTECTIVE BARRICADES, PROTECTIVE CANOPIES, AND OTHER FORMS OF PROTECTION AS REQUIRED TO PROTECT OWNERS' PERSONNEL AND GENERAL PUBLIC FROM INJURY AND TO PROVIDE FREE AND SAFE PASSAGE DUE TO SELECTIVE DEMOLITION WORK. CONSTRUCT TEMPORARY INSULATED SOLID DUST PROOF PARTITIONS WHERE REQUIRED TO SEPARATE AREAS WHERE NOISY OR EXTENSIVE DIRT OR DUST OPERATIONS ARE PERFORMED. EQUIP PARTITIONS WITH DUST PROOF DOORS AND SECURITY LOCKS IF REQUIRED.
- H. REMOVE ALL VERTICAL BLIND WINDOW TREATMENTS AND PREP HEADER FOR ROLLER SHADES AS SCHEDULED. REFER TO RCP.
- I. REMOVAL OF ANY EQUIPMENT, CABLING SWITCHES, AND CONDUIT PERTAINING TO DATA/ COMMUNICATIONS AND TELEPHONE SHALL BE VERIFIED WITH TELEPHONE COMPANIES SERVICE OWNER OR TENANT DATA/ COMMUNICATIONS REPRESENTATIVE AS REQUIRED TO PREVENT NEW CONSTRUCTION DELAYS.
- J. MAINTAIN EXISTING UTILITIES TO REMAIN, KEEP IN SERVICE. IDENTIFY AND PROTECT AGAINST DAMAGE DURING DEMOLITION OPERATIONS.
- K. REMOVE TO SOURCE ALL PIPES, VENTS APPLIANCES OR DRAINS NOT BEING RE-USED.
- L. REFER TO PLUMBING, MECHANICAL, AND ELECTRICAL DRAWINGS FOR ADDITIONAL DEMOLITION, RECONSTRUCTION, AND PROTECTION INFORMATION.
- L. PATCH AND REPAIR AT ALL LOCATIONS WHERE DEVICES AND/OR EXISTING WALLS HAVE BEEN REMOVED.

DEMO LEGEND


- EXISTING WALLS / DOORS TO BE DEMOLISHED
- EXISTING DIRT WALL, REMOVED BY OWNER
- 1-HOUR RATED WALL
- 2-HOUR RATED WALL
- EXISTING WALL
- NOT IN CONTRACT

KEY PLAN

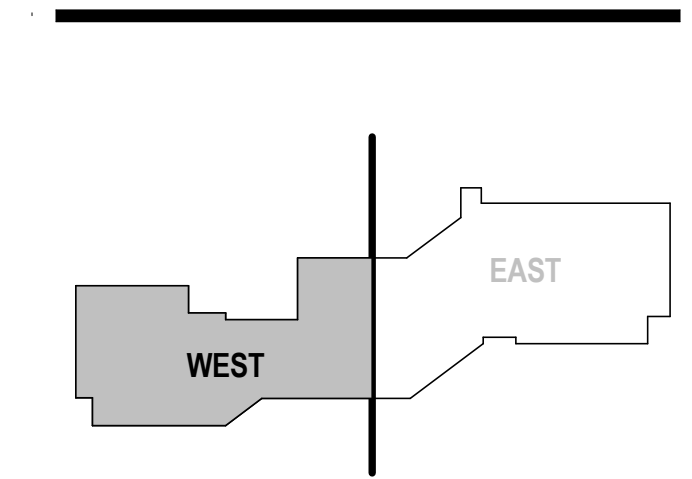

Date	Description
08/18/17	DEMOLITION & EARLY WORK

Seal / Signature

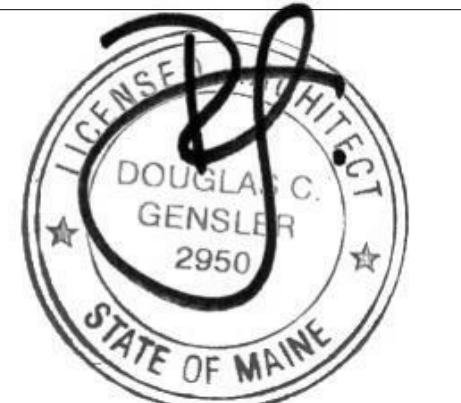

Project Name
Unum Workplace Transformation- Phase 1 (HO2)

Project Number
59.6481.003

Description
DEMOLITION PLAN - LEVEL 01 WEST

Scale
As indicated

A01.101W

8/18/2017 6:06:59 PM I:\genstar\adp\projects\Revit\A01.101W - PORTLAND - HO2 - UNUM - PORTLAND - HO2_2016_MichaelThomasGensler.rvt