

- GENERAL NOTES:**
(APPLY TO THIS SHEET ONLY)
- COORDINATE ALL DEVICE LOCATIONS AND MOUNTING HEIGHTS WITH THE ARCHITECT & FURNITURE VENDOR PRIOR TO INSTALLATION.
 - HATCHED AREA NOT IN THIS SCOPE OF WORK.
 - 'E' DENOTES EXISTING DEVICE TO REMAIN, 'R' DENOTES EXISTING DEVICE TO BE RELOCATED, 'D' DENOTES EXISTING ITEM TO BE REMOVED.
 - VERIFY PROPER FUNCTIONALITY OF ALL EXISTING AND RELOCATED FIRE ALARM DEVICES, INCLUDING THEIR HOUSING, LENSES, ETC... PROVIDE REPLACEMENTS AS REQUIRED IF ANY ARE NOT OPERATING AS INTENDED OR HAVE ABOVE NORMAL WEAR OR DEFECTS.
 - ALL WIRING WITHIN AND THROUGH THE OPEN TO STRUCTURE AREAS SHALL BE IN EMT.

- LEGEND NOTES:**
(APPLY TO THIS SHEET ONLY)
- EXISTING DEVICE TO BE RELOCATED INTO NEW CEILING. EXTEND ALL ASSOCIATED CONDUIT AND WIRING AS REQUIRED.

2211 Congress Street
Portland, ME 04122

Gensler


214 North Tryon Street
Suite 2320
Charlotte, NC 28202
United States
Tel 704.377.2725
Fax 704.377.2807

BW & A

Jeffery Scott Lowery, P.E.
420 Mutual Lane
Charlotte, NC 28217
Tel 704.357.9333
MEP JOB# 170358

Date	Description
12.15.2017	ISSUE FOR PERMIT AND CONSTRUCTION

Seal / Signature

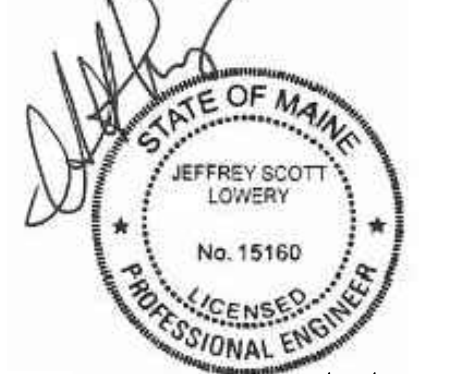

Project Name 12/15/17

Unum Workplace Transformation
- Phase 2 & 3 (H02 & H03)

Project Number
59.6481.003

Description
1ST FLOOR PLAN (AREA N) - H03 -
FIRE ALARM

Scale
1/8" = 1'-0"

E2.301N

© 2017 Gensler

E2.301N 1ST FLOOR PLAN (AREA N) - FIRE ALARM
1/8" = 1'-0"