


2ND FLOOR PLAN - HVAC
 M2.102N 1/8"=1'-0"

GENERAL NOTES:

- COORDINATE THE EXACT LOCATION OF ALL THERMOSTATS WITH FINAL FURNITURE LAYOUT, EQUIPMENT LAYOUT, ARCH AND OWNERS REPRESENTATIVE. NEW T'STATS SHALL MATCH BASE BUILDING T'STATS IN EVERY RESPECT. CONTRACTOR SHALL THE NEW T'STATS INTO BUILDING EMS AND UPDATE IT ACCORDINGLY.
- ALL THERMOSTATS LOCATED ON WOOD AND/OR FEATURE WALLS SHALL BE BUTTON TYPE. SEE PLANS FOR EXACT LOCATIONS. COORDINATE WITH ARCHITECTS FINISH PLANS.
- THERE WILL BE NO LEAD ACID BATTERIES EXCEEDING A TOTAL OF 50 GALLONS OF ELECTROLYTE CAPACITY.
- ARCHITECTURAL DRAWINGS ARE TO BE USED FOR FINAL LOCATION OF DIFFUSERS, MECHANICAL PLAN DIFFUSER LOCATIONS ARE FOR REFERENCE ONLY.
- COORDINATE DIFFUSER SELECTIONS WITH CEILING TYPES AND ARCHITECTURAL FEATURES. SEE ARCHITECTURAL PLANS FOR ELEVATIONS AND MATERIALS.
- ALL BOXES SHALL BE LOCATED IN AN AREA THAT ALLOWS SERVICING.
- ALL HVAC CONTROLS MUST BE TIED INTO THE BUILDINGS' BAS SYSTEM.
- ALL DEMOLISHED HVAC EQUIPMENT WILL NOT BE DAMAGED DURING REMOVAL AND SHALL BE RETURNED TO THE OWNER. OWNER SHALL BE GIVEN PROPER NOTICE BEFORE TRANSFERRING EQUIPMENT.
- CONTRACTOR SHALL WALK FLOOR WITH OWNER TO ENSURE ALL BOXES WILL BE ACCESSIBLE ABOVE CEILING PRIOR TO CEILING INSTALLATION.
- ALL EXTERIOR THERMOSTATS SHALL BE INSULATED BEHIND TO AVOID INFILTRATION FROM EXTERIOR.
- CONTRACTOR SHALL PROVIDE A LINED RETURN AIR BOOT SIZED TO LIMIT THE MAXIMUM RETURN AIR VELOCITY TO NO MORE THAN 300 FEET PER MINUTE TO SERVE ANY ROOM WITH ALL WALLS TO DECK.

LEGEND NOTES:
(APPLY THIS SHEET ONLY)

- RELOCATE EXISTING THERMOSTAT TO NEW LOCATION SHOWN. COORDINATE WITH NEW FURNITURE LAYOUT AND ARCHITECT PRIOR TO INSTALLING IN NEW LOCATION.
- DEMO EXISTING DUCTWORK TO THE LOCATION INDICATED AND CAP. SEAL ANY OPENINGS IN DUCTWORK WITH SHEETMETAL AND "HARDCAST".



2211 Congress Street
Portland, ME 04122




214 North Tryon Street
Suite 2320
Charlotte, NC 28202
United States
Tel 704.377.2725
Fax 704.377.2807



Bruce W. Williams, P.E.
420 Mineral Lane
Charlotte, NC 28217
Tel 704.357.9333
MEP JOB# 170358

Date	Description
12.15.2017	ISSUE FOR PERMIT AND CONSTRUCTION

Seal / Signature

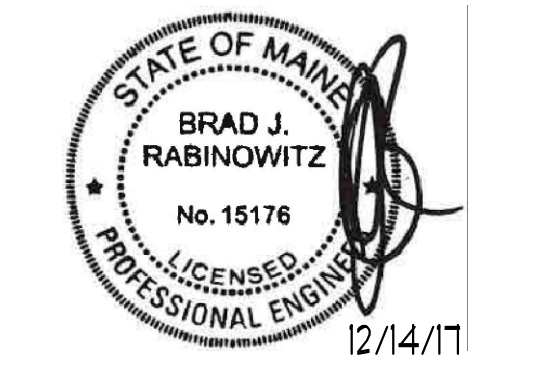

Project Name

Unum Workplace Transformation
- Phase 2 & 3 (HO2 & HO3)

Project Number

59.6481.003

Description

2ND FLOOR PLAN - HVAC

Scale

M2.102N