

ROOM FINISH SCHEDULE

NO.	ROOM NAME	FLOOR MATERIAL	BASE MATERIAL	WALLS				TRIM/ FRAMES MATERIAL	MILLWORK SURFACES		CEILING		REMARKS
				NORTH	EAST	SOUTH	WEST		HORIZONTAL	VERTICAL	MATERIAL	HT	
100	ENTRY VESTIBULE	MAT1	VB1	P2	P2	P2	P2	P1	-	-	ACT	-	1,2,4
101	MAIN WAITING	CPT1	VB1	P2	P2, P3	P2, P3	P2,P3	P1	WD, PL1	-	ACT	-	1,2,3,4
102	CHECK-IN ADMINISTRATION	CPT2	VB1	P2, P3	P2, P3	P2, P3	P2, P3	P1	PL1	PL2	ACT	-	1,2,3,4
103	PHONE TRIAGE	CPT2	VB1	P2	P3	P2	P2	P1	-	-	ACT	-	1,2,3,4
104	DOC'S OFFICES	CPT2	VB1	P2	P2, P3	P2	P2, P3	P1	-	-	ACT	-	1,2,3,4
105	CONF/ BREAK ROOM	VCT1, VCT2	VB1	P2	P3	P2	P2	P1	PL1	PL2	ACT, GWB	-	1,2,3,4
106	CLEAN SUPPLY	VCT1	VB1	P2	P2	P2	P2	P1	WD	-	GWB	-	1,2,3,4
107	CLEAN SUPPLY	VCT1	VB1	P2	P2	P2	P2	P1	WD	-	GWB	-	1,2,3,4
108	LOCKER ALCOVE	VCT1, VCT2	VB1	P2	P2	P2	P2	P1	-	-	ACT	-	1,2,3,4
109	STAFF SHOWER	VCT1	VB1	P3	P3	P3	P3	P1	-	-	ACT	-	1,2,3,4
110	STAFF COATS	VCT1	VB1	P2	P2	P2	P2	P1	WD	-	GWB	-	1,2,3,4
111	JANITORS	VCT1	VB1	FRP	FRP	FRP	FRP	P1	-	-	GWB	-	1,2,3,4
112	JANITOR'S SUPPLIES	VCT1	VB1	P2	P2	P2	P2	P1	WD	-	GWB	-	1,2,3,4
113	STAFF TLT	VCT1	VB1	P3	P2	P2	P2	P1	-	-	ACT	-	1,2,3,4
114	OFFICE SYDNEY	CPT2	VB1	P3	P2	P2	P2	P1	-	-	ACT	-	1,2,3,4
115	OFFICE SANDY	CPT2	VB1	P3	P2	P2	P2	P1	-	-	ACT	-	1,2,3,4
116	OFFICE BRENDA	CPT2	VB1	P2	P2	P3	P2	P1	-	-	ACT	-	1,2,3,4
117	(F) PAT. TLT	VCT1, VCT2	VB1	P2	P2	P3	P2	P1	-	-	ACT	-	1,2,3,4
118	(M) PAT. TLT	VCT1, VCT2	VB1	P2	P3	P2	P2	P1	-	-	ACT	-	1,2,3,4
119	MA STATION	CPT2	VB1	P3	P2	P3	P2	P1	PL1	PL2	ACT	-	1,2,3,4
120	VOICE/ DATA	VCT1	VB1	P2	P2	P2	P2	P1	-	-	ACT	-	1,2,3,4
120	VOICE/ DATA	VCT1	VB1	P2	P2	P2	P2	P1	-	-	ACT	-	1,2,3,4
121	OFFICE	CPT2	VB1	P2	P2	P3	P2	P1	-	-	ACT	-	1,2,3,4
122	STORAGE	VCT1	VB1	P2	P2	P2	P2	P1	-	-	ACT	-	1,2,3,4
123	ESA	VCT1, VCT2	VB1	P2	P2	P3	P2	P1	PL1	PL2	ACT	-	1,2,3,4
124	SOILED HOLDING	VCT1	VB1	P2	P2	P2	P2	P1	-	-	ACT	-	1,2,3,4
125	TESTING LAB	VCT1, VCT2	VB1	P2	P2	P3	P3	P1	PL1	PL2	ACT	-	1,2,3,4
126	PHLEBOTOMY LAB	VCT1, VCT2	VB1	P2	P2	P2	P3	P1	PL1	PL2	ACT	-	1,2,3,4
127	LAB OFFICE	CPT2	VB1	P3	P2	P2	P2	P1	-	-	ACT	-	1,2,3,4
128	LAB SUB-WAITING	CPT1	VB1	P3	P3	P2	P2	P1	WD	-	ACT	-	1,2,3,4
129	PAT. TLT	VCT1, VCT2	VB1	P3	P2	P2	P2	P1	-	-	ACT	-	1,2,3,4
130	PAT. TLT	VCT1, VCT2	VB1	P2	P2	P3	P2	P1	-	-	ACT	-	1,2,3,4
131	EXAM NO. 1	VCT1, VCT2	VB1	P3	P2	P2	P2	P1	PL1	PL2	ACT	-	1,2,3,4
132	EXAM NO. 2	VCT1, VCT2	VB1	P2	P3	P2	P2	P1	PL1	PL2	ACT	-	1,2,3,4
133	EXAM NO. 3	VCT1, VCT2	VB1	P2	P2	P2	P3	P1	PL1	PL2	ACT	-	1,2,3,4
134	EXAM NO. 4	VCT1, VCT2	VB1	P3	P2	P2	P2	P1	PL1	PL2	ACT	-	1,2,3,4
135	EXAM NO. 5	VCT1, VCT2	VB1	P3	P2	P2	P2	P1	PL1	PL2	ACT	-	1,2,3,4
136	EXAM NO. 6	VCT1, VCT2	VB1	P2	P2	P3	P2	P1	PL1	PL2	ACT	-	1,2,3,4
137	EXAM NO. 7	VCT1, VCT2	VB1	P2	P3	P2	P2	P1	PL1	PL2	ACT	-	1,2,3,4
138	EXAM NO. 8	VCT1, VCT2	VB1	P2	P2	P2	P3	P1	PL1	PL2	ACT	-	1,2,3,4
139	EXAM NO. 9	VCT1, VCT2	VB1	P2	P2	P3	P2	P1	PL1	PL2	ACT	-	1,2,3,4
140	EXAM NO. 10	VCT1, VCT2	VB1	P2	P2	P3	P2	P1	PL1	PL2	ACT	-	1,2,3,4
141	FILES	VCT1, VCT2	VB1	P2	P2	P2	P3	P1	-	-	ACT	-	1,2,3,4

A5 ROOM FINISH SCHEDULE

REFERENCED FROM: SCALE: N/A

ROOM FINISH SCHEDULE (CONTINUED)

NO.	ROOM NAME	FLOOR MATERIAL	BASE MATERIAL	WALLS				TRIM/ FRAMES MATERIAL	MILLWORK SURFACES		CEILING		REMARKS
				NORTH	EAST	SOUTH	WEST		HORIZONTAL	VERTICAL	MATERIAL	HT	
142	CORRIDOR	VCT1, VCT2	VB1	-	P2	-	P3	P1	-	-	ACT	-	1,2,3,4,5
142	CORRIDOR	VCT1, VCT2	VB1	-	P2	-	P3	P1	-	-	ACT	-	1,2,3,4
143	CORRIDOR	VCT1, VCT2	VB1	P2	P2	P2	-	P1	-	-	ACT	-	1,2,3,4
144	CORRIDOR	VCT1, VCT2	VB1	P3	P2	P2, P3	-	P1	-	-	ACT	-	1,2,3,4
145	CORRIDOR	VCT1, VCT2	VB1	P2	-	P3	-	P1	-	-	ACT	-	1,2,3,4,5
146	CLEAN SUPPLY	VCT1	VB1	P2	P2	P2	P2	P1	WD	-	GWB	-	1,2,3,4
147	CORRIDOR	VCT1, VCT2	VB1	-	P3	-	P3	P1	-	-	ACT	-	1,2,3,4
148	CORRIDOR	VCT1, VCT2	VB1	P3	-	P2, P3	-	P1	PL1	-	ACT	-	1,2,3,4,5
149	CORRIDOR	VCT1, VCT2	VB1	P2	-	P3	P3	P1	-	-	ACT	-	1,2,3,4,5
150	CORRIDOR	VCT1, VCT2	VB1	P3	P3	P2, P3	P2, P3	P1	WD	-	ACT	-	1,2,3,4,5
161	DOC'S OFFICES	CPT2	VB1	P2	P3	P2	P2, P3	P1	-	-	ACT	-	1,2,3,4
162	CORRIDOR	CPT2	VB1	P3	P2	P2	P2	P1	-	-	ACT	-	1,2,3,4
163	DOC'S OFFICES	CPT2	VB1	P2	P2, P3	P2	P3	P1	-	-	ACT	-	1,2,3,4

ABBREVIATIONS

ACT = ACOUSTICAL SUSPENDED CEILING SYSTEM
 CPT = CARPET FLOORING
 ETR = EXISTING TO REMAIN
 P = PAINT FINISHES
 VB = VINYL BASE
 VCT = VINYL COMPOSITION TILE

REMARKS

- PATCH AND REPAIR INTERIOR SURFACES WITHIN LIMITS OF WORK. PREPARE SURFACES FOR NEW FINISHES PER FINISH MANUFACTURER'S RECOMMENDATIONS. REFERENCE INTERIOR FINISH LEGEND AND SPECIFICATIONS.
- REFERENCE FLOOR FINISHES PLAN FOR FLOOR PATTERNS.
- REFERENCE FLOOR FINISHES PLAN FOR ACCENT PAINT COLOR LOCATIONS.
- REFERENCE REFLECTED CEILING PLAN AND SPECIFICATIONS FOR ACT PRODUCTS, MATERIALS AND LOCATIONS.
- ALTERNATE: REPLACE VCT1 AND VCT2 AS INDICATED IN ROOM FINISH SCHEDULE WITH CPT1.

E3 ROOM FINISH SCHEDULE (CONTINUED)

REFERENCED FROM: SCALE: N/A

INTERIOR FINISH LEGEND

CODE	MATERIAL	MANUFACTURER	COLOR	FINISH	REMARKS / NOTES
MAT1	ENTRY MAT	MATS, INC	COLOR: 51 GRAY	FACTORY	
CPT1	CARPET	SHAW CONTRACT GROUP	COLOR: 64545 PISTACHIO	FACTORY	
CPT2	CARPET	SHAW CONTRACT GROUP	TBD	FACTORY	
VCT1	VINYL COMPOSITE TILE	MANNINGTON COMMERCIAL	COLOR: 143 FLAX	SEALED	
VCT2	VINYL COMPOSITE TILE	MANNINGTON COMMERCIAL	COLOR: 235 MOSS	SEALED	
VB1	VINYL WALL BASE	JOHNSONITE	COLOR: 281 GRIZZLY	FACTORY	
TR	TRANSITION STRIP	JOHNSONITE	COLOR: 29 MOON ROCK	FACTORY	
P1	PAINT	SHERWIN WILLIAMS	COLOR: SW7053 ADAPTIVE SHADE	SEMI-GLOSS	TRIM
P2	PAINT	SHERWIN WILLIAMS	COLOR: SW7557 SUMMER WHITE	SATIN	NEUTRAL
P3	PAINT	SHERWIN WILLIAMS	COLOR: SW6164 SVELTE SAGE	SATIN	ACCENT WALL
PL1	PLASTIC LAMINATE	WILSONART	4667-60, GREEN TIGRIS	FACTORY	COUNTERTOP SURFACES
PL2	PLASTIC LAMINATE	WILSONART	10776-60 KENSINGTON MAPLE	FACTORY	CABINET FRONTS, VERTICAL SURFACES


REFERENCE SPECIFICATION FOR PRODUCT INFORMATION.

E5 INTERIOR FINISH LEGEND

REFERENCED FROM: SCALE: N/A



CWS Architects

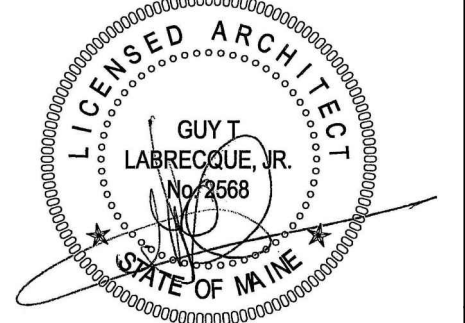

OWNER / DEVELOPER
164 REALTY, LLC
 100 SILVER STREET
 PORTLAND, ME 04101

PROJECT TITLE
**NEPHROLOGY ASSOCIATES
 RENOVATIONS**
 1600 CONGRESS STREET
 PORTLAND, MAINE 04101

DRAWING TITLE
FINISH LEGEND & SCHEDULE
 CWS PROJ. NO.: 11422

DATE	REVISION DESCRIPTION

DRAWING NUMBER

A0.01

SCALE: N/A
 DATE: 12/22/11