
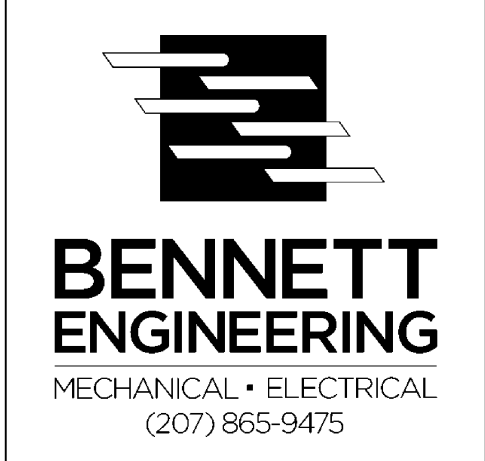


- Demolition & General Notes**
1. Coordinate mechanical demolition with the Architectural Demolition Drawings. Remove existing piping, fixtures, plumbing equipment, and other work as indicated on the Drawings and as required to install the new systems. Cap existing piping as indicated and as required.
 2. Coordinate work to avoid disruption to the other building tenants.
 3. See the existing conditions Mechanical Drawings for additional information and field-verify prior to performing Demolition Work.
 4. Plumbing vents shall terminate a minimum of 20'-0" from any outside air intakes.
 5. Provide concrete slab cutting as required for new sanitary drainage piping.

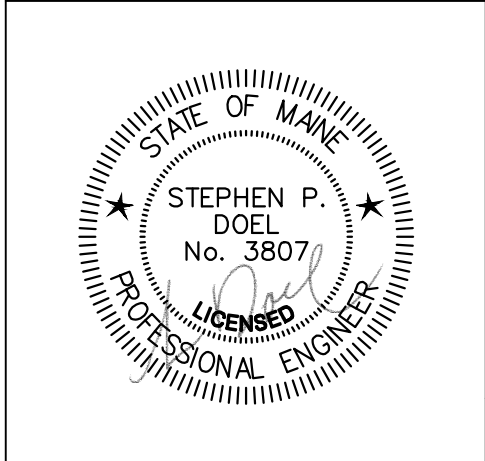

OWNER / DEVELOPER
COMMERCIAL PROPERTIES, INC.
 100 SILVER STREET
 PORTLAND, ME 04101

PROJECT TITLE
NEPHROLOGY ASSOCIATES - RENOVATIONS
 1600 CONGRESS STREET
 PORTLAND, MAINE

DRAWING TITLE
PLUMBING PLAN
 CWS PROJ. NO.: 11422

REVISION DESCRIPTION	DATE
ISSUED FOR CONSTRUCTION	12/22/11

DRAWING NUMBER
P1.01
 SCALE: 3/16" = 1'-0" U.N.O.
 DATE: 12/22/2011