

△ OMIT BRICK WALL
SEE DWG. NO. V.E.-1.0
NEW BRICK WALL TO
MATCH - SEE DETAILS
DWG. NO. A-3.1


EXIST. MASONRY WALL
EXIST. CONC. STEPS
REMAIN

SEE DWG. NO. A-21 FOR
NORTH ENTRY DETAILS
△ OMIT NORTH
ENTRY SEE DWG.
NO. V.E.-1.0

GENERAL CONSTRUCTION NOTES

1. THE CONTRACTORS SHALL VERIFY ALL EXISTING CONDITIONS INCLUDING MECHANICAL AND ELECTRICAL CONDITIONS TO ASCERTAIN THE EXTENT OF THE WORK REQUIRED.
2. THE CONTRACTORS SHALL BE RESPONSIBLE FOR PROVIDING REQUIRED MATERIALS AND WORKMANSHIP IN ACCORDANCE WITH FEDERAL, STATE, AND LOCAL BUILDING CODES AND THEIR REQUIREMENTS. CONTRACTORS SHALL BE RESPONSIBLE FOR PAYING AND OBTAINING PERMITS AND APPROVALS AS REQUIRED BY LOCAL JURISDICTIONAL AUTHORITIES FOR THE JOB.
3. BEFORE COMMENCING WORK, THE CONTRACTORS SHALL VERIFY THAT NO CONFLICTS EXIST IN LOCATIONS OF ANY AND ALL MECHANICAL, SPRINKLER, AND ELECTRICAL, INCLUDING PIPING, DUCTWORK, LIGHTING AND/OR STRUCTURAL TO ENSURE THAT ALL REQUIRED CLEARANCES OR INSTALLATIONS FOR ABOVE EQUIPMENT ARE PROVIDED.
4. FAILURE TO REPORT ANY DISCREPANCIES WITHIN THESE CONSTRUCTION DOCUMENTS TO THE ARCHITECT WILL NOT BE GROUNDS FOR ADDITIONAL COST OR FOR CHANGE ORDERS. IF FIELD CONDITIONS NECESSITATE ANY CHANGES OR MODIFICATIONS, ALL SUCH CHANGES OR MODIFICATIONS SHALL BE APPROVED BY THE ARCHITECT PRIOR TO PERFORMING SUCH CHANGES OR MODIFICATIONS.
5. PROVIDE FOR THE LEGAL REMOVAL AND DISPOSAL OF ALL CONSTRUCTION DEBRIS AND RUBBISH FROM THE BUILDING AND CONSTRUCTION SITE. RECYCLE CONSTRUCTION DEBRIS.
6. PROVIDE TEMPORARY WEATHER TIGHT ENCLOSURES FOR THE DURATION OF THE PROJECT. THE CONTRACTOR SHALL BE RESPONSIBLE FOR BUILDING DAMAGE CAUSED BY THE FAILURE OF THE TEMPORARY ENCLOSURE.

Project No.	0813
Scale	As Shown
Drawn By	DLL
Checked By	DLL
Date	8-25-09
Revision	
By	
Date	

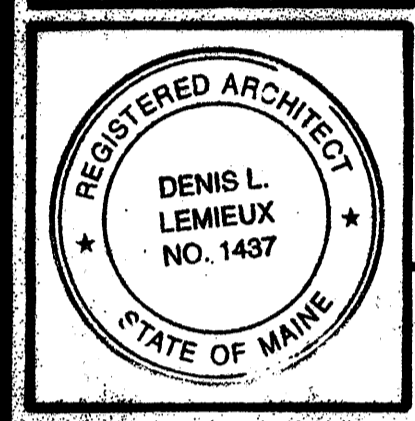

Project Title
Hutchins Funeral Home
660 Brighton Avenue
Portland, Maine

Drawing Title	Lower Level Floor Plans
Project No.	0813
Sub Title	
Drawing No.	A-1.0

October 28, 2009
Issued for Construction

DLL Associates / Architects