GENERAL ROOFING NOTES

VALLEY FLASHING SHALL BE 18" WIDE 24 GAGE GALVANIZED SHEET METAL, 10-FOOT MAXIMUM LENGTHS, LAP 8" MIN, BLIND NAIL UPPER END AND HAVE A "V" CRIMP AT MIDDLE

ROOF SHEATHING TO BE 5/8" CDX, APA GRADE, UNLESS NOTED OTHERWISE

PROVIDE "ICE AND WATER SHIELD" MEMBRANE UNDERLAYMENT TO EXTEND FROM EAVE OR RAKE TO A POINT 2'-0" MINIMUM BEYOND THE INTERIOR WALL LINE

PROVIDE "ICE AND WATER SHIELD" MEMBRANE TO LINE VALLEYS MINIMUM 2'-0" EACH SIDES

PROVIDE 30# FELT UNDERLAYMENT OVER THE ENTIRE ROOF

APPLY DRIP EDGE AT RAKE OVER THE UNDERLAYMENT

NAILS SHOULD PENETRATE DECKING ¾". DO NOT USE STAPLES, THIS IS A HIGH WIND APPLICATION

PROVIDE NEOPRENE BOOT AND A PREASSEMBLED METAL BASE PAN THAT'S WOVEN INTO THE ROOF SHINGLES TO FLASH VENT PIPES PENETRATIONS. SET ASSEMBLY IN PLASTIC ROOFING CEMENT

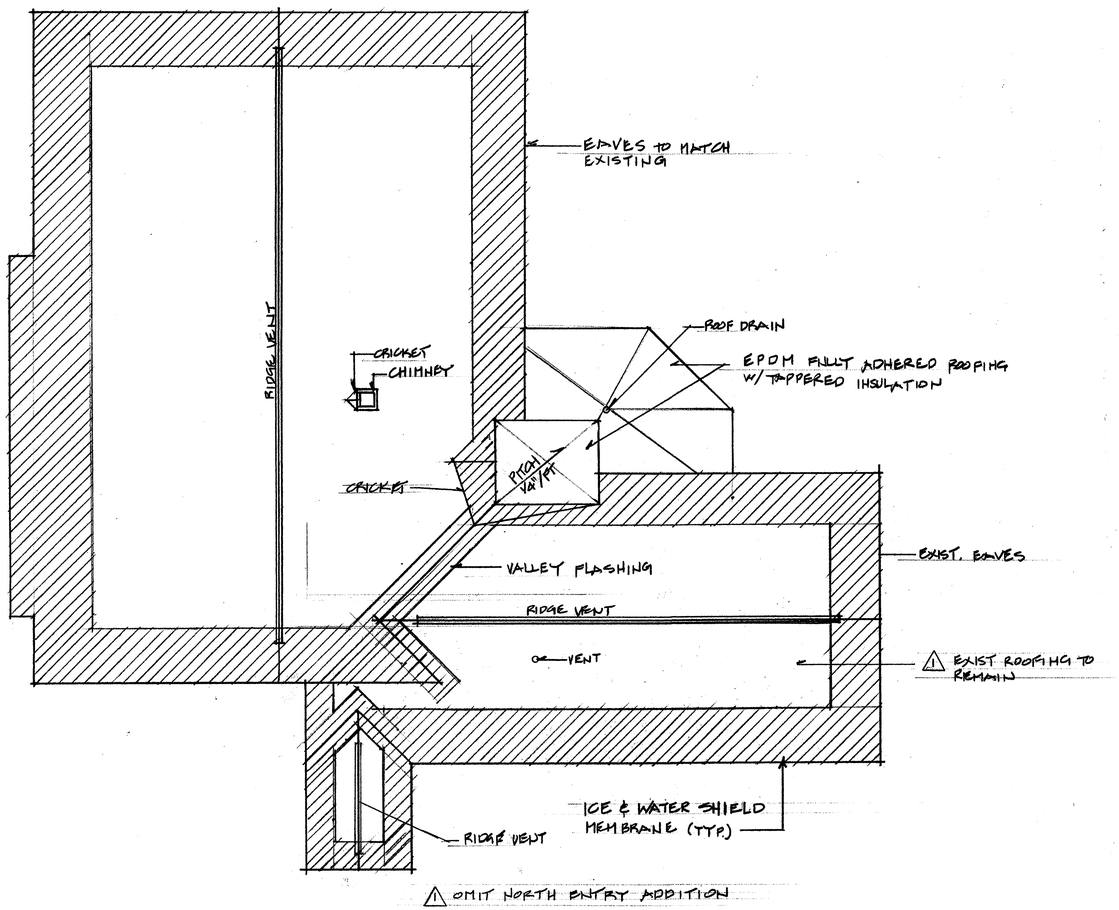

ROOF PLAN
1/8"= 1'-0"

October 28, 2009
Issued for Construction

DLL Associates / Architects
198 Main Street, Suite – C Lewiston, Maine 04240 (207) 344-6611 DLLAIA@AOL.COM

No.	Revisions	Date	By
1	VALUE ENGINEERING MODIFICATIONS	10-28-09	DLL

REGISTERED ARCHITECT
DENIS L. LEMIEUX
NO. 1437
STATE OF MAINE

Project Title
Hutchins Funeral Home
660 Brighton Avenue
Portland, Maine

Drawing Title
Roof Plan and Details

Scale NOTED | Ckd.By
Dwn.By DLL | Date

Project No.
0813

Sub Title

Drawing No.
A-5.0

15837