

BRIGHTON AVENUE

SEE PLAN A FOR ALTERATIONS IN EXIST. PLANTING AT THIS LOC.

REMOVE ALL TREES IN THIS AREA EXCEPT 'GROUND COVER' PLANTS (SEE PLAN A - THIS SHEET)

(SEE PLAN A - THIS SHEET)

REMOVE ALL SHRUBS ALONG EXISTING WALL & RELOCATE @ WALK & DRIVEWAY

TRIM EXIST. HONEY-SUCKLE TO 4 1/2 FT
TRIM EXIST. YEN TO 4-4 1/2 FT (SAME OPPOSITE SIDE OF PLANTING)

PARKING

NEW SIGN SAME LOC. AS OLD SIGN REMOVE EXIST. YENS (2)

TRIM TREES, REMOVE UNDERGROWTH, FERTILIZE AS RECOMMENDED BY ARBORIST

RELOCATE 3' DEEP HITCH W/ 6' BENCH (C/M)

LACK MULCH, UNLESS OTHERWISE NOTED

EXIST. FERTILIZERS PLANTS


PLAN A

1" = 10' - 0"

NOTE: SHRUBS SHALL BEAR SAME RELATION TO GRADE AS PRIOR TO PLANTING.

3" BARK MULCH W/ 4" SAUCER REMOVE BURLAP FROM TOP 1/3 BALL

SOIL MIX NOTES:
4 PARTS TOPSOIL, 1 PART HUMUS FOR EVERGREENS
4 PARTS TOPSOIL, 1 PART MANURE FOR DECIDUOUS SHRUBS

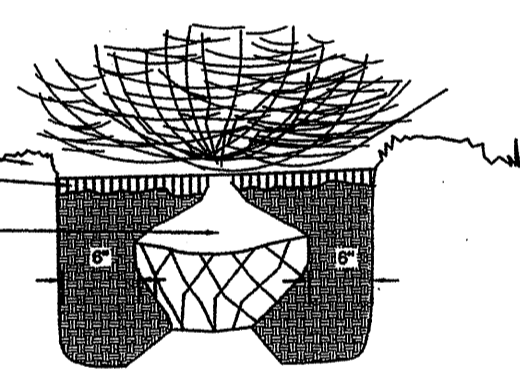

PLANTING DETAIL - SHRUB

1

N.T.S.

PLANT LIST

PLANT	SIZE	ROOT	QTY	NOTES
A. <i>REYNA VINCETOXICA</i> (L. FERN) VEG. CHIFFONIS	6'-7'	BMS	1	
B. <i>SHIBATA VIRIDISSIMA</i> (V. PLANTIFOLIUM 'SHIBATA')	4'-5'	"	3	
C. <i>WICKSTROMIA</i> (R. X 'TRICOLORS PEARL')	6'-8'	"	2	
D. <i>COMAROSTAPHYLE</i> (L. FERN)	4'-5'	"	1	3 TRUNK
E. <i>PALEARCTIC WOOD</i> (L. ALBERTINA)	5'-6'	"	1	
F. <i>SPERMATOPHYTES</i> (E. CAMPAULOIDES)	3'-3 1/2'	"	1	
G. <i>GASTRORHIZA</i> (J. VIRGINICA 'GASTRORHIZA')	1" S. CRK. CONT.		12	
H. <i>SPERMATOPHYTES</i> (V. PLANTIFOLIUM)	4'-5'	BMS	2	3 TRUNK

PLANTING NOTES

- The contractor shall supply all plants in quantities sufficient to complete the work shown on plan. Any discrepancies between quantities shown on plant list and those required by this drawing shall not entitle contractor to additional remuneration.
- Any plant substitutions must be approved by the owner.
- Any tree or shrub which comes over or under any utility shall be relocated on the site by the landscape architect.
- All lawn areas to have 6" of topsoil unless noted otherwise.
- All trees and shrubs shall be placed in the designated areas as shown on the plan and before planting shall be approved by the landscape architect.
- The contractor shall relocate any tree or shrub as directed by the landscape architect.
- All plant material installed shall meet the specifications of the American Standard for Nursery Stock (latest edition) as set forth by the American Association of Nurserymen.
- The landscape contractor shall replace or repair to original condition any and all utilities, paving, curbing, etc., damaged as a result of their operations at no additional cost to the owner.

NOTES:

1. TREE SHALL BEAR SAME RELATION TO GRADE AS PRIOR TO PLANTING.
2. NEVER CUT A LEADER, THIN BRANCHES & FOLIAGE BY 1/3 RETAINING NORMAL TREE SHAPE

NOTE 3:


SECURE GUY'S W/ RUBBER HOSE & #12 GAL. WIRE SIM. TO STAKING NOTE 3:
2" GALV. TURNBUCKLE (3 GUY'S/TREE)

NOTE 4:

FOR ALL TREES UP TO 2 1/2" CAL. USE 2" CP 1/2" STAKES W/ #12 GAL. WIRE ENCASED IN 2 PLY RUBBER. RUBBER HOSE 1/2" INSIDE DIA. GUY ALL EVERGREEN TREES.
#12 GAL. ANNEALED GALV. WIRE IN RUBBER HOSE (SEE NOTE 4)
WOOD STAKES - DARK WALNUT OIL STAIN - ONE COAT, 3 STAKES/TREE
APPROVED TREE WRAP. LAP ENDS DO NOT STAPLE. WRAP TO HT. OF 2ND BRANCH
3" SHREDED BARK MULCH (EXCEPT AS NOTED)
REMOVE BURLAP FROM TOP 1/3RD OF BALL
6" TEMP. SAUCER
SOIL MIX NOTES
FOR DECIDUOUS TREES USE 4 PARTS TOPSOIL, 1 PART MANURE
FOR EVERGREEN TREES USE 4 PARTS TOPSOIL, 1 PART PEAT HUMUS
4" MOUND FOR DRAINAGE

CLAMP FOR GUY REMOVAL
TO METAL DEADMAN ANCHORS DRIVEN INTO SUBGRADE

2X BALL DIA.

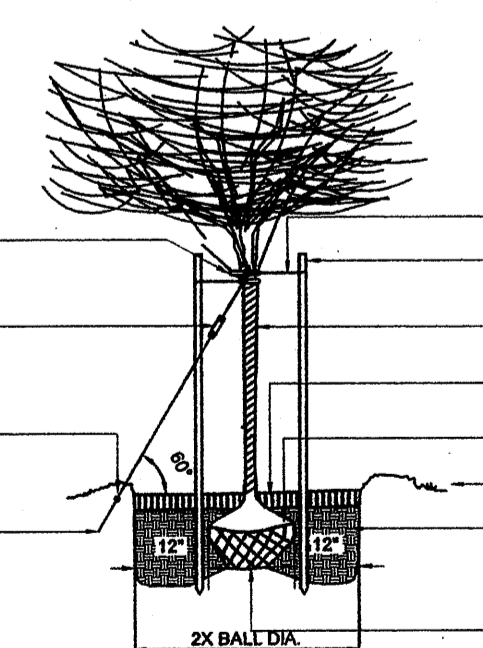


PLANTING DETAIL - TREE

2

N.T.S.

SITE PLAN 1" = 20' - 0"

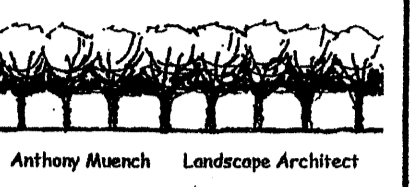

Anthony March Landscape Architect
91 Commercial Street Portland Maine 04101 207.761.0111

DLL ASSOCIATES / ARCHITECTS
188 MAIN STREET, SUITE C
LEWISTON, MAINE 04240

HUTCHINS FUNERAL HOME
660 BRIGHTON AVENUE
PORTLAND, MAINE

PROPOSED NEW LANDSCAPE
PLANTING SITE PLAN

L-2