


**COLUMN STRAPPING SCHEDULE**

- A** (2) 2x4 SPF #2 THIS HALF    **B** (2) 2x4 SPF #2 EACH HALF
- C** (3) 2x4 SPF #2 THIS HALF    **D** (3) 2x4 SPF #2 EACH HALF
- E** (4) 2x4 SPF #2 THIS HALF    **F** (4) 2x4 SPF #2 EACH HALF
- G** (3) 2x6 SPF #2 THIS HALF    **H** (3) 2x6 SPF #2 EACH HALF

- \* ADD RIDGE BEAM BEARING STIFFENER
- \* STRUCTURAL HEADER ABOVE OPENING PER APPROVED PACKAGE

- NOTES:**
- ALL COLUMN STUDS SHALL BE GLUE/NAILED TOGETHER. PVA GLUE WITH 100% COVERAGE SHALL BE USED.
  - INSTALL TWO STEEL STRAPS AT EACH STUD OF EACH COLUMN.
  - COLUMN STUDS SHALL NOT BE NOTCHED OR BORED.

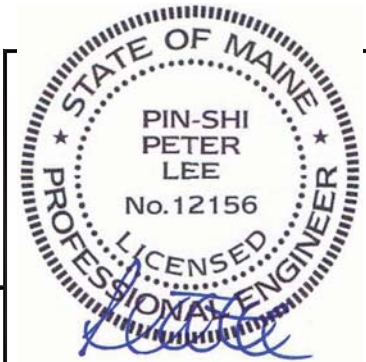

**PETER LEE, P.E. M.S.**  
ENGINEERING INTERNATIONAL, INC.  
ENGINEER: PETER LEE, P.E., M.S.  
CONSULTING ENGINEER  
23329 CENTURY DRIVE  
ELKHART, IN 46514

Nov. 11, 2015



SCHIAVI LEASING  
JENNIFER CURRIER  
103 AIRPORT ROAD  
OXFORD, ME 04270  
PH: (207) 539-8211  
FAX:  
WWW.VANGUARDMODULAR.COM

SERIAL #: 1386 A-B  
OCCUP: E  
DRAWING #: VGM-2015-0027

**FLOOR PLAN**

This document and all information contained herein, are the proprietary data and trade secrets of Vanguard Modular Building Systems (VMBS), and Schiavi Leasing Corporation (Schiavi). This document and the information contained herein may not be reproduced, used, or disclosed in any manner, or to any extent. Written authorization by a current employee of VMBS or Schiavi must be obtained prior to use of this information, in any form, including that which is represented by this complete page.

Drawing Date: 11-10-2015  
Project: PORTLAND, ME  
Drawn By: J.L.B.  
Sheet: **A2**  
Scale: 3/16"=1'-0"  
3 of 6