







**DEMOLITION PLAN NOTES:**

1. DEMOLISH ALL PLUMBING FIXTURES, TOILET PARTITIONS & LOCKERS, EXCEPT WHERE NOTED.
2. DEMOLISH ALL DOORS AND FRAMES, EXCEPT WHERE NOTED (SEE DOOR SCHEDULE). PREP OPENINGS WHERE FRAMES WERE REMOVED FOR INSTALLATION OF NEW FRAMES, DOOR PANELS & HARDWARE.
3. DEMOLISH ALL EXST. RADIATORS.
4. DEMOLISH ALL EXST. WINDOW SILLS.
5. DEMOLISH ALL EXST. FINISH FLOORING. SCRAPE, CLEAN & PREP SUBSTRATE FOR NEW FLOORING.
6. DEMOLISH ALL EXST. ACT CEILINGS & LIGHT FIXTURES.
7. WHERE EXST. CMU WALLS ARE BEING DEMOLISHED, REMOVE CMU UP TO DECK AND BRACE OPENING ABOVE CEILING WITH MTL. STUD FRAMING.
8. CLEAN EXST. WALL SURFACES THAT ARE TO RECEIVE NEW VINYL WALL COVERING.

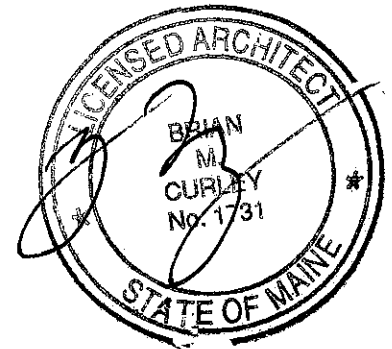

**PLAN KEY**

	EXISTING PARTITION TO REMAIN
	EXISTING PARTITION TO BE DEMOLISHED
	(EXISTING CONSTRUCTION & FIXTURES TO BE DEMOLISHED ARE SHOWN DASHED)
	GENERAL AREA OF SLAB REMOVAL
	NEW PARTITION



**Ecomaine - Renovation of Office/Break Area**  
 64 Blueberry Road, Portland, ME 04102

TITLE  
**DEMOLITION PLAN**

SHEET  
**AD100**

JOB # 12122  
 DATE 05/06/13  
 SCALE As indicated

© 2012 PDT Architects

ARCHITECTURE  
 INTERIOR DESIGN  
 PLANNING  
 49 DARTMOUTH STREET  
 PORTLAND, MAINE 04101  
 www.pdtarch.com

