

# Submittal Data: ASU12RLF



Job Name: \_\_\_\_\_ Location: \_\_\_\_\_

Purchaser: \_\_\_\_\_

Engineer: \_\_\_\_\_

Submitted To: \_\_\_\_\_ For:  Reference  Approval  Construction

Submitted By: \_\_\_\_\_

Unit Designation: \_\_\_\_\_ Schedule No. \_\_\_\_\_ Model No.: \_\_\_\_\_

**Capacities:**

|  |              |
|--|--------------|
| Cooling                                    | 12,000 BTU/h |
| Outdoor Design Temp. <i>F° DB/WB</i>       | 95/75        |
| Heating                                    | 13,500 BTU/h |
| Outdoor Design Temperature <i>F° DB/WB</i> | 47/43        |
| <b>HSPF</b>                                |              |
| Ducted                                     | 9.3          |
| Non-Ducted                                 | 9.8          |
| Mixed                                      | 9.5          |
| <b>SEER</b>                                |              |
| Ducted                                     | 14.7         |
| Non-Ducted                                 | 17.0         |
| Mixed                                      | 15.8         |
| <b>EER <i>Cooling</i></b>                  |              |
| Ducted                                     | 8.7          |
| Non-Ducted                                 | 9.25         |
| Mixed                                      | 8.97         |
| Voltage/Frequency/Phase                    | 208-230/60/1 |


**Indoor Unit:**

|  |             |
|--|-------------|
| Noise Level Cooling <i>db (A) - H/ M/ L/ Q</i> | 40/36/30/25 |
| Noise Level Heating <i>db (A) - H/ M/ L/ Q</i> | 40/36/31/25 |
| Weight   | 18 lbs.     |

**Refrigerant Piping:\***

|                             |         |
|-----------------------------|---------|
| Discharge Vapor Line (O.D.) | 1/4 in. |
| Suction (O.D.)              | 3/8 in. |

**OUTLINE AND DIMENSIONS**

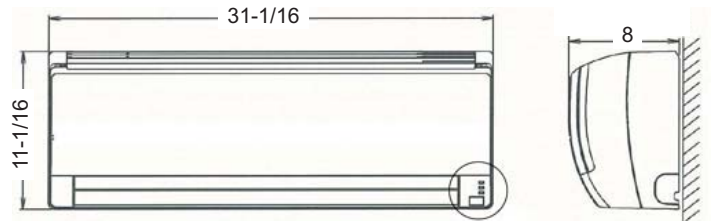

**Standard Features:**

- ◆ Seven year compressor warranty
- ◆ Five year parts warranty
- ◆ Digital wireless remote control
- ◆ Auto Louver: Up/Down
- ◆ Apple Catechin / Ion Deodorizing Filters
- ◆ Sleep Timer
- ◆ Auto Restart/ Reset
- ◆ 24 hour timer
- ◆ Quiet Mode
- ◆ Dry mode
- ◆ Refrigerant R410A

**Notes:**

---

---

---

---

---

---

---

---

---

---

\*Piping lengths vary by outdoor unit. See outdoor unit submittal sheet for detailed specifications.

