

SPECIAL INSTRUCTIONS:

SUB TOTAL:	4,585.50
DISCOUNT:	(419.18)
SALES TAX:	0.00
DELIVERY:	75.00
LABOR:	100.00
TOTAL:	4,341.32
DEPOSIT PAID:	1,085.00
BALANCE DUE:	3,256.32


Customer Acceptance Signature



A Member of the piettac Group

125 Taylor Parkway
Archbold, OH 43502-9309


Ph: (419) 445-8915 or (800) 537-0540
Fax: (419) 445-0367, www.biljax.com

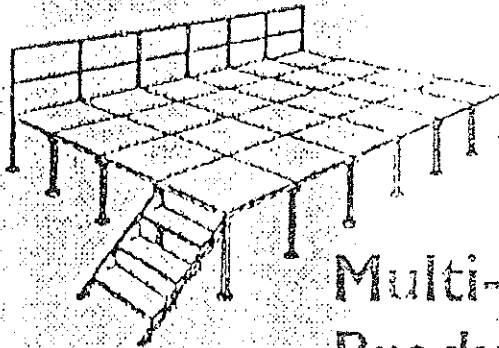

Multi-Stage
Products

Sizes available for the Multi-Stage decks include the popular 4' square section, a 2' x 4' section and a 45° corner section. Standard decks include a 3/4" AC exterior plywood stained in gray enclosed in a steel frame edge protector. Other deck options are available.

**CAPACITY 150 PSF
(732kg per sq. meter)**



2' x 4' Deck Section




Standard on all decks is the original cam lock feature which firmly fastens stage sections together from the top of the stage platform. Cam lock holes are nearly

STAIR OPTIONS

plugged with a cap to fill the surface.

Stage adjustable stair packages come complete with stair step stringers, stair stringer extensions, handrails and aluminum stair planks. These stair packages offer easy access to the stage platform area and can be adjusted to fit various stage heights within the package range.



The new Ultra-Stair decreases set up time and labor. Multiple units are available for platform heights from 24". The units, with detachable handrails, fold flat for storage and ease in shipment.

Package Sizes Available:

12"-18"	Stage Ht. Pkg.
2'-3'	Stage Ht. Pkg.
3'-4'	Stage Ht. Pkg.
4'-6'	Stage Ht. Pkg.

