DOOR AND FRAME SCHEDULE

No.	DOOR SIZE WD	DOOR SIZE HGT	DOOR SIZE THK	DOOR MATL	DOOR GLAZING	DOOR LOUVER WD	DOOR LOUVER HGT	FRAME MATL	FRAME FL	FRAME DETAIL HEAD	FRAME DETAIL JAMB	FRAME DETAIL SILL	FIRE RATING LABEL	HARDWARE SET NO	HARDWARE KEYSIDE RM NO	NOTES
001	3'-0"	7'-0"	2"	WOOD	--	0"	0"	HM	--	4	3	--	1-HOUR	--	--	--
002	PR 2'-6"	7'-0"	1 3/4"	--	--	0"	0"	HM	--	4	3	--	--	--	--	--
003	3'-0"	7'-0"	2"	WOOD	--	0"	0"	HM	--	4	3	--	--	--	--	--
004	3'-0"	7'-0"	2"	WOOD	--	0"	0"	HM	--	4	3	--	--	--	--	--
005	3'-0"	7'-0"	2"	WOOD	--	0"	0"	HM	--	4	3	--	--	--	--	--
006	3'-0"	7'-0"	2"	WOOD	--	0"	0"	HM	--	4	3	--	--	--	--	--
007	3'-0"	7'-0"	2"	WOOD	--	0"	0"	HM	--	4	3	--	--	--	--	--
008	3'-0"	7'-0"	2"	WOOD	--	0"	0"	HM	--	4	3	--	--	--	--	--

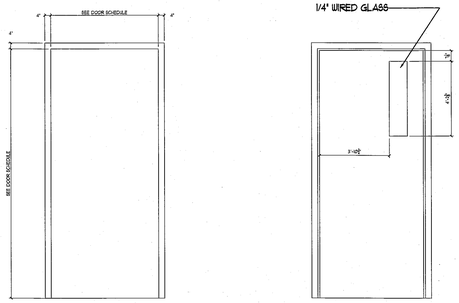

SEATING & SPACE USE PLAN
SCALE: 1/4"=1'-0"

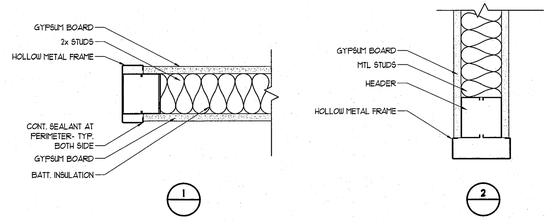

EW — Existing Wall

1. Existing Wall

EWR — Existing Wall to be removed

1. Existing Wall to be removed

W1 — 1 Hour Rated Wall Assembly
Gypsum Board, Wood Studs, Insulation

1. One layer 5/8" Type 'x' gypsum board applied parallel or at right angles to studs. 1-1/4" Types W drywall screws 12" O.C. @
2. Roxul 'Comfort Batts' 5-1/2" thick R=23. (where shown)
3. 2X4 wood studs @ 16" O.C.

W2 — 2 Hour Rated Wall Assembly
Gypsum Board, Wood Studs, Insulation

1. Two layers 5/8" Type 'x' gypsum board applied parallel or at right angles to studs. 1-1/4" Types W drywall screws 12" O.C. @
2. Roxul 'Comfort Batts' 5-1/2" thick R=23. (where shown)
3. 2X4 wood studs @ 16" O.C.

W3 — 1 Hour Wall Assembly 50-54 STC
Gypsum Board, Wood Studs, Resilient Channels, Insulation

1. One layer 5/8" Type 'x' gypsum board applied parallel to resilient channels 1" Types S drywall screws 12" O.C. @ intermediate furring channels and 6" O.C. @ ends.
2. Resilient furring channels applied at right angles to 2x6 wood studs @ 16" O.C. with 6d coated nails, 1-7/8" long, .0085 shank, 1/4" heads, two per joist.
3. Roxul 'Comfort Batts' 5-1/2" thick R=23. (where shown)
4. 2X4 wood studs @ 16" O.C.

W4 — Unrated Wall Assembly
Gypsum Board, Wood Studs, Insulation (where shown)

1. One layer 5/8" Type 'x' gypsum board applied parallel to resilient channels 1" Types S drywall screws 12" O.C. @ intermediate furring channels and 6" O.C. @ ends.
2. 3-1/2" sound insulation batts.
3. 3 1/2" metal studs @ 16" O.C.

W5 — Unrated Wall Assembly
Gypsum Board, Wood Studs, Insulation (where shown)

1. One layer 5/8" Type 'x' gypsum board applied parallel to resilient channels 1" Types S drywall screws 12" O.C. @ intermediate furring channels and 6" O.C. @ ends.
2. Roxul 'Comfort Batts' 5-1/2" thick R=23. (where shown)
3. 2X4 wood studs @ 16" O.C.

STATE OF MAINE
ERIC N. GRONDAHL No. 3328
LICENSED PROFESSIONAL ENGINEER
9-26-13

PROPERTY OF

Ed-de-Tech
235 Riverside Industrial Parkway
Portland, ME 04102

Renovations to space 8
Located at the Pine Tree Mall Portland, Maine
for Bath Fitter

NO	DATE	REMARKS	BY
A	08-09-13	ISSUED FOR PERMITTING	JJO

CODE:
TOWN: Portland
DATE: 08-09-13
SCALE: AS NOTED
DRAWN: JJO
TITLE: Schedules & Details
FILE: 001-016-09
SHEET: A1-03