

Building Address: Pine Tree Plaza: 1060 – 1106 Brighton Ave



Portland Fire Fighter Safety Building Marking System
Reflective white background

Hazard of Contents (left at 9 o'clock):

L- Low hazard; O- Ordinary Hazard; H- High hazard

Construction Type (top at 12 o'clock):

(the least of these types): FR- Fire-resistive; NC- Noncombustible; ORD- Ordinary; HT- Heavy Timber; C- Combustible

Automatic Sprinkler and Standpipe Systems (right at 3 o'clock):


(One or a combination): A- Automatic fire sprinkler throughout; P- Partial fire sprinkler; S- Standpipe; N- None

Occupancy/ Life Safety Issues (bottom at 6 o'clock):

L- Business, industrial, mercantile, residential, and storage occupancies; M- Ambulatory health care, assembly, educational, and day-care occupancies; H- Detention and Corrections, health care, and board and care occupancies.

Special Hazards (Center):

T- Truss or light weight construction; Other; Year at bottom of center

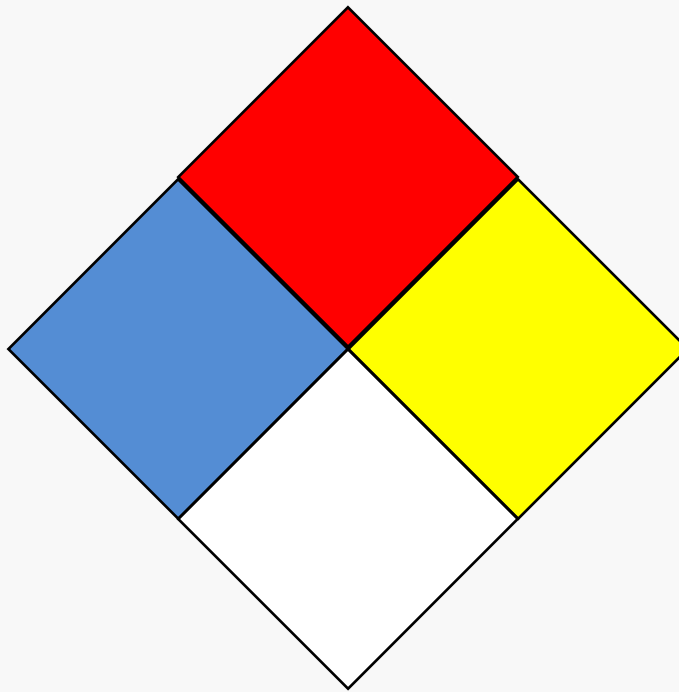

NFPA 704 Signage

NOT required IF not filled in

Left (9 o'clock):	Health Hazards (Blue background)
Top (12 o'clock):	Flammability Hazards (Red background)
Right (3 o'clock):	Instability Hazards (Yellow background)
Bottom (6 o'clock):	Special Hazards (white background)
Under:	Other Special Hazards

Special Notes:

(ie: fire alarm or MSDS sheet location, property management co and em contact phone)

PLAZA FIRE ALARM
AES BOX 4761
FIRE ALARM CONTROL
PANEL OUT BACK

Signs may be purchased from:

Awards & Recognition Inc., 955 Forest Ave (left side of building), Portland, ME 04101.
207-772-8770

Sign to be 8 ½" x 14" vertical if NFPA 704 signage is required, or 8 ½" x 11" vertical if NFPA 704 signage is not required. Signs must be mounted directly above each Knox Box or other approved located at approximately 6 feet above grade.