

# Downspout Filter

PROVEN STORMWATER TREATMENT TECHNOLOGY



## Overview

The Bio Clean Downspout Filter is the industry's leading solution for treatment of roof runoff.

This technology is used to treat commercial and industrial roof tops along with highrise buildings, parking structures and residential buildings.

Available in 3 sizes, this filter can easily adapt to downspouts 2" to 12" in diameter. The filter comes standard with rubber boots that allow for easy installation to the downspout.

Proven since 2003, the Bio Clean Downspout Filter has been used on hundreds of installations throughout the United States. All internal components are constructed of stainless steel.

The sleek inline design allows the filter to be used in tight spaces. Approved by the IAPMO, this filter can meet all your needs.



## Advantages

- 10 Year Warranty
- No Nets or Geofabrics
- Sleek Inline Design
- High Treatment Flow Rate
- High Bypass Flow Rate
- Low Cost

## Performance

- 93% Removal of TSS
- 87% Removal of Hydrocarbons
- Effective at Removing Metals, Nutrients and Bacteria (Media Type)

## Specifications


Model #	Inlet ID (dia., in.)	Filter OD (dia., in.)	Storage Cap. (cu. ft.)	Filtered Flow (gpm)	Bypass Flow (gpm)
BC-DF4	4	6.625	0.9	249	566
BC-DF6	6	8.625	0.21	509	1006
BC-DF8	8	8.625	0.21	509	1006
BC-DF10	10	12.75	0.77	1145	2264
BC-DF12	12	12.75	0.77	1145	2264



# Downspout Filter

PROVEN STORMWATER TREATMENT TECHNOLOGY

## Operation

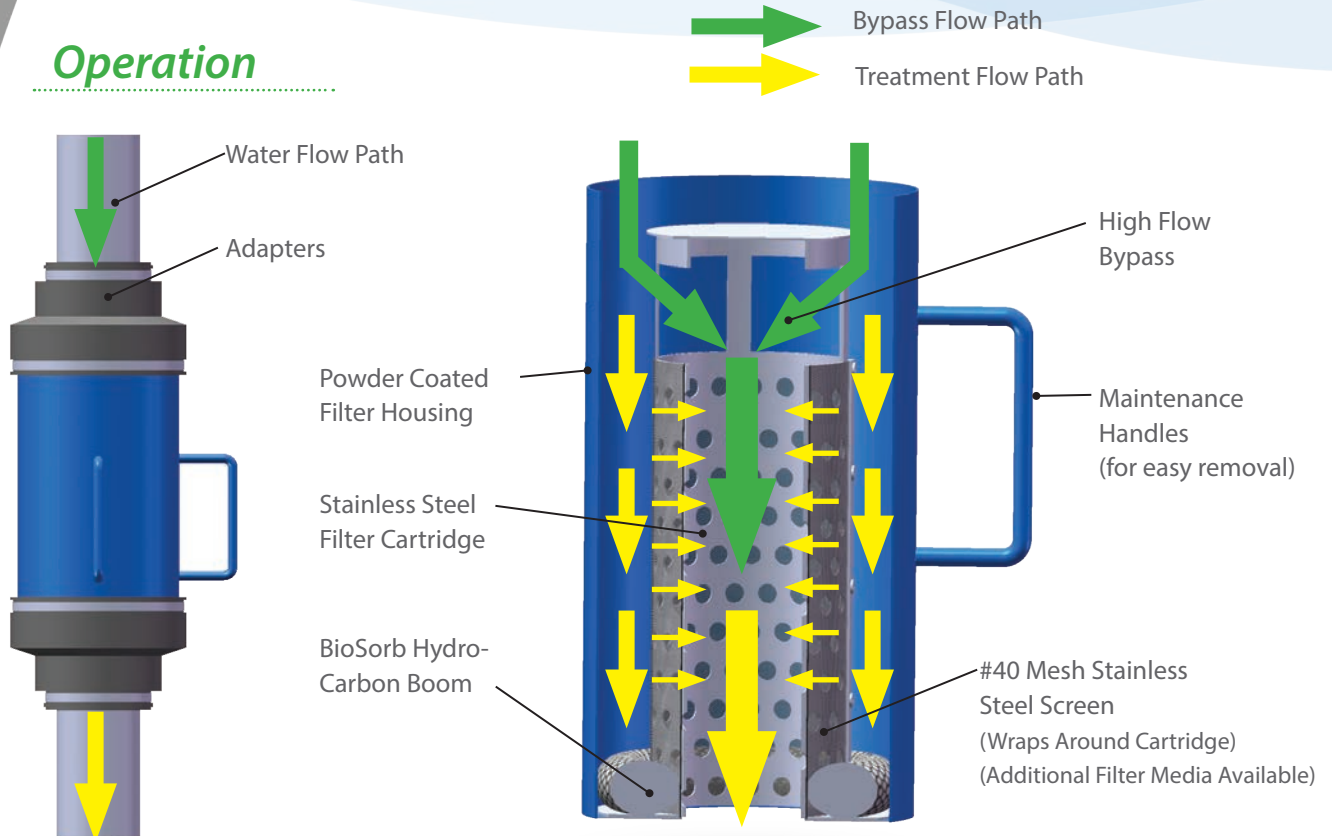

## Application



Easily Adapts to Square or Rectangle Downspouts


- Commercial
- Residential
- Parking Structures
- Mixed Use



Fits Inline with Iron, Steel or Plastic Pipe

## Approvals

IAPMO Testing & Approval Listing



## Installation & Maintenance

See our Website for Installation & Maintenance Manuals at [www.BioCleanEnvironmental.com](http://www.BioCleanEnvironmental.com)

2972 San Luis Rey Rd  
Oceanside, CA 92058  
p 760.433.7640 f 760.433.3176  
[www.BioCleanEnvironmental.com](http://www.BioCleanEnvironmental.com)

