Secondary Part Schedule

Mark	Part	Thick.	Depth	Lap	Detail
G1	08Z2305417D100	0.0600	8 1/2"	10 1/2"	WS12H6,WS12A2,WS01G3
G2	08Z24054171100	0.0600	8 1/2"	10 1/2"	WS01G3
G3	08Z2208417Q100	0.0600	8 1/2"	10 1/2"	WS12H6,WS12A2,WS01G3
H1	DHC0304417	0.0000	8 1/2"		WS21D7
J1	00108JS0702217	0.0600	8 1/2"		WS20B2,WS20B8

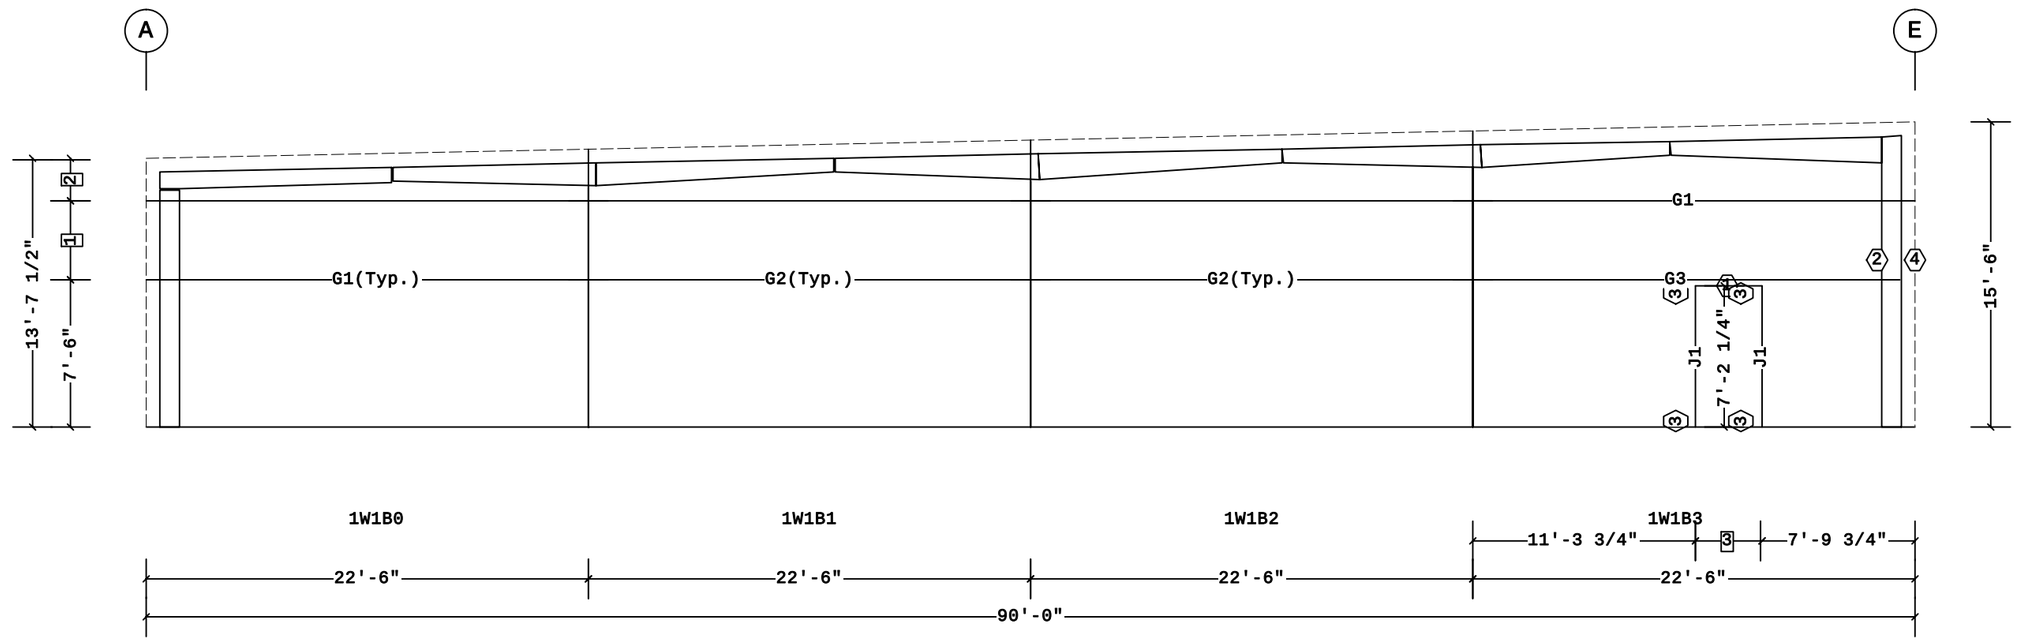

SECONDARY ELEVATION AT 1

BL

BL

3	3'-4 1/2"
2	2'-1 1/2"
1	4'-0"
	Dimension Key

4	GFA106
3	PG1
2	VCC07003090
1	H1
	Part Mark Key

Shape Name = Shipping Addition, Wall = 1

PERMIT SET- For Building Dept. Approval

1. UNLESS NOTED, USE 1/2 X 1 1/2 A325-N BOLT (49080) AND NUT (47120) W/O WASHERS. SNUG TIGHTEN BOLTS FOR ALL SECONDARY CONNECTIONS.
2. FLANGE BRACES ARE AN INTEGRAL PART OF THE STABILITY OF THE STRUCTURAL SYSTEM AND MUST BE PROPERLY INSTALLED PRIOR TO ERECTION OF WALL AND ROOF SHEETS.
3. REMOVAL OR ALTERATION OF ANY COMPONENT IS PROHIBITED.

THE BUTLER MFG. ENGINEER'S SEAL APPLIES ONLY TO THE WORK PRODUCT OF BUTLER MFG. AND DESIGN AND PERFORMANCE REQUIREMENTS SPECIFIED BY BUTLER. THE BUTLER MFG. ENGINEER'S SEAL DOES NOT APPLY TO THE PERFORMANCE OR DESIGN OF ANY OTHER PRODUCT OR COMPONENT FURNISHED BY BUTLER EXCEPT TO ANY DESIGN OR PERFORMANCE REQUIREMENTS SPECIFIED BY BUTLER.

THIS DRAWING, INCLUDING THE INFORMATION HEREON, REMAINS THE PROPERTY OF BUTLER MFG. IT IS PROVIDED SOLELY FOR ERECTING THE BUILDING DESCRIBED IN THE APPLICABLE PURCHASE ORDER AND SHALL NOT BE MODIFIED, REPRODUCED OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR WRITTEN APPROVAL OF BUTLER MFG.

THE GENERAL CONTRACTOR AND/OR ERECTOR IS SOLELY RESPONSIBLE FOR ACCURATE GOOD QUALITY WORKMANSHIP IN ERECTING THIS BUILDING IN ACCORDANCE WITH THIS DRAWING, DETAILS REFERENCED IN THIS DRAWING, ALL APPLICABLE BUTLER MFG. ERECTION GUIDES, AND INDUSTRY STANDARDS PERTAINING TO PROPER ERECTION, INCLUDING THE CORRECT USE OF TEMPORARY BRACING.

BUTLER MANUFACTURING
1540 GENESSEE ST. KANSAS CITY, MO 64102

REV:	DATE:	BY:	DESCRIPTION:

DRAWING SCALE: NTS

SECONDARY ELEVATION AT 1

BUILDER:	Sheridan
CUSTOMER:	Safelite
LOCATION:	Portland, Maine
PROJECT:	Safelite Auto
BUILDER'S PO#:	161003

Butler Manufacturing
VPC VERSION: 2015.2d

JOB #:	16-008746-01
DATE:	4/29/2016
DRAWN/CHECK:	LC /
PAGE:	14