

PROJECT SUMMARY:

THE PROJECT SCOPE INCLUDES THE DESIGN, SPECIFICATION, PROCUREMENT, INSTALLATION AND COMMISSIONING OF A COMPLETE, TURN-KEY, GRID-TIED PHOTOVOLTAIC ELECTRIC SYSTEM.


MODULE TYPE	(8) Q CELL Q.PEAK-G4.1 305
INVERTER	(1) SE3000H-US
OPTIMIZER	(8) SOLAREEDGE P320
ARRAY PITCH	25°
ARRAY AZIMUTH	202°
RACKING	IRONRIDGE XRI00 ALUMINUM RAIL
ATTACHMENT	ALUMINUM L-FEET WITH SS LAG SCREWS, 3 X5/16

DESIGN CRITERIA:

OCCUPANCY	RESIDENTIAL
DESIGN WIND LOAD	100 MPH
RISK CATEGORY	I
GROUND SNOW LOAD	60 PSF
EXPOSURE CATEGORY	C
ROOF HEIGHT	~10' ABOVE GRADE TO EAVES
ROOF COMPOSITION	ASPHALT SHINGLE
RAFTER	
RAFTER SPACING	16" O.C.

EQUIPMENT LOCATIONS:

- EXTERIOR DC DISCONNECT WILL BE LOCATED ON THE NE CORNER OF THE GARAGE
- EXTERIOR AC DISCONNECT WILL BE LOCATED ON THE NORTHERN GABLE OF THE HOME NEXT TO THE UTILITY METER
- THE INVERTER AND TAP DISCONNECT WILL BE LOCATED IN THE BASEMENT OF THE HOME TO THE LEFT OF THE MAIN PANEL

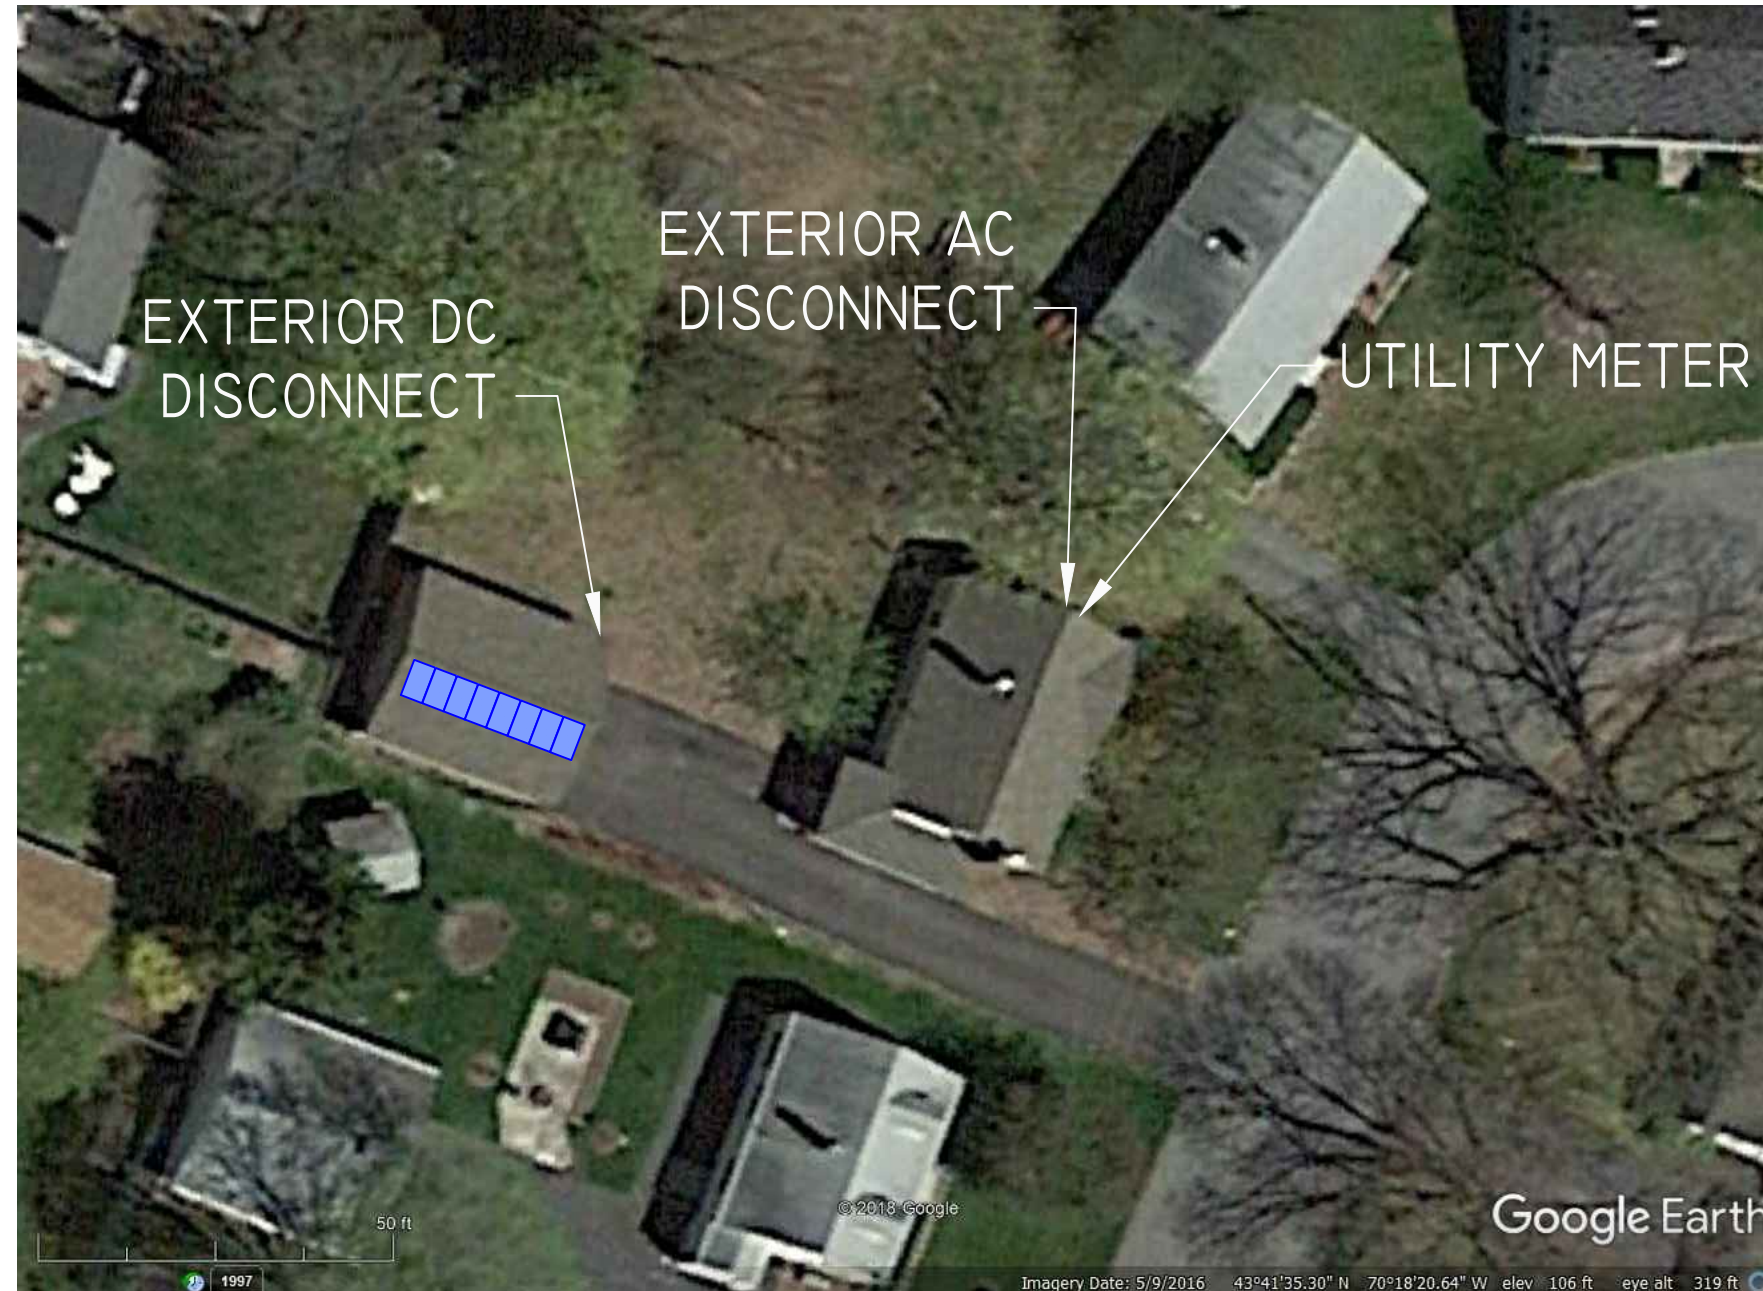

**REVISION
ENERGY**

142 PRESUMSCOT STREET
PORTLAND, ME 04103
(207)-221-6342

CLIENT:

INDU GUPTA
158 DOROTHY STREET
PORTLAND MAINE, 04103

SYSTEM TYPE:

2.44KW GRID TIED SOLAR
PHOTOVOLTAIC SYSTEM

DESIGNED BY: GJD

REVISION: 0

PRINT SIZE: 11" X 17"

DATE: 3/9/2018

DWG TITLE:

SITE PLAN

DWG NUMBER:

A001

© COPYRIGHT REVISION ENERGY

THIS DIAGRAM IS PROVIDED AS A SERVICE AND IS BASED ON THE UNDERSTANDING OF THE INFORMATION SUPPLIED. IT IS SUBJECT TO CHANGE BASED ON ACTUAL CONDITIONS, APPLICABLE EDITION OF THE NATIONAL ELECTRIC CODE, AND LOCAL GOVERNMENTAL AUTHORITIES.