


Cathedral Framing Detail

Lam Documents will be submitted once it is ordered and emailed to Code Enforcement.

Collar Ties will be Installed 18" Below Lam.

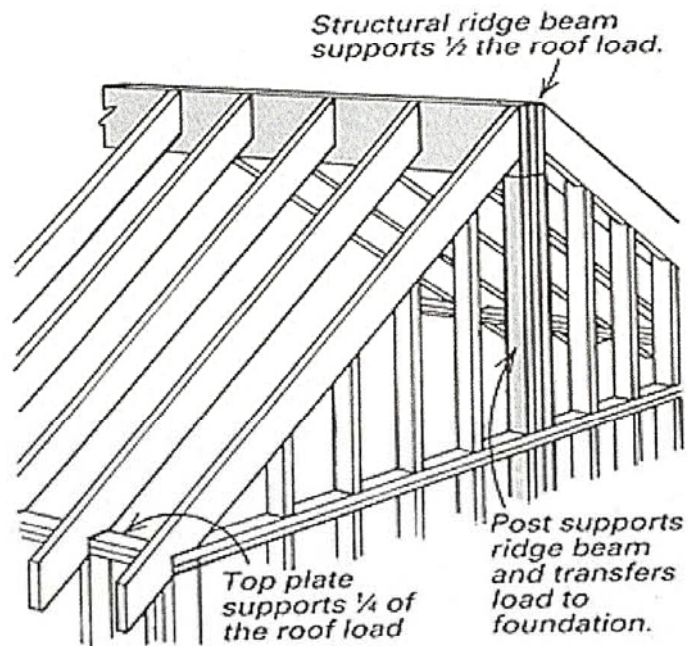


Reviewed by this office

STUDIO A architecture

178 Davis Avenue Auburn, Maine 04210

207-333-3060 smithnoel179@gmail.com

Noel D Smith Maine Architect #817

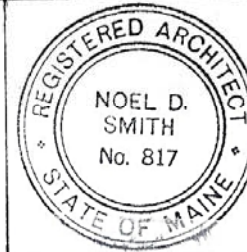

Notes:

1. Structural posts and structural beam at new gable end wall. See Detail
2. All 2 x framing connections to and structural beams and posts to be mechanical; Simpson or equal by Hillman or USP.