


ARCHITECT:
SEMPLE & DRANE ARCHITECTS
 496 CONGRESS STREET
 PORTLAND, MAINE 04101
 TEL: (207) 781-4231 FAX: 774-0152
 SDA@sempledrane.com
 WWW.SEMPLEDRANE.COM

ENGINEERING:
Englebert
 160 Veranda Street
 Portland, Maine 04103
 TEL: 781-238-5800
 WWW.ENGLEBERT-ENG.COM

STATE OF MAINE
 PROFESSIONAL ENGINEER
 FAUCHER
 W752
 CATHERINE

ELECTRICAL DEMOLITION NOTES
 E9

- REFER TO FLOOR PLANS FOR SCOPE OF WORK AREA. DEMOLITION SCOPE SHALL INCLUDE ALL ELECTRICAL DEVICES IN WALLS SCHEDULED TO BE DEMOLISHED.
- DEMOLITION SHALL INCLUDE, BUT NOT BE LIMITED TO, WIRING DEVICES, OUTLET BOXES, PULL BOXES, LIGHTING FIXTURES AND SWITCHES, WIRING AND CONDUIT, FIRE ALARM DEVICES, ETC.
- DEMOLITION SHALL EXCLUDE ALL DEVICES AND WIRING FOR EQUIPMENT INDICATED TO REMAIN.
- REMOVE ALL ELECTRICAL WIRING FOR EQUIPMENT TO BE REMOVED BACK TO THE POINT OF CONNECTION.
- PROVIDE WIRING AND CONNECTIONS AS REQUIRED TO MAINTAIN POWER TO ITEMS TO REMAIN.
- CONTRACTOR SHALL VERIFY ALL EXISTING SOURCES OF POWER TO EQUIPMENT PRIOR TO FINAL REMOVAL.
- THE CONTRACTOR SHALL COORDINATE ALL SHUTDOWN PROCEDURES WITH THE OWNER PRIOR TO DISCONNECTING ANY CIRCUITS.
- PROVIDE BLANK COVER PLATES FOR REMOVED POWER AND COMMUNICATIONS OUTLETS IN EXISTING WALLS SCHEDULED TO REMAIN.
- REFER TO NEW CONDITIONS PLANS FOR NEW LOCATIONS OF EXISTING ITEMS TO BE RELOCATED.
- PROTECT EXISTING BRANCH CIRCUIT WIRING, FEEDERS, COMMUNICATIONS WIRING, ETC. LOCATED WITHIN AREAS OF RENOVATIONS BUT SUPPLYING ITEMS LOCATED IN OTHER AREAS.
- LIGHTING FIXTURES SHALL GENERALLY BE TURNED OVER TO THE OWNER. WHEN SUCH ARE INDICATED ON NOTED TO BE RELOCATED OR REPAIRS TO BE MADE, THE CONTRACTOR SHALL BE RESPONSIBLE FOR PARTS TO REPAIR FIXTURES DAMAGED DURING CONSTRUCTION.
- VERIFY ALL EXISTING SOURCES OF POWER TO EQUIPMENT PRIOR TO FINAL REMOVAL.
- COORDINATE ALL SHUTDOWN PROCEDURES WITH THE OWNER PRIOR TO DISCONNECTING ANY CIRCUITS.
- PROVIDE BLANK COVER PLATES FOR REMOVED POWER AND COMMUNICATIONS OUTLETS IN EXISTING WALLS SCHEDULED TO REMAIN.
- UNDER ALTERNATE #5 A NEW SPRINKLER SYSTEM WILL BE INSTALLED THROUGHOUT UNDER OTHER DIVISIONS. ALL EXISTING ACQUASTICAL CEILING SHALL BE REMOVED AND REINSTALLED UNDER OTHER DIVISIONS IN ORDER TO FACILITATE SPRINKLER SYSTEM INSTALLATION.
- PROTECT AND SUPPORT FROM STRUCTURE ALL EXISTING CEILING MOUNTED DEVICES INCLUDING, BUT NOT LIMITED TO, FIRE ALARMS, SMOKE DETECTORS, SPEAKERS, FIRE ALARM DEVICES, AND THEIR ASSOCIATED WIRING TO FACILITATE CEILING SYSTEM REMOVAL. REINSTALL ALL EXISTING CEILING MOUNTED ITEMS IN NEW ACQUASTICAL CEILINGS.
- EXISTING BRANCH CIRCUIT, DATA/TELECOMMUNICATIONS, AND SYSTEMS CABLES LOCATED ABOVE EXISTING ACQUASTICAL CEILING SHALL BE SUPPORTED FROM STRUCTURE USING LISTED MEANS AND IN ACCORDANCE WITH CURRENT NEC REQUIREMENTS.
- NO CONDUIT OR WIRING THAT BECOMES UNUSED AS A RESULT OF THIS PROJECT SHALL BE ABANDONED IN PLACE.

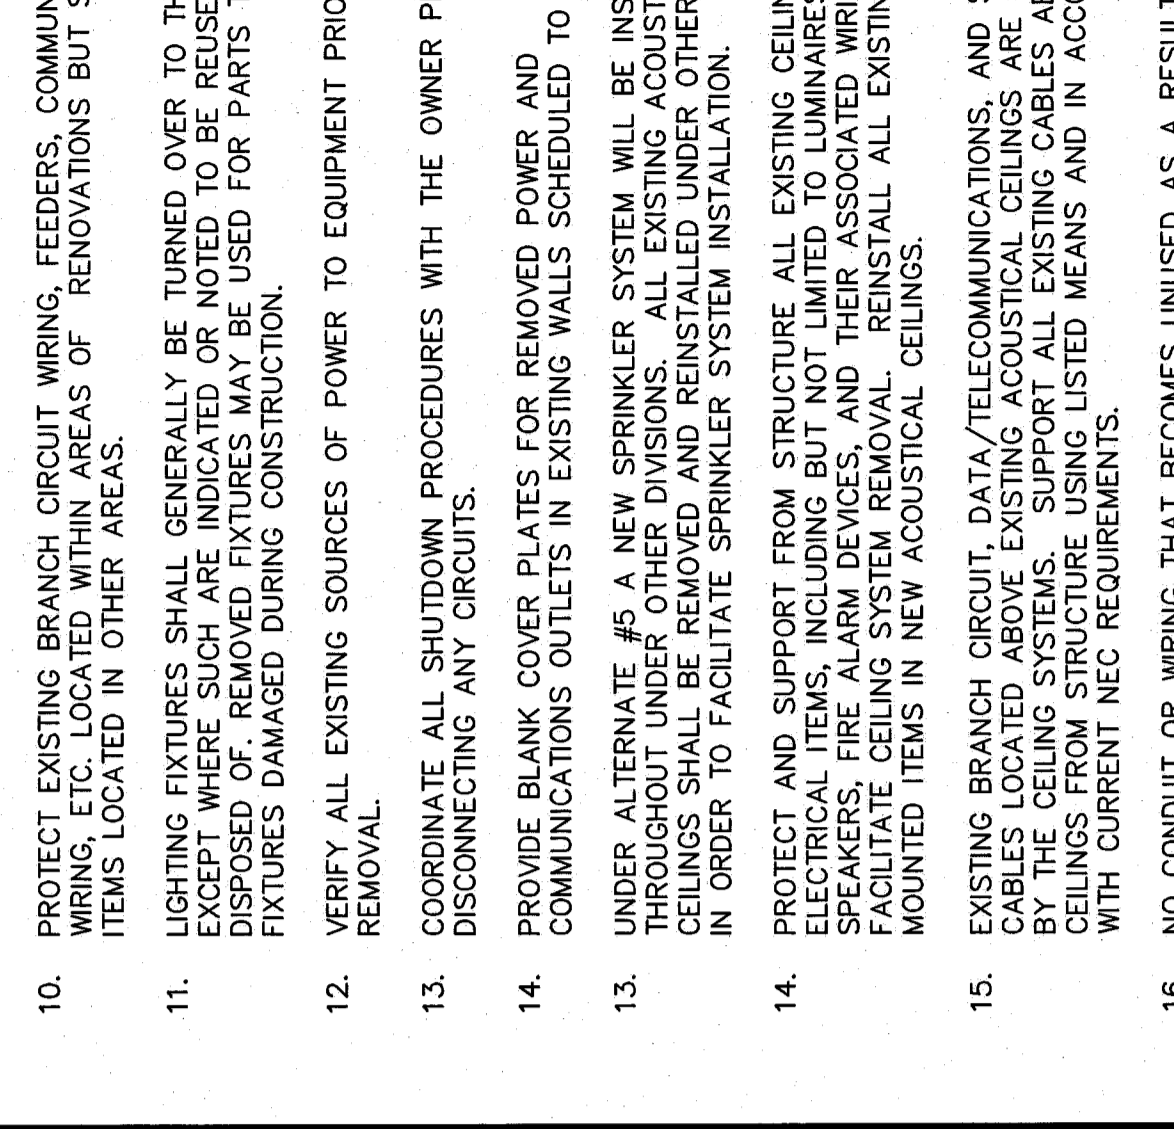

KEY PLAN
NO SCALE

