## COLUMN SCHEDULE

| COLUMN MARK | A–1.3 | A–2 | A–3 | B–1 | B–1.2 | B–2 | B–3 | B.5–1 | B.5–1.2 | B.5–2 | B.5–2.5 | B.5–3 | C–1 | C–1.2 | C–2 | C–3 | D–1 | D–1.2 | D–2 | D–2.3 | D–3 | D.1–2 | D.1–2.5 | D.1–2.8 | D.1–3 | D.2–1 | D.2–1.2 | E–1.3 | E–2 | E–2.5 | E–2.8 | E–3 | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| PENTHOUSE ROOF | | | | | | | | | | | HSS4x4x1/4 | | | | | | | | HSS4x4x1/4 | | | | HSS4x4x1/4 | HSS4x4x1/4 | HSS4x4x1/4 | | | | | | | | |
| ROOF | HSS5x5x1/4 | HSS6x6x3/8 | HSS6x6x3/8 | HSS5x5x1/4 | | HSS6x6x1/2 | HSS6x6x1/2 | HSS5x5x1/4 | | HSS6x6x3/8 | | HSS6x6x3/8 | HSS5x5x1/4 | | HSS6x6x1/2 | HSS6x6x1/2 | HSS5x5x1/4 | | | HSS6x6x1/2 | HSS6x6x3/8 | HSS6x6x1/2 | | | | HSS5x5x1/4 | | HSS5x5x1/4 | HSS5x5x1/4 | HSS5x5x1/4 | HSS5x5x1/4 | HSS5x5x1/4 |
| SECOND FLOOR | | | | | | | | | | | | | | | | | | | | | | | HSS4x4x1/4 | | | | | | | | | | |
| MEZZANINE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FIRST FLOOR | | | | | HSS5x5x1/4 | | | | HSS5x5x1/4 | | | | | HSS5x5x1/4 | | | | HSS5x5x1/4 | | | | | | | | HSS5x5x1/4 | | | | | | | |
| GARDEN FLOOR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BASEMENT | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BOT OF BASE PL ELEVATION U.N.O. | (72'-8") * | (72'-8 1/2") * | (72'-3 1/2") * | | (73'-1") | (64'-10 1/2") | (72'-3") * | | (73'-1") | (64'-10") | | (72'-3 1/2") * | | (73'-1") | (64'-10") | (72'-3") * | | (73'-1") | | (64'-10 1/2") | (72'-3 1/2") * | (64'-10") | | | | | (73'-1") | (71'-7") | (71'-7 1/2") | (71'-1") * | (71'-1") * | (72'-3") * | |
| BASE PL TYPE SHEAR LUG (S.L.) | B | D S.L. | E S.L. | | B | F S.L. | D | | A | F | | D S.L. | | A | F | D | | A | | F S.L. | D S.L. | F | | | | | B | A | C S.L. | C | C | A | |

NOTE: BEAMS, COLUMNS AND BRACING MEMBERS TO BE FIREPROOFED. SEE ARCHITECTURAL FOR ADDITIONAL INFO.

* INDICATES DIMENSION BASED ON EXIST FLOOR/EXIST FOOTING ELEVATION

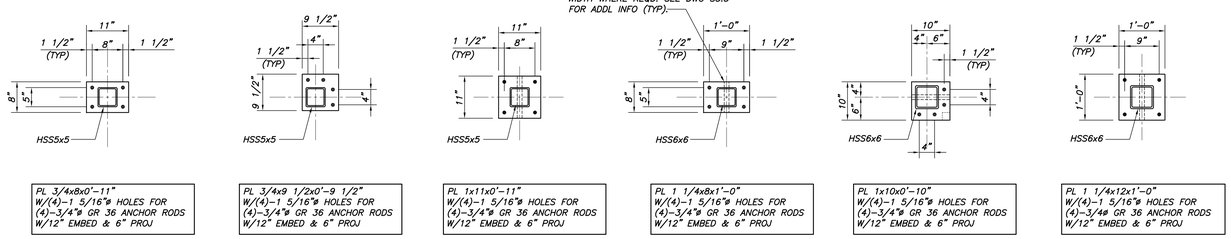


PL 3/4x8x0'-11" W/(4)-1 5/16"ø HOLES FOR (4)-3/4"ø GR 36 ANCHOR RODS W/12" EMBED & 6" PROJ

TYPE A

PL 3/4x9 1/2x0'-9 1/2" W/(4)-1 5/16"ø HOLES FOR (4)-3/4"ø GR 36 ANCHOR RODS W/12" EMBED & 6" PROJ

TYPE B

PL 1x11x0'-11" W/(4)-1 5/16"ø HOLES FOR (4)-3/4"ø GR 36 ANCHOR RODS W/12" EMBED & 6" PROJ

TYPE C

PL 1 1/4x8x1'-0" W/(4)-1 5/16"ø HOLES FOR (4)-3/4"ø GR 36 ANCHOR RODS W/12" EMBED & 6" PROJ

TYPE D

PL 1x10x0'-10" W/(4)-1 5/16"ø HOLES FOR (4)-3/4"ø GR 36 ANCHOR RODS W/12" EMBED & 6" PROJ

TYPE E

PL 1 1/4x12x1'-0" W/(4)-1 5/16"ø HOLES FOR (4)-3/4ø GR 36 ANCHOR RODS W/12" EMBED & 6" PROJ

TYPE F

## BASE PLATE DETAILS

N.T.S.

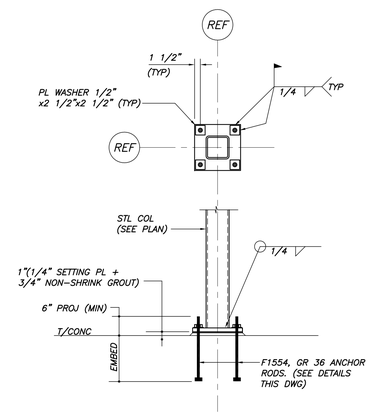


## TYP COL BASE DETAIL U.N.O.

N.T.S.


CONSULTANTS

BECKER STRUCTURAL ENGINEERS, INC.
75 YORK STREET PORTLAND, MAINE
207-879-1838
207-879-1822

SCHWARTZ / SILVER ARCHITECTS INC.
75 Kneeland Street Boston, Massachusetts 02111
Telephone 617.542.2650
Facsimile 617.951.0770


PROJECT
MAINE HISTORICAL SOCIETY
489 CONGRESS ST.
PORTLAND, MAINE

| DATE | REVISIONS | |
|---|---|---|
| 05.01.07 | 60% CD SET | |
| 07.06.07 | 100% CD REVIEW SET | |
| 07.16.07 | 100% CD SET | |

| | | |
|---|---|---|
| SEP 2006 | A.P.P. | |
| Date | Drawn By | |
| SEP 2006 | E.A.R. | |
| Date | Reviewed By | |
| SEP 2006 | D.S.B. | |
| Date | Approved By | |
| Date | Number | Description |

DRAWING TITLE
COLUMN SCHEDULE

NOTED
Scale

DRAWING NUMBER
S1.9