

Location of Construction: 260 Riverside St		Owner: Pro Lube		Phone:		Permit No: 970970	
Owner Address:		Lessee/Buyer's Name: Jiffy Lube		Phone:		BusinessName:	
Contractor Name: Sign Design, Inc.		Address: 743 Broadway So. Ptld, ME		Phone: 04106 799-2000		Permit Issued: SEP 12 1997 CITY OF PORTLAND	
Past Use: Auto Service		Proposed Use: Same		COST OF WORK: \$		PERMIT FEE: \$ 44.40	
				FIRE DEPT. <input type="checkbox"/> Approved <input type="checkbox"/> Denied		INSPECTION: Use Group: Type:	
				Signature:		Signature:	
Proposed Project Description: Erect Sign				PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Action: <input type="checkbox"/> Approved <input type="checkbox"/> Approved with Conditions <input type="checkbox"/> Denied		Zoning Approval: 9/11/97 Special Zone or Reviews: <input type="checkbox"/> Shoreland MAX 25' height <input type="checkbox"/> Wetland on pole sign <input type="checkbox"/> Flood Zone <input type="checkbox"/> Subdivision <input type="checkbox"/> Site Plan maj <input type="checkbox"/> minor <input type="checkbox"/> mm <input type="checkbox"/>	
Permit Taken By: Mary Gresik		Date Applied For: 27 August 1997				Zone: 4 CBL: 316-B-006	

1. This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules.
2. Building permits do not include plumbing, septic or electrical work.
3. Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work..

**Zoning Appeal**

Variance  
 Miscellaneous  
 Conditional Use  
 Interpretation  
 Approved  
 Denied

**Historic Preservation**

Not in District or Landmark  
 Does Not Require Review  
 Requires Review

**Action:**

Approved  
 Approved with Conditions  
 Denied

Date: 9/20/97

MA

**CERTIFICATION**

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit

SIGNATURE OF APPLICANT: *[Signature]* ADDRESS: 743 Broadway So. Portland DATE: 27 August 1997 PHONE: 799-2000


RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE: SALES

CEO DISTRICT: 4

A. Powers

COMMENTS

# 23-48  
Signage installed per submitted.

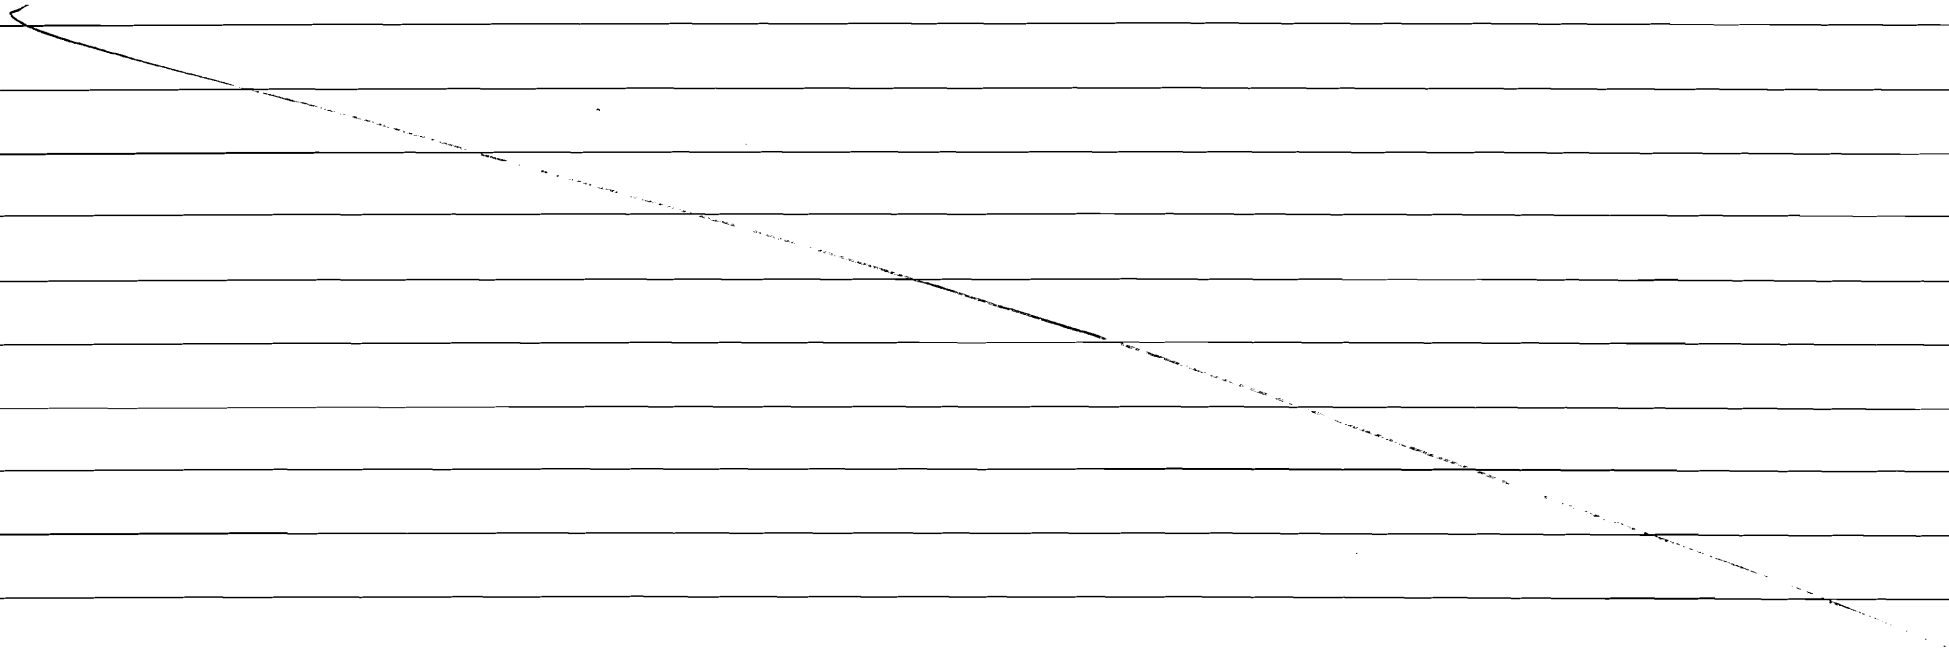

	Type	Inspection Record	Date
Foundation:	_____	_____	_____
Framing:	_____	_____	_____
Plumbing:	_____	_____	_____
Final:	_____	_____	_____
Other:	_____	_____	_____

SIGNAGE

PLEASE ANSWER ALL QUESTIONS

Address: 260 RIVERSIDE ST. zone: B-4

Owner: PRO LUBE INC. Assessors #: \_\_\_\_\_

Applicant: SIGN DESIGN INC. / PRO LUBE INC

Single Tenant Lot?: Yes  No

Multi Tenant Lot?: Yes  No

Freestanding (Ext pole sign)? Yes  No  Dimensions see design # 6178 (not 65 # MAX)

More than (1) one sign?: Yes  No  Dimensions \_\_\_\_\_

Bldg Wall Sign (att to bldg)? Yes  No  Dimensions 35, 25 # per spec sheets

List all existing signage and their dimensions:

NONE

Lot Frontage(feet): 60' Tenant Frontage(feet): 60' x 2'

AWNINGS

Awning?: Yes  No  Is Awning Backlit?: Yes  No

Is there any communication, message, trademark or symbol on awning? \_\_\_\_\_

Height of Awning?: \_\_\_\_\_

PLEASE NOTE: Approvals for signs on the Public Sidewalk and temporary signs come under different requirements and regulations.

ALSO: See reverse side for additional information, requirements and materials needed for signage application submittal.

*Shows 4025 tall*  
*see design # 6178*  
*(not 65 # MAX)*  
*35, 25 # per spec sheets*  
*OK*

*120 #*  
*MAX*

# SPECIFICATIONS

MOUNTED UPRIGHT TO 25' OVERALL HEIGHT.

## 8' SHAPED LOGO SIGN

Double faced, illuminated primary roadside sign normally mounted on 3'x8' readerboard.

- DIMENSIONS:** 8'6" x 8'3" (squared)  
**SQUARE FOOTAGE:** 32.8 (sign area only)  
61.78 (sign area with readerboard)  
**FACES:** .150" SG-100 Polycarbonate left and right pan faces with 5/8" embossed graphics  
**DECORATION:** Screened, Flame Red (FR-1-585) and White (FR-1-110)  
**CABINET:** Extruded aluminum 10" wide with 1" face retainer, primed and painted semi-gloss mahogany brown. Remove screws from retainer and lift out face for service.  
**ELECTRICAL:** 6.0 total AMPS, 1-15 AMP circuit, 120V with 2 #12 lead wires  
**INSTALLATION:** Center pole mount with 1" x 3/2" bolts

## 3' x 8' READERBOARD

Double faced, illuminated, with four lines of track. For use with 8' shaped logo primary roadside sign.

- DIMENSIONS:** 3'7" x 8'1 1/16"  
**SQUARE FOOTAGE:** 28.98 (readerboard area only)  
**FACES:** .125" SG-100 Polycarbonate pan faces with four lines of zip track  
**DECORATION:** Screened, white only (FR-1-110)  
**CABINET:** Extruded aluminum 10" wide, primed and painted semi-gloss mahogany brown. One side hinged for service.  
**ELECTRICAL:** 3.0 total AMPS, 1-15 AMP circuit  
**INSTALLATION:** Center pole mount

## 6' SHAPED LOGO SIGN

Double faced, illuminated roadside sign, normally mounted on 3' x 6' readerboard.

- DIMENSIONS:** 6'7" x 6'5 1/8" (squared)  
**SQUARE FOOTAGE:** 18.9 (sign area only)  
40.72 (sign area with readerboard)  
**FACES:** .125" SG-100 Polycarbonate left and right pan faces with 5/8" embossed graphics  
**DECORATION:** Screened, Flame Red (FR-1-585) and White (FR-1-110)  
**CABINET:** Extruded aluminum 8" wide with 1" face retainer, primed and painted semi-gloss mahogany brown. Remove screws from retainer and lift face for service.  
**ELECTRICAL:** 3.0 total AMPS, 1-15 AMP circuit, 120V with 2 #12 lead wires  
**INSTALLATION:** Center pole mount with 1" x 3 1/2" bolts

## 3' x 6' READERBOARD

Double faced, illuminated with four lines of track. For use with 6' shaped logo roadside sign.

- DIMENSIONS:** 3'7" x 6'1 1/16"  
**SQUARE FOOTAGE:** 21.82  
**FACES:** .125" SG-100 Polycarbonate pan faces with four lines of zip track  
**DECORATION:** Screened, white only  
**CABINET:** Extruded aluminum 10" wide, primed and painted semi-gloss mahogany brown. One side hinged for service.  
**ELECTRICAL:** 2.2 total AMPS, 1-15 AMP circuit  
**INSTALLATION:** Center pole mount

# SPECIFICATIONS

\* USING "I" OF THESE ON CORB CUT AT RIVERSIDE ST

## **1'6" x 3' DIRECTIONAL SIGNS**

Illuminated, double faced roadside signs available in three versions:

1. **ENTER on each side;**
2. **EXIT on each side;**
3. **ENTER on one side and EXIT on the other.**

**DIMENSIONS:** 1'6" x 3'1"

**SQUARE FOOTAGE:** 4.62

**FACES:** .100" SG-100 Polycarbonate pan faces with screened graphics

**DECORATION:** Screened, Flame Red (FR-1-585) and White (FR-1-110)

**CABINET:** Extruded aluminum, primed and painted

**ELECTRICAL:** 1.60 total AMPS, 1-15 AMP circuit, 120V with 2 #12 lead wires

**INSTALLATION:** Center pole mount

Non-illuminated versions are available by special order.

---

***HERITAGE MERCHANDISING***  
***has illuminated and non-illuminated***  
***directional signs.***

# ROADSIDE IDENTIFICATION

8' Shaped Logo Sign with 3'7" x 8' Readerboard  
AND

6' Shaped Logo Sign with 3'7" x 6' Readerboard




~~3x8~~  
 $3 \times 4 = 12$   
 $1 \times 4 = 4$   
 $2 \times 4 = 8$

$3.5 \times 8 = 28 \text{ ft}$

shows on spec  
6.70 ft  
↓  
28  
56 ft

# DIRECTIONAL SIGNS

1'6" x 3' Directional Sign

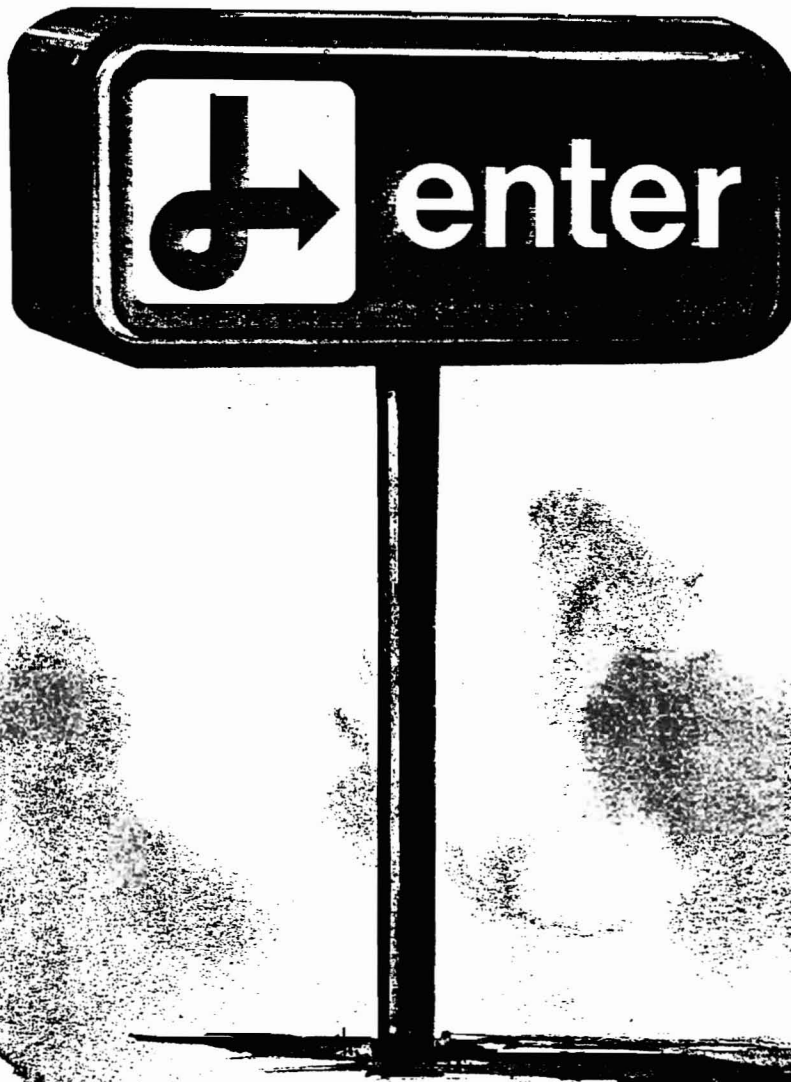

# SPECIFICATIONS

*NOT USING NEON, ~~FLUORESCENT TUBES INSIDE.~~  
NON-ILLUMINATED*

## BUILDING LETTERS/FIXED COPY SIGN

Illuminated/neon letters mounted on a raceway that is also an illuminated panel sign. This unique sign is available in four versions:

- ~~1. Red neon letters trimmed in white, with a white raceway panel with slogan, "America's Favorite Oil Change," encased in mahogany brown cabinet.~~
- ~~2. As above except with a white raceway panel with slogan, "14 Point Oil Filter Fluid Service." (Optional by special order.) Encased in mahogany brown cabinet.~~
- ~~3. White neon letters with a white raceway panel with slogan, "America's Favorite Oil Change," in red. (Optional by special order.)~~
- ~~4. As in 3 above except with a white raceway panel with slogan, "14 Point Oil Filter Fluid Service," in red. (Optional by special order.)~~

<del>DIMENSIONS:</del>	3'x11'9"
<del>SQUARE FOOTAGE:</del>	35.25 (squared) 28.2 (sign area only)
<del>FACES:</del>	.187" white pigmented acrylic letters with red translucent film raceway panel .187" white pigmented acrylic fixed copy strip with mahogany brown screened copy. Red letter faces trimmed with white edge molding.
<del>CABINET:</del>	.050" aluminum sides with .063" aluminum backs, primed and painted mahogany brown. Remove letter faces for access.
<del>ELECTRICAL:</del>	14 total AMPS, 1-20 AMP circuit, 120V with 2 #12 lead wires per section (Jiffy and Lube are separate sections)
<del>INSTALLATION:</del>	1 1/2" x 3/16" mounting bars with 8/8" diameter mounting bolts

*INDIVIDUAL LETTERS*

## ~~6' WALL MOUNT LOGO SIGN~~

~~Single faced, illuminated wall sign in standard and reverse logo versions, ideal for mounting on either side or both sides of the building.~~

<del>DIMENSIONS:</del>	<del>67" x 6'5 1/8"</del>
<del>SQUARE FOOTAGE:</del>	<del>18.9 (sign area only)</del>
<del>FACES:</del>	<del>.125" SG-100 Polycarbonate pan face with 5/8" embossed graphics</del>
<del>DECORATION:</del>	<del>Screened, Flame Red (FR-1-585) and White (FR-1-110)</del>
<del>CABINET:</del>	<del>Extruded aluminum 8" wide with 1" face retainer, primed and painted mahogany. Remove screws from retainer for service.</del>
<del>ELECTRICAL:</del>	<del>3.0 total AMPS, 1-15 AMP circuit, 120V with 2 #12 lead wires</del>
<del>INSTALLATION:</del>	<del>Wall mount with 3/8" diameter bolts</del>

## ~~3'7" x 8' WALL MOUNT READERBOARD~~

~~Single faced, illuminated with four lines of track. Typical installation is on the arrow point side of the 6' wall mount logo sign.~~

<del>DIMENSIONS:</del>	<del>37" x 8'1 1/8"</del>
<del>SQUARE FOOTAGE:</del>	<del>28.98</del>
<del>FACES:</del>	<del>.125" SG-100 Polycarbonate pan face with four lines of zip track</del>
<del>DECORATION:</del>	<del>Screened, white only (FR-1-110)</del>
<del>CABINET:</del>	<del>Extruded aluminum 10" wide, primed and painted mahogany. Face hinged for service.</del>
<del>ELECTRICAL:</del>	<del>3.0 total AMPS, 1-15 AMP circuit</del>
<del>INSTALLATION:</del>	<del>Wall mount with 3/8" diameter bolts</del>



# jiffylube

America's Favorite Oil Change

BUILDING LETTERS  
FIXED COPY SIGN



6'-Wall-Mount Logo Sign  
with 3'-8" Wall-Mount Readerboard

# ACORD CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YY)  
 07/21/1997

PRODUCER (207)781-2784 FAX  
 Desmond & Payne  
 366 US Rte. 1  
 Falmouth, Maine 04015

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW.

### COMPANIES AFFORDING COVERAGE

ADDY: Ext:  
 INSURED  
 Pro-Lube Dba Jiffy Lube  
 C/O Harry & Marie Crowell  
 201 Park Ave  
 West Springfield, MA 01089

- COMPANY A Harover
- COMPANY B
- COMPANY C
- COMPANY D

### COVERAGE

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED, NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN. THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

CO LTR	TYPE OF INSURANCE	POLICY NUMBER	POLICY EFFECTIVE DATE (MM/DD/YY)	POLICY EXPIRATION DATE (MM/DD/YY)	LIMITS
A	GENERAL LIABILITY	ZDP488514102	03/08/1997	03/08/1998	GENERAL AGGREGATE \$ 2,000,000
	COMMERCIAL GENERAL LIABILITY				PRODUCTS - COM/OP AGG \$ 2,000,000
	CLAIMS MADE - X OCCUR				PERSONAL & ADV INJURY \$ 2,000,000
	OWNER'S & CONTRACTOR'S PROT				EACH OCCURRENCE \$ 2,000,000
					FIRE DAMAGE (Any one fire) \$ 50,000
					MED EXP (Any one person) \$ 5,000
	AUTOMOBILE LIABILITY				COMBINED SINGLE LIMIT \$
	ANY AUTO				BODILY INJURY (Per person) \$
	ALL OWNED AUTOS				BODILY INJURY (Per accident) \$
	SCHEDULED AUTOS				PROPERTY DAMAGE \$
	HIREN AUTOS				
	NON-OWNED AUTOS				
	GARAGE LIABILITY				AUTO ONLY - EA ACCIDENT \$
	ANY AUTO				OTHER THAN AUTO ONLY:
					EACH ACCIDENT \$
					AGGREGATE \$
	EXCESS LIABILITY				EACH OCCURRENCE \$
	UMBRELLA FORM				AGGREGATE \$
	OTHER THAN UMBRELLA FORM				\$
	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY				EL EACH ACCIDENT \$
	THE PROPRIETOR PARTNER/EXECUTIVE OFFICERS ARE: <input type="checkbox"/> INCL <input type="checkbox"/> EXCL				EL DISEASE - POLICY LIMIT \$
	OTHER				EL DISEASE - EA EMPLOYEE \$

DESCRIPTION OF OPERATIONS/LOCATION/VEHICLES/SPECIAL ITEMS  
 or: Pro-Lube II, 260 Riverside St., Portland, ME 04103

### CERTIFICATE HOLDER

City of Portland  
 City Hall  
 477 Congress St  
 Portland, ME 04101

### CANCELLATION

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, THE ISSUING COMPANY WILL ENDEAVOR TO MAIL 10 DAYS WRITTEN NOTICE TO THE CERTIFICATE HOLDER NAMED TO THE LEFT, BUT FAILURE TO MAIL SUCH NOTICE SHALL IMPOSE NO OBLIGATION OR LIABILITY ON ANY KIND UPON THE COMPANY, ITS AGENTS OR REPRESENTATIVES.

AUTHORIZED REPRESENTATIVE

*[Signature]*

COBOL 265 (08/87)

ACORD CORPORATION 1988

