



PORTLAND

101 MCALISTER FARM ROAD

PETER & ELIZABETH VENTRE

TOWN	LOCATION	APPLICANT'S NAME
1)	<p>The Plumbing and Subsurface Wastewater Disposal Rules adopted by the State of Maine, Division of Health and Human Services pursuant to 22 M.R.S.A. § 42 (the "Rules") are incorporated herein by reference and made a part of this application and shall be consulted by the owner/applicant, the system installer and/or building contractor for further construction details and material specifications. The system Installer should contact Albert Frick Associates, Inc. 839-5563, if there are any questions concerning materials, procedures or designs. The system installer and/or building contractor installing the system shall be solely responsible for compliance with the Rules and with all state and municipal laws and ordinances pertaining to the permitting, inspection and construction of subsurface wastewater disposal systems.</p>	
2)	<p>This application is intended to represent facts pertinent to the Rules only. It shall be the responsibility of the owner/applicant, system Installer and/or building contractor to determine compliance with and to obtain permits under all applicable local, state and/or federal laws and regulations (including, without limitation, Natural Resources Protection Act, wetland regulations, zoning ordinances, subdivision regulations, Site Location of Development Act and Minimum Lot Size law) before installing this system or considering the property on which the system is to be installed a "buildable" lot. It is recommended that a wetland scientist be consulted regarding wetland regulations. Prior to the commencement of construction/installation, the local plumbing inspector or Code Enforcement Officer shall inform the owner/applicant and Albert Frick Associates, Inc of any local ordinances which are more restrictive than the Rules in order that the design may be amended. All designs are subject to review by local, state and/or federal authorities. Albert Frick Associates, Inc.'s liability shall be limited to revisions required by regulatory agencies pursuant to laws or regulations in effect at the time of preparation of this application.</p>	
3)	<p>All information shown on this application relating to property lines, well locations, subsurface structures and underground facilities (such as utility lines, drains, septic systems, water lines, etc.) are based upon information provided by the owner/applicant and has been relied upon by Albert Frick Associates, Inc. in preparing this application. The owner/applicant shall review this application prior to the start of construction and confirm this information. Well locations on abutting properties but not readily visible above grade should be confirmed by the owner/applicant prior to system installation to assure minimum setbacks.</p>	
4)	<p>Installation of a garbage (grinder) disposal is not recommended. If one is installed, an additional 1000 gallon septic tank or a septic tank filter shall be connected in series to the proposed septic tank. Risers and covers should be installed over the septic tank outlet per the "Rules" to allow for easy maintenance of filter.</p>	
5)	<p>The septic tank should be pumped within two years of installation and subsequently as recommended by the pump service, but in no event should the septic tank be pumped less often than every three years.</p>	
	<p>The system user shall avoid introducing kitchen grease or fats into this system. Chemicals such as septic tank cleaners and/or chlorine (such as from water treatment units) and controlled or hazardous substances shall not be disposed of in this system. Additives such as yeast or enzymes are discouraged, since they have not been proven to extend system life.</p>	
6)	<p>All septic tanks, pump stations and additional treatment tanks shall be installed to prevent ground water and surface water infiltration. Risers and covers should be properly installed to provide access while preventing surface water intrusion to within 6" of a finished ground surface.</p>	
	<p>Vehicular traffic over disposal system is prohibited unless specifically designed with H-20 rated components.</p>	

PORTLAND TOWN	101 MCALISTER FARM ROAD LOCATION	PETER & ELIZABETH VENTRE APPLICANT'S NAME
------------------	-------------------------------------	--

- 7) The actual waste water flow or number of bedrooms shall not exceed the design criteria indicated on this application without a re-evaluation of the system as proposed
- 8) The general minimum setbacks between a well (public or private) and septic system serving a single family residence is 100-300 feet, unless the local municipality has a more stringent requirement. A well installed by an abutter within the minimum setback distances prior to the issuance of a permit for the proposed disposal system may void this design.
- 9) When a gravity system is proposed: BEFORE CONSTRUCTION/INSTALLATION BEGINS, the system installer or building contractor shall review the elevations of all points given in this application and the elevation of the existing and/or proposed building drain and septic tank inverts for compatibility to minimum pitch requirements. In gravity systems, the invert of the septic tank(s) outlet(s) should be at least 4 inches above the invert of the distribution box outlet at the disposal area.
- 10) When an effluent pump is required: Pump stations should be sized per manufacturer's specifications to meet lift requirements and friction loss. Provisions shall be made to make certain that surface and ground water does not enter the septic tank or pump station, by sealing/grouting all seams and connections, and by placement of a riser and lid at or above grade. An alarm device warning of a pump failure shall be installed. Also, when pumping is required of a chamber system, install a 'T' connection in the distribution box and place 3 inches of stone or a splash plate in the first chamber. Insulate gravity pipes, pump lines and the distribution box as necessary to prevent freezing.
- 11) On all systems, remove the vegetation, organic duff and old fill material from under the disposal area and any fill extension. Additional fill beyond indicated on plan may be necessary to replace organic matter. On sites where the proposed system is to be installed in natural soil, scarify the bottom and sides of the excavated disposal area with a rake. Do not use wheeled equipment on the scarified soil surface. For systems installed in fill, scarify the native soil by roto-tilling or scarifying with teeth of backhoe to a depth of at least 8 inches over the entire disposal and fill extension area to prevent glazing and to promote fill bonding. Place fill in loose layers no deeper than 8 inches and compact before placing more fill (this ensures that voids and loose pockets are eliminated to minimize the chance of leakage or differential settling). Do not use wheeled equipment on the scarified soil area until after 12 inches of fill is in place. Keep equipment off proprietary devices. Divert the surface water away from the disposal area by ditching or shallow landscape swales.
- 12) Unless noted otherwise, fill shall be gravelly coarse sand, which contains no more than 5% fines (silt and clay). Crushed stone shall be clean and free of any rock dust from the crushing process.
- 13) Do not install systems on loamy, silty, or clayey soils during wet periods since soil smearing/glazing may seal off the soil interface.
- 14) Seed all filled and disturbed surfaces with perennial grass seed, with 4" min. soil or soil amendment mix suitable for growing, then mulch with hay or equivalent material to prevent erosion. Alternatively, bark or permanent landscape mulch may be used to cover system. Woody trees or shrubs are not permitted on the disposal area or fill extensions.
- 15) If an advanced wastewater treatment unit is part of the design, the system shall be operated and maintained per manufacturer's specifications.



Albert Frick Associates, Inc.
Soil Scientists & Site Evaluators
95A County Road Gorham, Maine 04038
(207) 839-5563

Fill Estimation Worksheet

Albert Frick Associates Inc.

95A County Road

Gorham, Me 04038


839-5563 FAX - 839-5564

E-Mail - Albert@albertfrick.Com

www.albertfrick.com

Town: Portland
 Project owner/applicant: Peter & Elizabeth Ventre
 101 McAlister Farm Road
 P

This worksheet is being provided as a complimentary tool to assist in estimating the **approximate** amount of fill required to construct the proposed system. This worksheet does not substitute for a personal visit to the site for your own estimate. These calculations are intended to serve as a check to your work. Site features beyond the model (terrain) can vary to affect model projections.

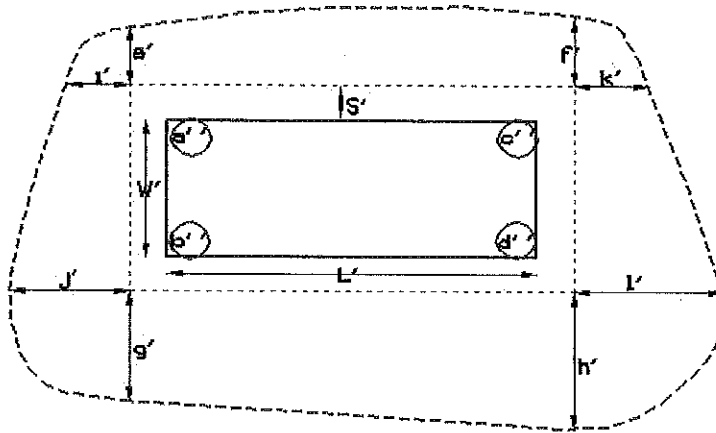

Length (L)	<u>75.00</u> feet
Width (W)	<u>21</u> feet
Shoulder (S)	<u>5</u> feet
<u>Depth of fill:</u>	
upper left (a)	<u>34</u> inches
upper right (c)	<u>34</u> inches
lower left (b)	<u>45</u> inches
lower right (d)	<u>38</u> inches
<u>Fill Extension:</u>	
left up (e)	<u>7</u> feet
right up (f)	<u>7</u> feet
left down (g)	<u>23</u> feet
right down (h)	<u>20</u> feet
upper left (i)	<u>7</u> feet
lower left (j)	<u>15</u> feet
upper right (k)	<u>7</u> feet
lower right (l)	<u>12</u> feet
Cost of fill per yard= \$ 0.00	

Body	308 cubic yards
Fill Down	118 cubic yards
Fill Up	32 cubic yards
Fill left	21 cubic yards
Fill right	17 cubic yards
Fill upleft	2 cubic yards
Fill upright	2 cubic yards
Fill downleft	14 cubic yards
Fill downright	8 cubic yards

SubTotal=	522 cubic yards
Shrinkage %=	15 %
Total Backfill	600 cubic yards

Adjusted cost of Total Backfill= \$ -