

**EXHAUST FAN INFORMATION -- Job#2347011**

| FAN UNIT NO. | FAN UNIT MODEL # | CFM | ESP.  | RPM  | HP.   | BHP.   | Ø | VOLT | FLA | WEIGHT (LBS.) | SONES |
|--------------|------------------|-----|-------|------|-------|--------|---|------|-----|---------------|-------|
| 1            | DJ33HFA          | 800 | 0.500 | 1379 | 0.333 | 0.1780 | 1 | 115  | 4.1 | 103           | 9.9   |


**FAN OPTIONS**

| FAN UNIT NO. | OPTION (Qty. - Descr.)                                  |
|--------------|---|
| 1            | 1 - Grease Box  |
| 1            | 1 - Full Crating For Exhaust Fans                       |
| 1            | 1 - 3 Year Extended Motor Warranty                      |
| 1            | 1 - Hinge Kit - Ships Loose For Curb Supplied by Others |
| 1            | 1 - Fan Base Ceramic Seal - For Grease Ducts            |

**FAN ACCESSORIES**

| FAN UNIT NO. | EXHAUST GRAVITY CLIP | WALL MOUNT | SUPPLY GRAVITY DAMPER | MOTORIZED DAMPER | WALL MOUNT |
|--------------|----------------------|------------|-----------------------|------------------|------------|
| 1            |                      |            |                       |                  |            |

**FAN #1 DJ33HFA -- EXHAUST FAN**

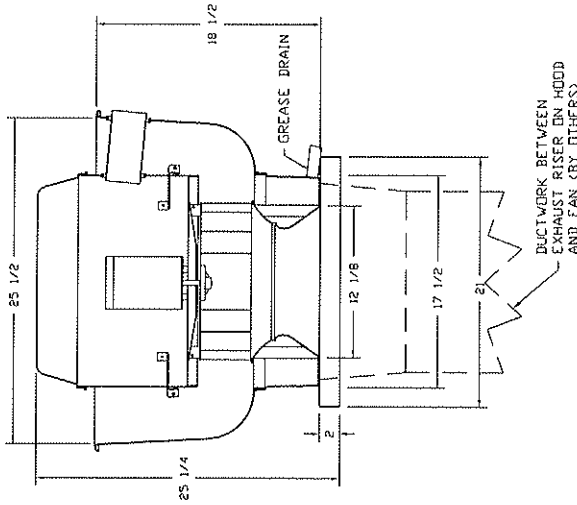

**FEATURES:**

- ROOF MOUNTED FANS
- RESTAURANT MODEL
- UL705 AND UL762
- VARIABLE SPEED CONTROL
- INTERNAL WIRING
- WEATHERPROOF DISCONNECT
- THERMAL OVERLOAD PROTECTION (SINGLE PHASE)
- HIGH HEAT OPERATION 300°F (149°C)
- GREASE CLASSIFICATION TESTING

**NORMAL TEMPERATURE TEST**  
 EXHAUST FAN MUST OPERATE CONTINUOUSLY WHILE EXHAUSTING AIR AT 300°F (149°C) UNTIL ALL FAN PARTS HAVE REACHED THERMAL EQUILIBRIUM, AND WITHOUT ANY DEGRADING EFFECTS TO THE FAN WHICH WOULD CAUSE UNSAFE OPERATION.

**ABNORMAL FLAME-UP TEST**  
 EXHAUST FAN MUST OPERATE CONTINUOUSLY WHILE EXHAUSTING BURNING GREASE VAPORS AT 600°F (316°C) FOR A PERIOD OF 15 MINUTES WITHOUT THE FAN BECOMING DAMAGED TO ANY EXTENT THAT COULD CAUSE AN UNSAFE CONDITION.

**OPTIONS:**

- GREASE BOX
- FULL CRATING FOR EXHAUST FANS
- 3 YEAR EXTENDED MOTOR WARRANTY
- HINGE KIT - SHIPS LOOSE FOR CURB SUPPLIED BY OTHERS
- FAN BASE CERAMIC SEAL - FOR GREASE DUCTS

**CUSTOMER APPROVAL TO MANUFACTURE:**

- Approved as Noted
- Approved with NO Exception Taken
- Revise and Resubmit
- SIGNATURE \_\_\_\_\_



JOB Kaufman House r2  
 LOCATION PORTLAND, ME., 04103  
 DATE 6/4/2015 JOB # 2347011  
 DWG # 2 DRAWN BY BFC-21