

EQUIPMENT SCHEDULE


UNIT#	MFG OR EQUAL	MODEL	CFM	HEAT INPUT MBH	COOL OUTPUT MBH	VOLTAGE	MOCP	WEIGHT WITH ACCESSORIES	NOTES
AHU-11	CARRIER	429HE16	1600	64.3	49.1	208/1/60	15	293	INDOOR 4 PIPE AHU HORIZ FLOW
AHU-12	CARRIER	429HE40	4000	181.5	129.3	208/3/60	30	391	INDOOR 4 PIPE AHU HORIZ FLOW
UH-1	MOODIE	WTC26	1340	86	-	115/1/60	15	66	LOADING DOCK UNIT HEATER
HX-1	RENEWARE	HE33RH	2000	53.4	34.9	460/3/60	20	1088	FULL ROOM HEAT RECOVERY UNIT W/ HW & CW COILS
DC-1	TRENTON	1FL3ES10V-T3A	29100	-	143.9	208/3/60	20	1253	FUTURE ROOFTOP DRY COOLER

This document is owned by, and the information contained in it, is proprietary to AAA Energy Service Co. By receipt hereof the holder agrees not to use the information, disclose it to any third party, nor reproduce this document without the prior written consent of AAA Energy Service Co., and agrees to return this document forthwith upon request.

#	REVISIONS	DATE
1.	Owner's Review	6/13/14

AAA ENERGY SERVICE CO.
 4 Commercial Road • P.O. Box 908
 Scarborough, ME 04070-0908
 (207) 883-1473 • FAX (207) 883-8371

QUALITY IS HARD TO DEFINE BUT EASY TO RECOGNIZE™

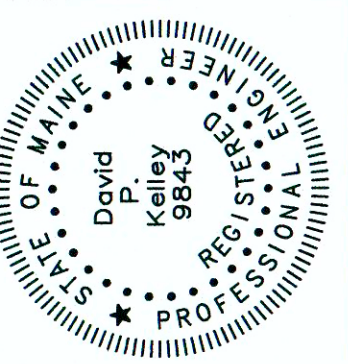

IMMUCELL CORP
 CLIENT
 BUILDING ADDITION
 PROJECT
 PROPOSED MECHANICAL
 DRAWING TITLE

DATE: 7/16/14
 SCALE: 1/8" = 1'-0"
 DRAWN BY: KJD
 CHECKED BY: DPK
 JOB NUMBER: TBD
 CAD FILE: IMMU-ADDTN
 SHEET NUMBER

M2
 1 OF 1 SHEET