

AIR HANDLING UNIT SCHEDULE

TAG	AREA SERVED	COOLING TONS	HEATING MBH IN	MANUFACTURER	MODEL NUMBER	ELECTRIC VOLTS/PHASE	MCA AMPS	MAX FUSE	WEIGHT	STAGES	REMARKS
AHU-1	OPEN OFFICE	4	100	LENNOX/AIRFC-FLD	AF90PFC00U4	115 / 1	10.6	15	158 LBS	1H / 1C	1
AHU-2	OFFICES	2	50	LENNOX/AIRFC-FLD	AF90PFC00U3	115 / 1	9.2	15	152 LBS	1H / 1C	1
CU-1	AHU-1	4	---	LENNOX/AIRFC-FLD	AFAIR10B48	208 / 1	26.9	45	---	---	---
CU-2	AHU-2	2	---	LENNOX/AIRFC-FLD	AFAIR10B24	208 / 1	14.4	25	---	---	---

REMARKS: 1. LP KIT

EXHAUST FAN SCHEDULE

TAG	AREA SERVED	CFM	MANUFACTURER	MODEL NUMBER	ELECTRIC VOLTS/PHASE	AMPS	WEIGHT	REMARKS
EF-1	TOILET	75	COOK	GC-120	115 / 1	4.5	13 LBS	CEILING MOUNTED
EF-2	TOILET	75	COOK	GC-120	115 / 1	4.5	13 LBS	CEILING MOUNTED



AIR DEVICE SCHEDULE

TAG	SIZE	MAX CFM	MAX NC	THROW	REMARKS
CD-1	5"	98-157	4.5-15	1-2-4	SQUARE CONE DIFFUSER 1-BAR LAY-IN
CD-2	8"	175-279	4.5-19	2-3-6	SQUARE CONE DIFFUSER 1-BAR LAY-IN
CD-3	10"	273-436	4.5-21	3-4-8	SQUARE CONE DIFFUSER 1-BAR LAY-IN
RG	24" x 24"	---	---	---	EGGGRATE RETURN GRILLE 1-BAR LAY-IN

UNIT HEATER SCHEDULE

TAG	AREA SERVED	COOLING TONS	HEATING MBH IN	MANUFACTURER	MODEL NUMBER	ELECTRIC VOLTS/PHASE	MCA AMPS	WEIGHT	STAGES	REMARKS
UH-1	WAREHOUSE	---	200	LENNOX	LF-24-200	115 / 1	4.5	175 LBS	1H	1
UH-2	WAREHOUSE	---	200	LENNOX	LF-24-200	115 / 1	4.5	175 LBS	1H	1

REMARKS: 1. LP KIT

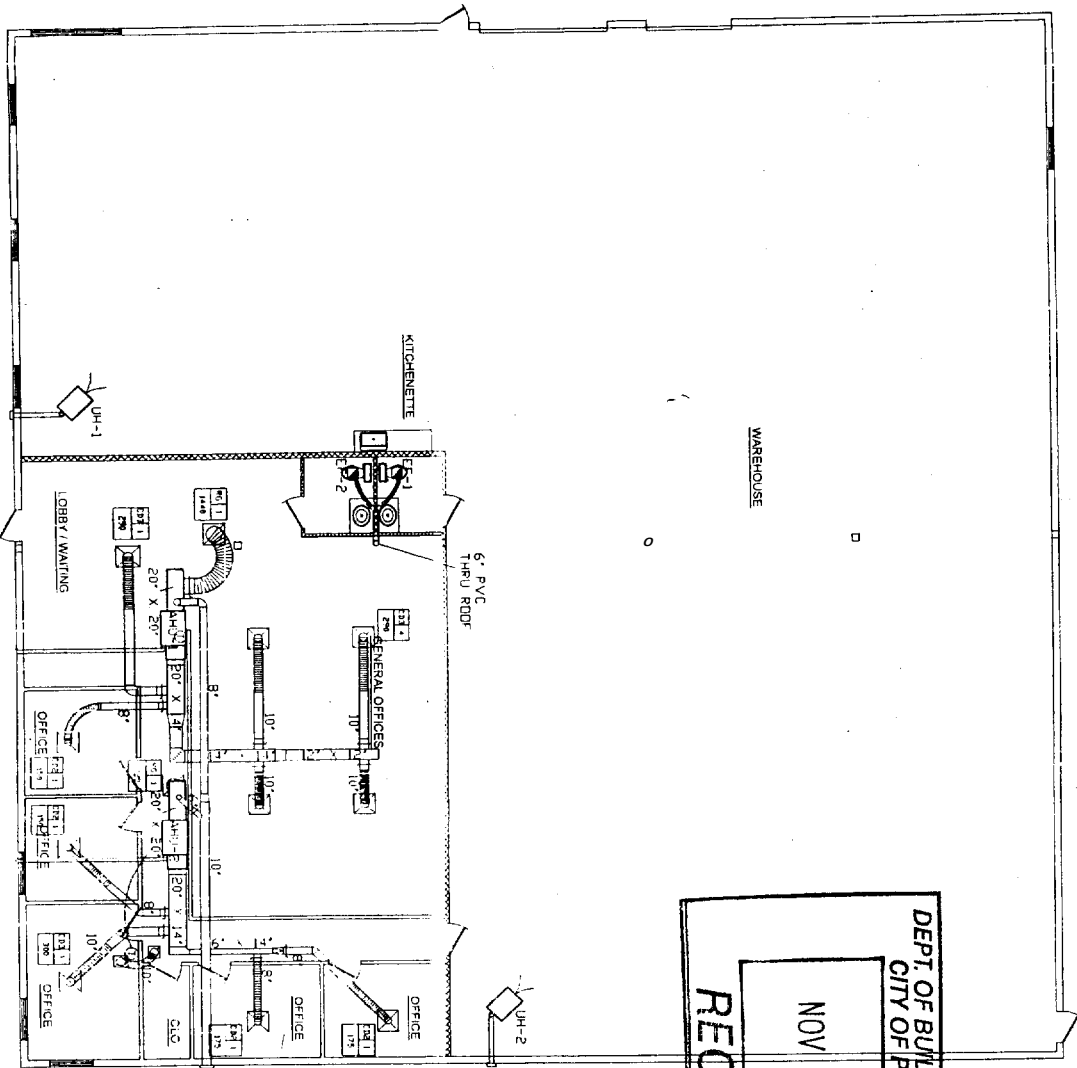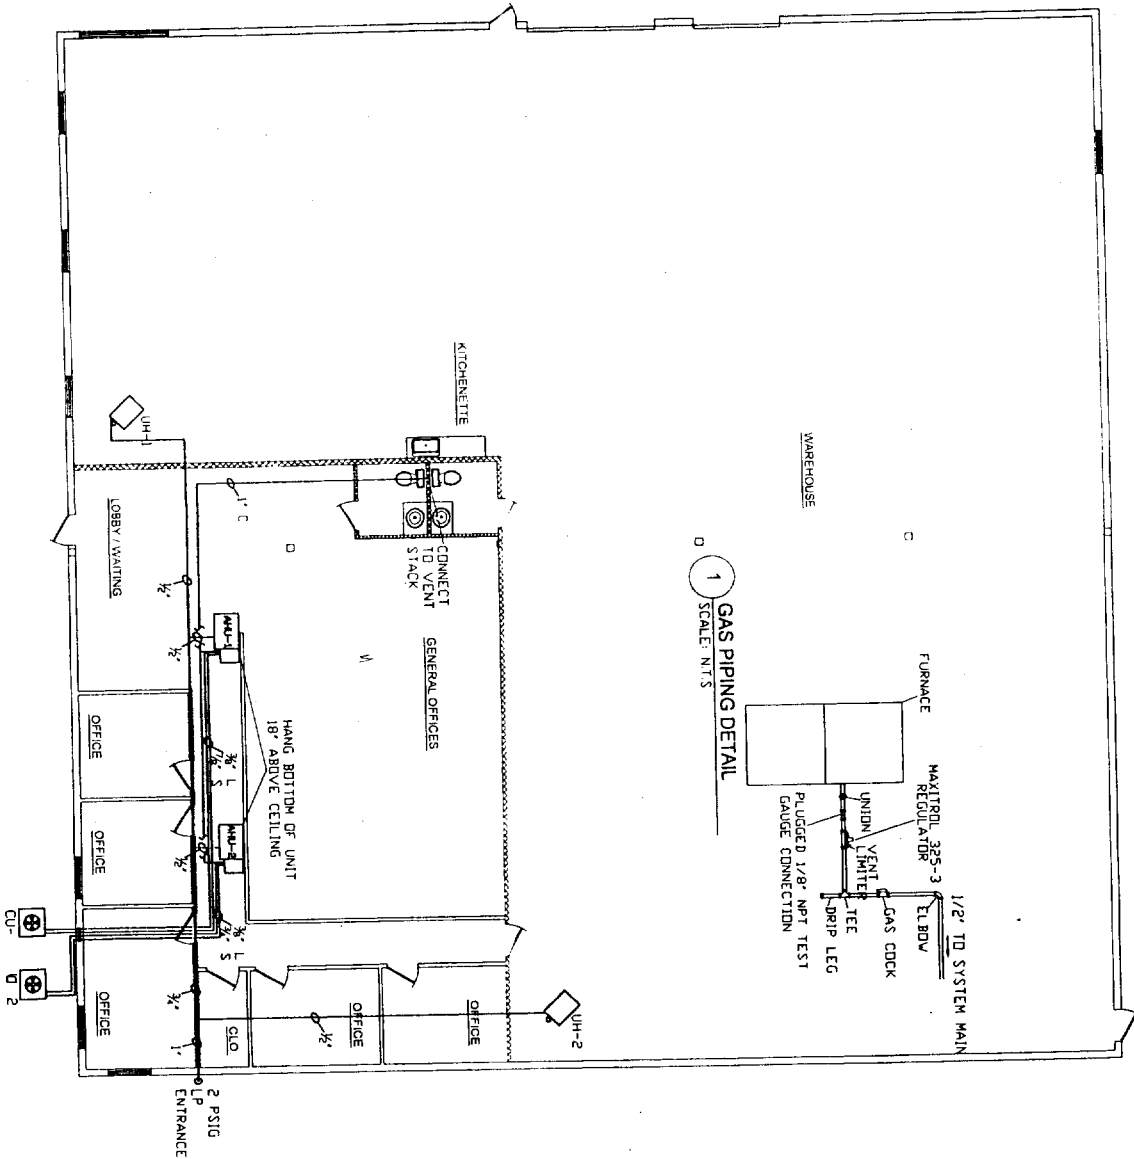

DEPT. OF BUILDING INSPECTION
CITY OF PORTLAND, ME
NOV 7 2005
RECEIVED

Sheet 451

01	REVISIONS	DATE	BY
02			
03			
04			
05			

DIRECTECH
83 WALCH DRIVE
PORTLAND, MAINE

AIRTEMP MECHANICAL CONTRACTORS
A Comfort Systems USA Company

AIRTEMP MECHANICAL CONTRACTORS
11 WALLACE AVENUE
SOUTH PORTLAND, MAINE 04106

M-1
1/8" = 1'