

**STATEMENT OF SPECIAL  
CONSTRUCTION MONITORING**

**PROJECT: PURESTAT EXTRUSIONS LLC – STORAGE MEZZANINE  
75 WALCH DR, PORTLAND ME**

**PERMIT APPLICANT: Biskup Construction Inc  
APPLICANT'S ADDRESS: 16 Danielle Dr, Windham, ME 04062**

**STRUCTURAL ENGINEER OF RECORD: Associated Design Partners, Inc**

**CONTRACTOR: Biskup Construction Inc**

This Statement of Special Construction Monitoring is submitted as a condition for building permit issuance in accordance with Section 1704.0 of the 2009 International Building Code. It includes the Schedule of Special Construction Monitoring and Testing as applicable to this project. Also included is a listing of agents and other approved agencies to be retained for conducting the monitoring and testing applicable to this project.

The Special Construction Monitoring Coordinator shall keep records of all observations listed herein, and shall furnish field reports to the Registered Design Professional of Record. All discrepancies shall be brought to the immediate attention of the Contractor for correction, and to the Registered Design Professional of Record. If the discrepancies are not corrected, the discrepancies shall be brought to the attention of the Registered Design Professional of Record. Interim reports shall be submitted to the Registered Design Professional of Record monthly, unless more frequent submissions are requested.

The Special Inspection program does not relieve the Contractor of his or her responsibilities. Job site safety is solely the responsibility of the Contractor. Materials and activities covered under the monitoring schedule are not to include the Contractor's equipment and methods used to erect or install the materials listed.

Prepared by:

Aaron S. Wilson, P.E.


\_\_\_\_\_  
(type or print name)



Signature

3/8/17

\_\_\_\_\_  
Date

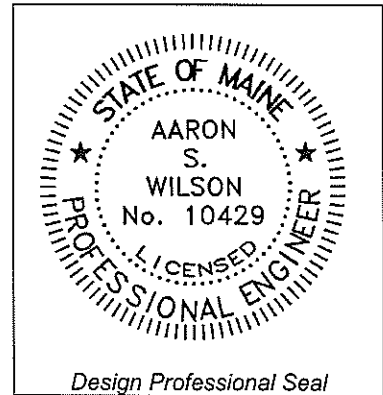

Owner's Authorization:

Building Official's Acceptance:



Signature

3/8/17

\_\_\_\_\_  
Date

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Date

**SPECIAL CONSTRUCTION MONITORING AGENTS**

This Statement of Special Construction Monitoring / Quality Assurance Plan includes the following building systems:

- |  |  |
|--|--|
| <input type="checkbox"/> Soils and Foundations     | <input type="checkbox"/> Spray Fire Resistant Material         |
| <input type="checkbox"/> Cast-in-Place Concrete    | <input checked="" type="checkbox"/> Wood Construction          |
| <input type="checkbox"/> Precast Concrete          | <input type="checkbox"/> Exterior Insulation and Finish System |
| <input type="checkbox"/> Masonry                   | <input type="checkbox"/> Mechanical & Electrical Systems       |
| <input type="checkbox"/> Structural Steel          | <input type="checkbox"/> Architectural Systems                 |
| <input type="checkbox"/> Cold-Formed Steel Framing | <input type="checkbox"/> Special Cases                         |

AGENT	FIRM	CONTACT INFORMATION
1. Engineer of Record	<b>Associated Design Partners</b>	80 Leighton Rd Falmouth ME 04105 Ph: 878-1751
2. Special Construction Monitoring Coordinator	<b>Associated Design Partners</b>	80 Leighton Rd Falmouth ME 04105 Ph: 878-1751
3. Field Monitor	<b>Associated Design Partners</b>	80 Leighton Rd Falmouth ME 04105 Ph: 878-1751
4. Testing Agency	N/A	
5. Other		

Note: The construction monitoring agent and testing agency shall be engaged by the Owner or the Owner's Agent, and not by the Contractor or Subcontractor whose work is to be inspected or tested. Any conflict of interest must be disclosed to the Building Official, prior to commencing work.

## QUALITY ASSURANCE FOR LATERAL SYSTEMS

### Quality Assurance for Seismic Requirements

Seismic Design Category *C*  
Quality Assurance Plan Required (Y/N) *Y*

If seismic design category C, and plan is not required, explain:  
*Reference exception 1705.3.1 with  $R \leq 3$  and seismic force resisting system not specifically detailed for seismic resistance.*

Description of seismic force resisting system and designated seismic systems:

*LIGHT FRAMED WOOD SHEARWALLS*

### Quality Assurance for Wind Requirements

Basic Wind Speed (3 second gust) *NA*  
Quality Assurance Plan Required (Y/N) *N*  
*INTERIOR MEZZANINE NOT EXPOSED TO EXTERNAL WIND FORCES.*

### Statement of Responsibility

Each contractor responsible for the construction or fabrication of a system or component designated above must submit a Statement of Responsibility in accordance with section 1705.3, and 1706.3 of the 2003 IBC code.

The qualifications of all personnel performing Special Inspection and testing activities are subject to the approval of the Building Official. The credentials of all Inspectors and testing technicians shall be provided if requested.

Key for Minimum Qualifications of Inspection Agents:

When the Registered Design Professional in Responsible Charge deems it appropriate that the individual performing a stipulated test or inspection have a specific certification or license as indicated below, such designation shall appear below the *Agency Number* on the Schedule.

PE/SE	Structural Engineer – a licensed SE or PE specializing in the design of building structures
PE/GE	Geotechnical Engineer – a licensed PE specializing in soil mechanics and foundations
EIT	Engineer-In-Training – a graduate engineer who has passed the Fundamentals of Engineering examination

#### **American Concrete Institute (ACI) Certification**

ACI-CFTT	Concrete Field Testing Technician – Grade 1
ACI-CCI	Concrete Construction Inspector
ACI-LTT	Laboratory Testing Technician – Grade 1&2
ACI-STT	Strength Testing Technician

#### **American Welding Society (AWS) Certification**

AWS-CWI	Certified Welding Inspector
AWS/AISC-SSI	Certified Structural Steel Inspector

#### **American Society of Non-Destructive Testing (ASNT) Certification**

ASNT	Non-Destructive Testing Technician – Level II or III.
------	---

#### **International Code Council (ICC) Certification**

ICC-SMSI	Structural Masonry Special Inspector
ICC-SWSI	Structural Steel and Welding Special Inspector
ICC-SFSI	Spray-Applied Fireproofing Special Inspector
ICC-PCSI	Pre-stressed Concrete Special Inspector
ICC-RCSI	Reinforced Concrete Special Inspector

#### **National Institute for Certification in Engineering Technologies (NICET)**

NICET-CT	Concrete Technician – Levels I, II, III & IV
NICET-ST	Soils Technician - Levels I, II, III & IV
NICET-GET	Geotechnical Engineering Technician - Levels I, II, III & IV

#### **Exterior Design Institute (EDI) Certification**

EDI-EIFS	EIFS Third Party Inspector
----------	----------------------------

**TABLE 1 – SCHEDULE OF SPECIAL CONSTRUCTION MONITORING**

MATERIAL / ACTIVITY	EXTENT of MONITORING (Continuous, Periodic, Other, Exempt, None)	COMMENTS	AGENT #	DATE COMPLETED	REV #
<b>1704.3 STEEL CONSTRUCTION</b>					
1. Material Verification of high strength bolts, nuts, and washers.	a. Identification markings to conform to ASTM standards specified in the approved construction documents.	None	Provide inspection reports for field installed bolts to Agent 5 also.		
	b. Manufacturers Certificate of Compliance required.	None	Fabricator to provide registration and approval Certificate per 1704.2.2.		
2. Inspection of High – Strength Bolting	a. Bearing type connections	None	Provide inspection reports to Agent 5 also.		
	b. Slip – critical connections	None	No S-C connections in building		
3. Material Verification of structural steel	a. Identification marking to conform to ASTM standards specified in the contract documents.	None	Fabricator to provide registration and approval Certificate per IBC 1704.2.2.		
	b. Manufacturers certified mill test Reports.	None	Fabricator to provide registration and approval Certificate per IBC 1704.2.2.		
4. Material Verification of weld filler materials:	a. Identification marking to conform to AWS standards specified in the contract documents.	None	Fabricator to provide registration and approval Certificate per IBC 1704.2.2.		
	b. Manufacturers Certificate of Compliance required.	None	Fabricator to provide registration and approval Certificate per 1704.2.2. No Field Welding.		
5. Inspection of Welding – Structural Steel	a. Single Pass fillet welds < 5/16"	None	Fabricator to provide registration and approval Certificate per 1704.2.2. No Field Welding.		
	b. Roof deck attachment	None	Provide inspection reports to Agent 5 also.		
6. Inspection of Steel Frame Joint details for compliance with approved documents.	a. Bracing / moment frame connections	None	Provide inspection reports to Agent 5 also.		
	b. Member locations	None	Provide inspection reports to Agent 5 also.		
	c. Application of joint details at each connection.	None	Provide inspection reports to Agent 5 also.		

**TABLE 1 – STATEMENT OF SPECIAL INSPECTIONS, cont.**

MATERIAL/ACTIVITY	EXTENT of INSPECTION (Continuous, Periodic, Other, None)	COMMENTS	AGENT #	DATE COMPLETED	REV #
<b>1704.4 CONCRETE CONSTRUCTION</b>					
1. Inspection of reinforcing steel, including placement.	None				
2. Inspection of reinforcing steel welding	None				
3. Inspect bolts embedded into concrete prior to and during placement of concrete where allowable loads have been increased.	None				
4. Verify concrete mix design(s)	None				
5. Sample fresh concrete for strength tests, perform slump and air content tests, and determine temperature of concrete.	None				
6. Inspection of concrete placement for proper techniques.	None				
7. Inspection for maintenance of specified curing temperature and techniques.	None				
<b>1704.5 MASONRY CONSTRUCTION - Level 1 Special Inspection for non-essential facility – 1704.5.2</b>					
1. As Masonry Construction begins, the following shall be verified to ensure conformance	a. Proportions of site-prepared mortar	None			
	b. Construction of mortar joints	None			
	c. Location of reinforcement	None			
	d. Pre-stressing technique	None			
	e. Grade and size of pre-stressing tendons.	None			
2. The Inspection program shall verify the following:	a. Size and location of structural elements.	None			
	b. Type, size, and location of embedded anchors.	None			
	c. Size, grade, and type of reinforcing	None			
<b>1704.5 MASONRY CONSTRUCTION - Level 1 Special Inspection for non-essential facility – 1704.5.2</b>					

**TABLE 1 – STATEMENT OF SPECIAL INSPECTIONS, cont.**

MATERIAL/ACTIVITY		EXTENT of INSPECTION (Continuous, Periodic, Other, None)	COMMENTS	AGENT #	DATE COMPLETED	REV #
2. The Inspection program shall verify the following, cont:	d. welding of reinforcing bars	None				
	e. Protection of Masonry during cold weather (temp. below 40 deg F.)	None				
	f. Application and measurement of pre-stressing reinforcement	None	No pre-stressing in building			
3. Prior to grouting, the following shall be verified to ensure compliance.	a. Grout space is clean	None				
	b. Placement of reinforcement	None				
	c. Proportions of site-prepared grout	None				
	None	None				
4. Grout placement shall be verified to ensure compliance with code and construction document provisions.		None				
5. Preparation of any grout specimens, mortar specimens and/or prisms shall be observed		None				
6. Compliance with required inspection provisions of the construction documents and the approved submittals shall be verified.		None				
<b>1704.6 WOOD CONSTRUCTION</b>						
1. Horizontal Diaphragms and Vertical Shearwalls	a. Inspect sheathing size, grade, and thickness for conformance with construction documents.	Periodic				
	b. Inspect sheathing fastener size and pattern for conformance with construction documents.	Periodic				
	c. Verify attachment to supporting elements is per contract documents.	Periodic				
2. Wood truss fabricator certification / quality control procedures	Verify shop fabrication and quality control procedures for wood truss plant.	None				
3. Material Grading	Verify material grading for sawn lumber for compliance with construction documents. Verify manufactured lumber (LVL's, PSL's) for conformance with construction documents.	Periodic				

**TABLE 1 – STATEMENT OF SPECIAL INSPECTIONS, cont.**

MATERIAL/ACTIVITY	EXTENT of INSPECTION (Continuous, Periodic, Other, None)	COMMENTS	AGENT #	DATE COMPLETED	REV #
<b>1704.6 WOOD CONSTRUCTION</b>					
4. Wood Connections	Verify that connections are made as shown in the contract documents. For connections not specifically detailed, verify conformance with IBC 2003 Ch. 23	Periodic			
5. Framing	Verify that framing is installed in accordance with construction documents.	Periodic			
6. Pre-Fabricated Wood Trusses	Inspect truss and all bracing installation. Bracing to be installed per fabricator's recommendations and BCSI I-03	None			
<b>1704.7 SOILS</b>					
1. Site Preparation	Inspect preparation of site for conformance with Geotechnical recommendations prior to placement of prepared fill.	None			
2. Fill Placement	During Fill Placement verify that material and lift thickness comply with approved Geotechnical report.	None			
3. In-Place Soil Density	Verify compliance of in-place compacted dry density with approved Geotechnical report.	None			
<b>1704.7 PILE FOUNDATIONS</b>	Record installation and testing of procedures of each pile. Submit reports to building official and EOR. Reports to include pile tip cutoff elevation relative to a common benchmark.	None			
<b>1704.10 ARCHITECTURAL WALL PANELS AND VENEERS</b>	Verify compliance of attachment of interior and exterior Architectural veneers to supporting structure for building in Seismic Design Category E or F.	None			
<b>1704.11 SPRAYED FIRE-RESISTANT MATERIAL</b>	a. Verify conformance of the prepared surface with manufacturer's specifications prior to application of material.	None	No Sprayed Fire-Resistant material in building.		



**TABLE 1 – STATEMENT OF SPECIAL INSPECTIONS, cont.**

MATERIAL/ACTIVITY		EXTENT of INSPECTION (Continuous, Periodic, Other, None)	COMMENTS	AGENT #	DATE COMPLETED	REV #
	b. Verify that substrate's ambient temperature meet manufacturer's specifications.	None				
	c. Verify that material thickness meets design specifications.	None				
	d. Verify that the material density meets the design specifications. Test in accordance with ASTM E 605.	None				
	e. Verify that bond strength between material and substrate is greater than or equal to 150 psf. Test in accordance with ASTM E 736 and IBC 2003 1704.11.5.1 – 1704.11.5.2	None				
1704.12	EXTERIOR AND INSULATION AND FINISH SYSTEMS (EIFS) Verify conformance of EIFS installation with manufacturers and design specifications.	None	No EIFS on building.			
1704.13	SPECIAL CASES COLD FORMED METAL FRAMING					
1.	Framing Verify member size, thickness, material, and spacing is in accordance with design specifications and drawings.	None				
2.	Framing Connections Verify that member connections are in accordance with design specifications and drawings.	None				
3.	Welding Verify welding of cold formed members is in accordance with design specifications and AWS standards.	None				
4.	Light Gage Trusses a. Verify that light gage trusses are design in accordance with the loads specified on the contract documents.	None				
	b. Verify that light gage trusses and truss bracing is installed per manufacturers specifications.	None				

**TABLE 1 – STATEMENT OF SPECIAL INSPECTIONS, cont.**

MATERIAL/ACTIVITY		EXTENT of INSPECTION (Continuous, Periodic, Other, None)	COMMENTS	AGENT #	DATE COMPLETED	REV #
	contract documents, and BCSI 1-03 guidelines.					
1704.10 SMOKE CONTROL	a. Test ductwork for leakage and recode device locations prior to concealment of mechanical systems.	None				
	b. Prior to building occupation, perform pressure difference testing, flow measurements and detection, and control monitoring.	None				