

**GENERAL NOTES:**

- THIS PROJECT IS SUBJECT TO THE TERMS AND CONDITIONS OF ALL REGULATIONS ADMINISTERED BY THE MAINE DEPARTMENT OF ENVIRONMENTAL PROTECTION, MAINE DEPARTMENT OF TRANSPORTATION, LOCAL UTILITY COMPANIES AND THE CITY OF PORTLAND.
- THE CONTRACTOR SHALL REFER TO THE DESIGN-BUILD PLANS OF UNIT #1 FOR EXACT LOCATIONS AND DIMENSIONS OF THE ENTRANCES, PAVING, EXITS, PRECISE BUILDING DIMENSIONS, AND EXACT BUILDING UTILITY ENTRANCE POINTS.
- ALL REQUIRED AND NECESSARY INSPECTIONS AND/OR CERTIFICATIONS REQUIRED BY CODES AND/OR UTILITY SERVICE COMPANIES SHALL BE PERFORMED PRIOR TO ANNOUNCED BUILDING POSSESSION AND THE FINAL SERVICE CONNECTIONS.
- THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR THE ELEVATION OF THE EXISTING UTILITIES AS SHOWN ON THESE PLANS IS BASED ON RECORDS OF THE VARIOUS UTILITY COMPANIES AND, WHERE POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THIS INFORMATION IS NOT TO BE RELIED ON AS BEING EXACT OR COMPLETE. THE CONTRACTOR MUST CALL THE APPROPRIATE UTILITY COMPANY AND DIG SAFE. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RELOCATE ALL EXISTING UTILITIES WHICH CONFLICT WITH THE PROPOSED IMPROVEMENTS SHOWN ON THE PLANS.
- MAINTENANCE OF EROSION CONTROL MEASURES IS OF PARAMOUNT IMPORTANCE TO THE OWNER AND THE CONTRACTOR IS RESPONSIBLE FOR COMPLYING WITH ALL EROSION CONTROL MEASURES SHOWN ON THE PLANS. ADDITIONAL EROSION CONTROL MEASURES SHALL BE INSTALLED IF DEEMED NECESSARY BY ONSITE INSPECTIONS OF THE OWNER OR THEIR REPRESENTATIVES AT NO ADDITIONAL COST TO THE OWNER.
- ALL MATERIAL SCHEDULES SHOWN ON THE PLANS ARE FOR GENERAL INFORMATION ONLY. THE CONTRACTOR SHALL PREPARE HIS OWN MATERIAL SCHEDULES BASED UPON HIS PLAN REVIEW. ALL SCHEDULES SHALL BE VERIFIED IN THE FIELD BY THE CONTRACTOR PRIOR TO ORDERING MATERIALS OR PERFORMING WORK.
- ALL MATERIALS AND CONSTRUCTION METHODS SHALL CONFORM TO MAINE DEPARTMENT OF TRANSPORTATION SPECIFICATIONS, THE PROJECT SPECIFICATIONS, AND THE CITY OF PORTLAND TECHNICAL STANDARDS.
- EXISTING CONDITIONS AND TOPOGRAPHIC SURVEYS ARE BASED ON BASE MAPPING AND BOUNDARY SURVEY DEPICTED ON PLAN TITLED "EXISTING CONDITIONS SITE PLAN" BY BH2M, GORHAM, ME 04038 DATED MAY 1994, JOB 94-060.
- THE PROPERTY SHOWN ON THIS PLAN MAY BE DEVELOPED AND USED ONLY AS DEPICTED ON THIS APPROVED PLAN. ALL ELEMENTS AND FEATURES OF THE PLAN AND ALL REPRESENTATIONS MADE BY THE APPLICANT CONCERNING THE DEVELOPMENT AND USE OF THE PROPERTY WHICH APPEAR IN THE RECORD OF THE PLANNING BOARD PROCEEDINGS ARE CONDITIONS OF THE APPROVAL. NO CHANGE FROM THE CONDITIONS OF APPROVALS IS PERMITTED UNLESS AN AMENDED PLAN IS FIRST SUBMITTED TO AND APPROVED BY THE PLANNING AUTHORITY.
- THE C-SERIES PLAN SET IS PART OF A CONSTRUCTION PLAN SET PREPARED BY STANTEC CONSULTING SERVICES INC. THE CONTRACTOR SHALL REVIEW AND COORDINATE THE WORK WITH OTHER PLANS INCLUDING ARCHITECTURAL, STRUCTURAL AND MEP DRAWINGS. ANY CONFLICTS OR INCONSISTENCIES BETWEEN THESE PLANS SHALL BE IMMEDIATELY BROUGHT TO THE OWNER'S REPRESENTATIVE AND CONSTRUCTION MANAGERS.

**SITE LAYOUT NOTES:**

- ALL SIGNAGE SHALL CONFORM TO THE STANDARDS FOR SIZE, HEIGHT, LOCATION, AND REFLECTIVITY SET FORTH IN THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD).
- ALL PARKING STALLS SHALL BE MARKED OFF BY 4" SOLID WHITE LINES EXCEPT AS SHOWN ON THE LAYOUT PLAN.
- ALL CURB SHALL CONFORM TO THE FOLLOWING SPECIFICATIONS AS NOTED ON THE PLANS:  

SPACE AND BULK REGULATIONS	REQUIRED	ACTUAL
MINIMUM LOT AREA	NONE	816,314 S.F.
MINIMUM STREET FRONTAGE	60'	716.48'
MINIMUM PAVEMENT SETBACKS	10'	18'
MINIMUM STRUCTURE SETBACKS		
FRONT YARD	25'	25'
SIDE/REAR YARD	25'	28'
MAXIMUM IMPERVIOUS SURFACE RATIO	75%	60%
MAXIMUM BUILDING HEIGHT	75'	SINGLE STORY
- ALL DIMENSIONING UNLESS OTHERWISE NOTED IS TO THE FACE OF CURB OR FACE OF BUILDING.
- EXCEPT WHERE INDICATED OTHERWISE, THE PAVEMENT IS TO BE STANDARD DUTY PAVEMENT.
- BUILDING SUMMARY: SEE FOURTH AMENDED CONDOMINIUM PLAT
- ZONING DATA  
IM INDUSTRIAL-MODERATE IMPACT ZONE
- THE FACILITIES WILL BE SERVICED BY CITY SEWER, PUBLIC WATER AND A COMBINATION OF OVERHEAD AND UNDERGROUND UTILITIES.
- ALL METHODS AND MATERIALS USED IN THE CONSTRUCTION OF THE IMPROVEMENTS IDENTIFIED HEREIN SHALL CONFIRM TO THE CITY OF PORTLAND CONSTRUCTION AND TECHNICAL STANDARDS AND SPECIFICATIONS AND/OR CURRENT MDOT STANDARDS AND SPECIFICATIONS, WHICHEVER IS MORE STRINGENT.
- THE CONTRACTOR OR DEVELOPER IS REQUIRED TO NOTIFY THE CITY OF PORTLAND PUBLIC WORKS INSPECTION SERVICES DIVISION (874-8300 EXT. 8838), CODE ENFORCEMENT OFFICE AND DEVELOPMENT REVIEW COORDINATOR IN WRITING THREE (3) DAYS PRIOR TO THE BEGINNING OF CONSTRUCTION. SHOULD THE IMPROVEMENTS BE OF SIGNIFICANT CONCERN OR IN A SENSITIVE AREA, A PRECONSTRUCTION MEETING MAY BE REQUIRED AT THE DISCRETION OF THE PUBLIC WORKS AUTHORITY OR DEVELOPMENT REVIEW COORDINATOR.
- AN APPROVED SET OF PLANS AND ALL APPLICABLE PERMITS MUST BE AVAILABLE AT THE CONSTRUCTION SITE. THE DEVELOPER, OR AN AUTHORIZED AGENT, MUST BE AVAILABLE AT ALL TIMES DURING CONSTRUCTION.
- WARNING SIGNS, MARKERS, BARRICADES OR FLAGMEN MUST BE EMPLOYED ON RIVERSIDE STREET AS NECESSARY.
- CONSTRUCTION DEBRIS SHALL BE CONTAINERIZED AND DISPOSED OF IN ACCORDANCE WITH THE CITY OF PORTLAND'S SOLID WASTE ORDINANCE CHAPTER 12.
- ANY DAMAGE TO PUBLIC OR PRIVATE PROPERTY RESULTING FROM CONSTRUCTION ACTIVITIES SHALL BE REPAIRED BY THE DEVELOPER/CONTRACTOR AT THEIR EXPENSE.
- PROPERTY MARKERS AND STREET LINE MONUMENTS SHALL BE PROPERLY PROTECTED AT ALL TIMES DURING CONSTRUCTION TO INSURE INTEGRITY. IF DISTURBED THEY SHALL BE REPLACED BY A SURVEYOR REGISTERED IN THE STATE OF MAINE AT THE CONTRACTOR/DEVELOPER'S EXPENSE.
- ALL SANITARY SERVICES AND APPURTENANCES SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE CURRENT STANDARDS AND SPECIFICATIONS OF THE CITY OF PORTLAND PUBLIC WORKS SEWER DIVISION.
- A STREET OPENING PERMIT MUST BE OBTAINED FROM THE CITY OF PORTLAND PUBLIC WORKS DEPARTMENT PRIOR TO BEGINNING ANY WORK WITHIN THE CITY RIGHT-OF-WAY.
- RETAINING WALLS WITHIN LOADING DOCK AREAS SHALL BE CAST-IN-PLACE OR PRECAST MODULAR BLOCK SUBJECT TO GEOTECHNICAL REVIEW AND DESIGN BY THE CONTRACTOR OR PRECAST MODULAR BLOCK SUPPLIER.

**UTILITY NOTES:**

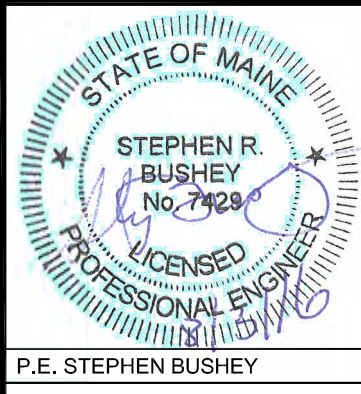

- ALL REQUIRED UTILITIES SERVING THE PROJECT SHALL BE COORDINATED AND CONSTRUCTED BY THE DIVISION 2 CONTRACTOR TO WITHIN 5 FEET OF THE BUILDINGS, AT A LOCATION COORDINATED WITH THE DIVISION 15 OR 16 CONTRACTOR AND THE BUILDING PLANS. DIVISION 2 WORK WITHIN 5 FEET OF UNDERSLAB UTILITIES SHALL CONSIST OF TRENCHING AND BACKFILLING. ACTUAL UTILITY INSTALLATION SHALL BE BY THE DIVISION 15/16 CONTRACTOR. ALL REQUIRED CONNECTION FEES SHALL BE PAID BY THE GENERAL CONTRACTOR.
- THE CONTRACTOR SHALL COORDINATE THE INSTALLATION OF AND/OR RELOCATION OF OVERHEAD AND UNDERGROUND TELEPHONE WITH FAIRPOINT. CONTRACTOR SHALL BE RESPONSIBLE FOR CONDUITS, PULL WIRES, TRENCHING AND BACKFILLING NECESSARY TO COMPLETE THE WORK.
- ALL SANITARY SEWER WORK SHALL MEET THE STANDARDS OF THE MAINE STATE PLUMBING CODE AND CITY OF PORTLAND PUBLIC WORKS.
- THE CONTRACTOR SHALL COORDINATE THE INSTALLATION OF ELECTRIC SERVICE WITH CENTRAL MAINE POWER.
- COORDINATE ALL UTILITY WORK WITH THE APPROPRIATE UTILITY COMPANY. ALL UTILITY WORK SHALL CONFORM TO THE STANDARDS OF THE UTILITY COMPANY AND PROJECT SPECIFICATIONS.
- THE LOCATIONS OF THE NEW UTILITY SERVICES AND CONNECTIONS SHALL BE COORDINATED WITH THE SERVING UTILITY COMPANY.
- UNDERGROUND ELECTRICAL, CONDUIT MATERIAL AND INSTALLATION SHALL CONFORM TO UTILITY COMPANY STANDARDS AND PROJECT SPECIFICATIONS, WHICH EVER IS MORE STRINGENT.
- ADJUST ALL MANHOLES, CATCH BASINS, CURB BOXES, ETC. WITHIN LIMITS OF WORK TO FINISH GRADE.
- ALL UNDERGROUND CONDUITS SHALL HAVE NYLON PULL ROPES TO FACILITATE PULLING CABLES.
- THE CONTRACTOR SHALL OBTAIN, PAY FOR, AND COMPLY WITH ALL REQUIRED PERMITS, ARRANGE FOR ALL INSPECTIONS, AND SUBMIT COPIES OF ACCEPTANCE CERTIFICATES TO THE OWNER PRIOR TO COMPLETION OF THE PROJECT.
- THE CONTRACTOR SHALL PROVIDE AND INSTALL ALL BOXES, FITTINGS, CONNECTORS, COVER PLATES AND OTHER MISCELLANEOUS ITEMS NOT NECESSARILY DETAILED ON THE DRAWINGS TO RENDER INSTALLATION OF UTILITIES COMPLETE AND OPERATIONAL. AT NO EXTRA EXPENSE TO THE OWNER.
- A 10 FOOT MINIMUM EDGE TO EDGE HORIZONTAL SEPARATION SHALL BE PROVIDED BETWEEN ALL WATER AND SANITARY SEWER LINES. AN 18 INCH OUTSIDE TO OUTSIDE VERTICAL SEPARATION SHALL BE PROVIDED AT ALL WATER AND SANITARY SEWER CROSSINGS.
- THE CONTRACTOR SHALL PHASE UTILITY CONSTRUCTION AND PROVIDE TEMPORARY SERVICES AS REQUIRED TO PROVIDE CONTINUOUS SERVICE TO THE JOBSITE. TEMPORARY SERVICES SHALL COMPLY WITH ALL FEDERAL, STATE, LOCAL AND UTILITY COMPANY STANDARDS. COORDINATE ALL TEMPORARY SERVICES WITH UTILITY COMPANY, OWNER AND AFFECTED BUSINESSES.

**GRADING AND DRAINAGE NOTES:**

- ALL STORM DRAIN PIPE SHALL BE SMOOTH BORE INTERIOR PROVIDING A MANNINGS ROUGHNESS COEFFICIENT OF n = 0.013 OR LESS, UNLESS A SPECIFIC PIPE MATERIAL IS CALLED FOR ON THE CONTRACT DRAWINGS. CPP AND PVC PIPING SHALL NOT BE USED IN AREAS OF EXPOSED SUNLIGHT.
- ALL SLOPES STEEPER THAN 3:1 ARE TO RECEIVE RIPRAP SLOPE PROTECTION OR TURF REINFORCEMENT.
- THE CONTRACTOR SHALL EXERCISE EXTREME CAUTION DURING EARTHWORK OPERATIONS TO INSURE THAT THE STEEP SLOPE AREAS ARE NOT DISTURBED. THE LIMITS OF CLEARING SHALL BE 1' BEYOND THE GRADING LIMITS AS SHOWN ON THE SITE LAYOUT PLAN AND AS WELL AS ON THIS PLAN SHEET.
- THE CONTRACTOR IS HEREBY CAUTIONED THAT ALL SITE FEATURES SHOWN HERON ARE BASED ON FIELD OBSERVATIONS BY THE SURVEYOR AND BY INFORMATION PROVIDED BY UTILITY COMPANIES. THE INFORMATION IS NOT TO BE RELIED ON AS BEING EXACT OR COMPLETE. THE CONTRACTOR SHALL CONTACT DIG SAFE (1-888-DIGSAFE) AT LEAST THREE (3) BUT NOT MORE THAN THIRTY (30) DAYS PRIOR TO COMMENCEMENT OF EXCAVATION OR DEMOLITION TO VERIFY HORIZONTAL AND VERTICAL LOCATION OF ALL UTILITIES.
- ALL PAVEMENT JOINTS SHALL BE SAWCUT PRIOR TO PAVING TO PROVIDE A DURABLE AND UNIFORM JOINT.
- NO HOLES, TRENCHES OR STRUCTURES SHALL BE LEFT OPEN OVERNIGHT IN ANY EXCAVATION ACCESSIBLE TO THE PUBLIC OR IN PUBLIC RIGHTS-OF-WAY.
- THE CONTRACTOR SHALL TAKE FULL RESPONSIBILITY FOR ANY CHANGES AND DEVIATION OF APPROVED PLANS NOT AUTHORIZED BY THE ARCHITECT/ENGINEER AND/OR CLIENT/OWNER.
- CONTRACTOR SHALL INCORPORATE PROVISIONS AS NECESSARY IN CONSTRUCTION TO PROTECT EXISTING STRUCTURES, PHYSICAL FEATURES, AND MAINTAIN SITE STABILITY DURING CONSTRUCTION. CONTRACTOR SHALL RESTORE ALL AREAS TO ORIGINAL CONDITION AND AS DIRECTED BY DESIGN DRAWINGS.
- CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND CONDITIONS IN THE FIELD PRIOR TO FABRICATION AND ERECTION OF ANY MATERIAL. ANY UNUSUAL CONDITIONS SHALL BE REPORTED TO THE ATTENTION OF THE ENGINEER.
- EXTERIOR GRADES AROUND PROPOSED STRUCTURES SHALL BE COORDINATED WITH FINAL BUILDING PLANS AND PROVIDE FOR ALL ACCESS OPENINGS INCLUDING MANDOORS, OVERHEAD DOORS AND LOADING DOCKS.

**EROSION CONTROL NOTES:**

- LAND DISTURBING ACTIVITIES SHALL BE ACCOMPLISHED IN A MANNER AND SEQUENCE THAT CAUSES THE LEAST PRACTICAL DISTURBANCE OF THE SITE.
- PRIOR TO BEGINNING ANY CLEARING/LAND DISTURBING ACTIVITIES, THE CONTRACTOR SHALL INSTALL THE PERIMETER SILT FENCES AND THE STABILIZED CONSTRUCTION ENTRANCES.
- ALL GROUND AREAS DISTURBED DURING CONSTRUCTION WILL BE GRADED, LOAMED AND SEEDED AS SOON AS POSSIBLE.
- SILT BARRIERS SHALL BE INSPECTED, REPAIRED AND CLEANED AS NOTED IN THE EROSION CONTROL NOTES SHOWN ON THE EROSION CONTROL DETAIL SHEET.
- THE CONTRACTOR SHALL REPAIR AND ADD STONE TO THE CONSTRUCTION ENTRANCES AS THEY BECOME SATURATED WITH MUD TO ENSURE THAT THEY WORK AS PLANNED DURING CONSTRUCTION AND SHALL KEEP RIVERSIDE STREET CLEAR OF DIRT AND MUD.
- SILT REMOVED FROM AROUND INLETS AND BEHIND THE SILT FENCES SHALL BE PLACED ON A TOPSOIL STOCKPILE AND MIXED INTO IT FOR LATER USE IN LANDSCAPING OPERATIONS.
- CONTRACTORS SHALL NOTIFY OPERATORS WHO MAINTAIN UNDERGROUND UTILITIES IN THE AREA OF PROPOSED EXCAVATION OR BLASTING AT LEAST THREE (3) BUT NOT MORE THAN (30) DAYS PRIOR TO COMMENCEMENT OF EXCAVATION OR DEMOLITION. CONTRACTORS SHALL BE RESPONSIBLE FOR COMPLIANCE WITH THE REQUIREMENTS OF 23 MRSA 3360-A.
- CONTRACTOR SHALL PROVIDE AND INSTALL ALL NECESSARY ELECTRICAL SERVICES IN CONDUIT TO SIGHT LIGHTING, COMPLYING WITH APPLICABLE CODES. COORDINATE WITH OWNER AND ARCHITECTURAL AND CMP PLANS. PRIOR TO CONSTRUCTION, CONTRACTOR SHALL CONFIRM WITH CMP, CABLE AND TELEPHONE COMPANIES INDIVIDUAL UTILITY REQUIREMENTS FOR INSTALLATION AND LOCATIONS OF UTILITIES.
- CONTRACTOR SHALL OBTAIN ALL REQUIRED PERMITS PRIOR TO CONSTRUCTION.
- FILL AREAS UNDER PAVEMENT SHALL BE GRANULAR BORROW. ALL OTHER FILL AREAS SHALL BE A COMMON BORROW MATERIAL SUITABLE FOR EMBANKMENT CONSTRUCTION, FREE FROM FROZEN MATERIAL, PERISHABLE RUBBLE, PEAT, ORGANICS, ROCKS LARGER THAN 12" IN DIAMETER, VEGETATION AND OTHER MATERIAL UNSUITABLE FOR ROADWAY AND SUBGRADE CONSTRUCTION. EXCAVATED ON-SITE MATERIALS MAY BE USED FOR FILL PROVIDED THE MATERIAL IS FREE FROM UNSUITABLE MATERIAL DESCRIBED IN THIS NOTE AND UPON APPROVAL OF THE ENGINEER GRANULAR BORROW AND COMMON BORROW SHALL COMPLY WITH THE MDOT SPECIFICATIONS.
- ALL FILLS SHALL BE PLACED LAYERS NOT MORE THAN 12" LOOSE DEPTH AND COMPACTED BY HEAVY COMPACTION EQUIPMENT. MINIMUM COMPACTION SHALL BE 95% OF MAXIMUM DENSITY ASTM 1557, MODIFIED AND FIELD DENSITY ASTM D2922 (NUCLEAR METHODS).
- IMMEDIATELY UPON COMPLETION OF CUTS/FILLS, THE CONTRACTOR SHALL STABILIZE DISTURBED AREAS IN ACCORDANCE WITH EROSION CONTROL NOTES AS SPECIFIED ON PLANS.
- ALL EROSION AND SEDIMENT CONTROL MEASURES SHALL BE INSTALLED IN ACCORDANCE WITH "MAINE EROSION AND SEDIMENTATION CONTROL HANDBOOK FOR CONSTRUCTION: BEST MANAGEMENT PRACTICES" PUBLISHED BY THE CUMBERLAND COUNTY SOIL AND WATER CONSERVATION DISTRICT AND MAINE DEPARTMENT OF ENVIRONMENTAL PROTECTION, MARCH 1991 OR LATEST EDITION. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO POSSESS A COPY OF THE EROSION CONTROL PLAN AT ALL TIMES.

			PROJECT UNIT 11 - IMMUCELL SECOND TEE CONDOMINIUM ASSOCIATION BUSINESS PARK EXPANSION	<b>STANTEC CONSULTING SERVICES INC.</b> 482 PAYNE ROAD SCARBOROUGH, ME 04074 WWW.STANTEC.COM 
SHEET TITLE <b>GENERAL NOTES</b>			DRAWN: DED      DATE: MAY 2015 DESIGNED: SRB      SCALE: N.T.S. CHECKED: SRB      JOB NO. SP-M164/195350148	
CLIENT <b>IMMUCELL CORP.</b>			FILE NAME: SP-M168 GENERAL NOTES SHEET <b>C-2</b>	
5 08.03.16 RELEASED FOR BIDDING 4 07.27.16 REVISED SUBMISSION TO CITY 3 12.09.15 RELEASED FOR CONSTRUCTION - FINAL PLANS TO CITY 2 07.17.15 REVISED SUBMISSION TO CITY 1 06.12.15 AMENDED SITE PLAN SUBMISSION	REV DATE DESCRIPTION	P.E. STEPHEN BUSHEY LIC. #7429		