




509 Warren Ave Portland, ME 04103

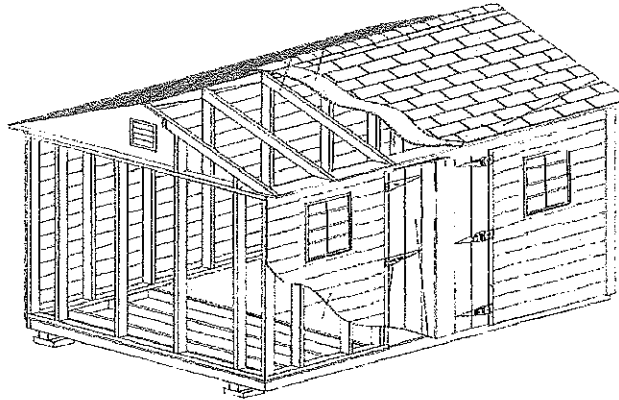

[WWW.ShedHappens.com](http://WWW.ShedHappens.com) 207-892-3636 Mike@ShedHappens.com

#### Shed Happens, Inc. shed specifications.

- 4"x4" Pressure Treated Skids
- 2"x4"x6' and 8' Pressure Treated Floor Joists & Plates
- 2"x6"x10' + Pressure Treated Floor Joists & Plates
- ¾" LP Shed ProStruct Tongue and Groove Flooring
- 2"x4" x6' wall studs spaced 16" On Center
- Metal Wall bracing in all pine board sheds
- 2"x4" rafters spaced 16" On Center
- Collar ties on 10' wide+ sheds 4' On Center
- 7/16" LP Roof and Wall Sheathing
- 35 year Architectural Asphalt Roof Shingles
- Aluminum Drip edge on all rakes and eaves
- 12" Acorn Door Hinges "Black"
- 8"x8" square aluminum gable venting standard