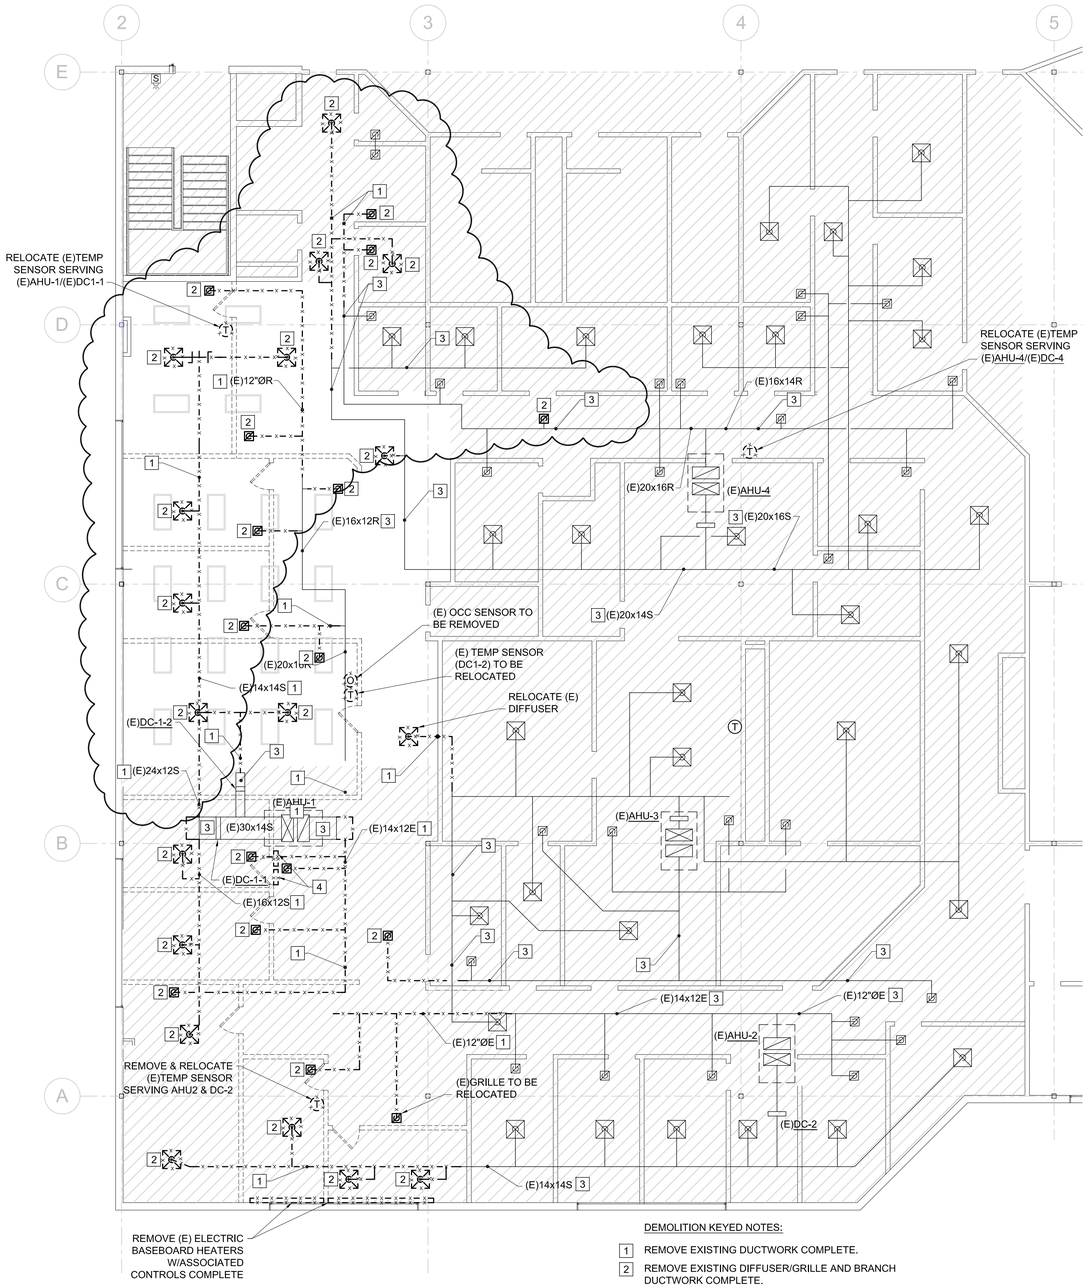

DEMOLITION KEYED NOTES:

1. REMOVE EXISTING DUCTWORK COMPLETE.
2. REMOVE EXISTING DIFFUSER/GRILLE AND BRANCH DUCTWORK COMPLETE.
3. EXISTING DUCTWORK TO REMAIN.
4. (E)CONTROLLERS SERVING (E)AHU-1/(E)DC 1-2 (ABOVE CEILING) TO BE RELOCATED AS REQUIRED TO FACILITATE THE RENOVATIONS

A1	MECHANICAL DEMOLITION THIRD FLOOR PLAN
1/8" = 1'-0"	

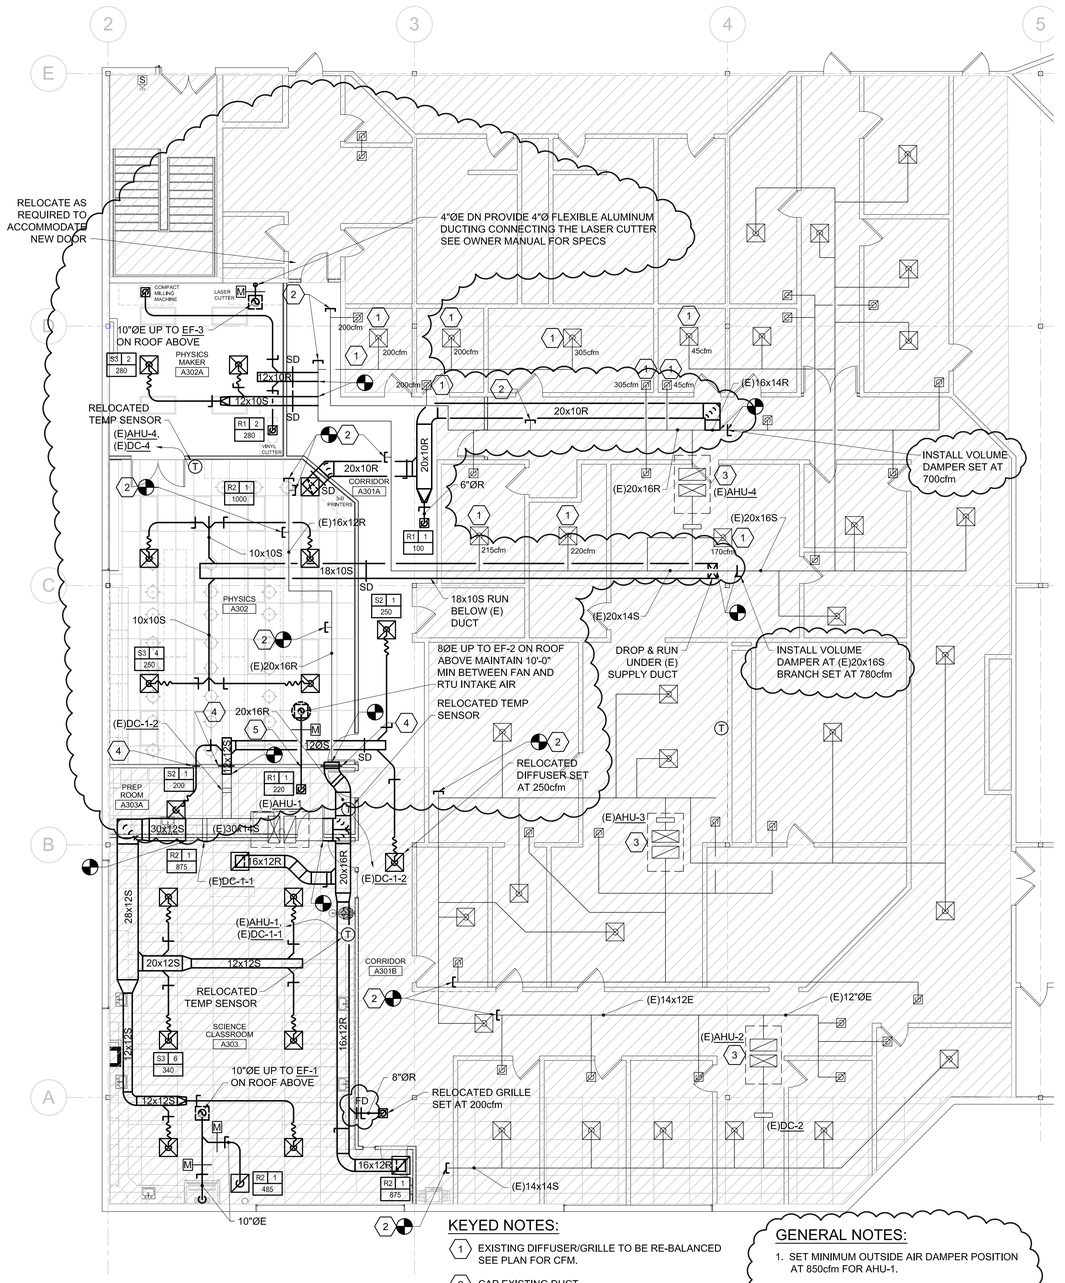

KEYED NOTES:

1. EXISTING DIFFUSER/GRILLE TO BE RE-BALANCED SEE PLAN FOR CFM.
2. CAP EXISTING DUCT.
3. RE-BALANCE (E)AHU SYSTEM TO ACCOMMODATE REMOVAL OF SUPPLY AND RETURN TERMINALS AS OUTLINED ON THE DEMOLITION PLAN.
4. FIRE DAMPERS UNDER CHANGE ORDER REQUEST CP006.
5. FIRE DAMPER NOT REQUIRED IF THERE IS NO FLEX DUCT USED.

GENERAL NOTES:

1. SET MINIMUM OUTSIDE AIR DAMPER POSITION AT 850cfm FOR AHU-1.
2. SET MINIMUM OUTSIDE AIR DAMPER POSITION AT 1310cfm FOR AHU-4.
3. WORK COMPONENTS NEED TO COMPLY WITH THE SPEC SECTIONS IN THE ORIGINAL CONTRACT DOCUMENTS.
4. UNLESS OTHERWISE NOTED OR INCLUDED HEREIN, ALL WORK ASSOCIATED WITH THIS CHANGE PROPOSAL SHALL COMPLY WITH SPECIFICATIONS AS ISSUED WITH THE CONSTRUCTION DOCUMENTS.

A6	MECHANICAL THIRD FLOOR PLAN
1/8" = 1'-0"	

PDT ARCHITECTS
49 DARTMOUTH STREET
PORTLAND, MAINE 04101
207-775-1059
www.pdtarchs.com

COPYRIGHT 2014
PDT Architects
Reuse or reproduction of the contents of this document is not permitted without written permission of PDT Architects.

Allied Engineering
Structural Mechanical Electrical Commissioning
160 Veranda Street
Portland, Maine 04103
T: 207.221.2260
F: 207.221.2266
Web: www.allied-eng.com

allied Project No: 14-024
CAD File: 14024_M

Minor Interior Renovations at
CASCO BAY HIGH SCHOOL Phase I Part B
196 Allen Avenue, Portland, Maine

NORTH

JOB NO.
14036

DRWN. SCL CHK ASD

SCALE:
As indicated

ISSUE STATUS

TITLE
PHASE 1 PART B
MECHANICAL
DEMOLITION PLAN
MECHANICAL PLAN

SHEET
MH-101

PROPOSAL REQUEST #2 ~ 27 OCTOBER 2014 ~ NOT FOR CONSTRUCTION

N:\Projects\2014\14024 ~ CBHS Chemistry Room and Assembly Space Renovations\00 Drawing Files\14024_M.dwg Oct 29, 2014 - 4:45pm