

DOOR, DOOR FRAME AND HARDWARE SCHEDULE

DOOR NO.	ROOM NO.	HARDWARE SET NO.	DOOR			FRAME						FIRE RATING (MINUTES)	REMARKS	
			SIZE (WIDTH x HEIGHT x DEPTH)	MAT	FINISH	TYPE	MAT	FINISH	TYPE	HEAD DETAIL	JAMB DETAIL			SILL DETAIL
GROUND FLOOR DOORS														
006	006	SET 5	EX.											2
019A	019	SET 2A	3'-0" x 7'-2" x 1 3/4"	WD	CLEAR	NVL	HM	PT	1	G2/A8.01	G4/A8.01	-		45 MIN.
019B	019	SET 2A	3'-0" x 7'-2" x 1 3/4"	WD	CLEAR	NVL	HM	PT	1	G2/A8.01	G4/A8.01	-		
FIRST FLOOR DOORS														
101	101	SET 6	EX.						EX.					4
102	102	SET 6	EX.						EX.					4
105	105	SET 5	EX.						EX.					2
124	124	SET 3	3'-0" x 7'-2" x 1 3/4"	WD	CLEAR	HG	HM	PT	3	C2/A8.01	C4/A8.01	-		
126	126	SET 3	3'-0" x 7'-2" x 1 3/4"	WD	CLEAR	HG	HM	PT	3	C2/A8.01	C4/A8.01	-		
150A	150	SET 7	(2)3'-0" x 7'-0" x 1 3/4"	ALUM	DRKBRZ	2FG	ALUM	DRKBRZ	-	G2/A8.01	G4/A8.01	-		6
150B	150	SET 7	(2)3'-0" x 7'-0" x 1 3/4"	ALUM	DRKBRZ	2FG	ALUM	DRKBRZ	-	-	-	-		6

REMARKS:

- NOT USED
- REMOVE AND REPLACE EXISTING LOCK CYLINDER. KEY ALL JANITOR'S CLOSETS ALIKE.
- NOT USED
- MODIFY EXISTING DOOR AND FRAME AS REQUIRED TO INSTALL CARD ACCESS CONTROL - CARD SWIPE.
- PROVIDE CASSED OPENING - FRAME ONLY.
- WIDE STYLE ALUMINUM STOREFRONT DOOR UNIT SET IN ALUMINUM CURTAIN WALL ASSEMBLY.

DOOR, DOOR FRAME AND HARDWARE SCHEDULE

DOOR NO.	ROOM NO.	HARDWARE SET NO.	DOOR			FRAME						FIRE RATING (MINUTES)	REMARKS	
			SIZE (WIDTH x HEIGHT x DEPTH)	MAT	FINISH	TYPE	MAT	FINISH	TYPE	HEAD DETAIL	JAMB DETAIL			SILL DETAIL
SECOND FLOOR DOORS														
206	206	SET 1	3'-0" x 7'-2" x 1 3/4"	WD	CLEAR	F	HM	PT	1	C2/A8.01	C4/A8.01	-		45 MIN.
207	207	SET 1	3'-0" x 7'-2" x 1 3/4"	WD	CLEAR	F	HM	PT	1	C2/A8.01	C4/A8.01	-		45 MIN.
209	209	SET 5	EX.						EX.					2
220	220	SET 4	3'-0" x 7'-2" x 1 3/4"	WD	CLEAR	F	HM	PT	1	G2/A8.01	G4/A8.01	-		
221	221	SET 3	3'-0" x 7'-2" x 1 3/4"	WD	CLEAR	HG	HM	PT	3	G2/A8.01	G4/A8.01	-		
222	222	SET 3	3'-0" x 7'-2" x 1 3/4"	WD	CLEAR	HG	HM	PT	3	G2/A8.01	G4/A8.01	-		
223	223	SET 3	3'-0" x 7'-2" x 1 3/4"	WD	CLEAR	HG	HM	PT	3	G2/A8.01	G4/A8.01	-		
224	224	SET 3	3'-0" x 7'-2" x 1 3/4"	WD	CLEAR	HG	HM	PT	3	G2/A8.01	G4/A8.01	-		
225	225	SET 3	3'-0" x 7'-2" x 1 3/4"	WD	CLEAR	HG	HM	PT	3	G2/A8.01	G4/A8.01	-		
226	226	SET 3	3'-0" x 7'-2" x 1 3/4"	WD	CLEAR	HG	HM	PT	3	G2/A8.01	G4/A8.01	-		
227	227	SET 3	3'-0" x 7'-2" x 1 3/4"	WD	CLEAR	HG	HM	PT	3	G2/A8.01	G4/A8.01	-		
228	228	SET 3	3'-0" x 7'-2" x 1 3/4"	WD	CLEAR	HG	HM	PT	3	G2/A8.01	G4/A8.01	-		
230	230	SET 3	3'-0" x 7'-2" x 1 3/4"	WD	CLEAR	HG	HM	PT	3	G2/A8.01	G4/A8.01	-		
245	245	SET 3	3'-0" x 7'-2" x 1 3/4"	WD	CLEAR	HG	HM	PT	3	C2/A8.01	C4/A8.01	-		
247	247	SET 3	3'-0" x 7'-2" x 1 3/4"	WD	CLEAR	HG	HM	PT	3	C2/A8.01	C4/A8.01	-		
249	249	SET 2	3'-0" x 7'-2" x 1 3/4"	WD	CLEAR	HG	HM	PT	3	C2/A8.01	C4/A8.01	-		
260	260		3'-0" x 7'-2" x 1 3/4"				HM	PT	2	C2/A8.01(SIM)	C4/A8.01(SIM)	-		5



GENERAL NOTES:

- PAINT FINISH ALL EXISTING HOLLOW METAL DOOR FRAMES THROUGHOUT THE FACILITY.
- PAINT FINISH ALL EXISTING HOLLOW METAL DOOR SLABS THROUGHOUT THE FACILITY.

DOOR SCHEDULE ABBREVIATIONS:

- AD = AUTOMATIC DOOR OPERATOR
- ALUM = ALUMINUM
- DRKBRZ = DARK BRONZE ANODIZED
- F = FLUSH
- FG = FULL GLASS
- HG = HALF GLASS
- HM = HOLLOW METAL
- ST = GALVANIZED STEEL
- INSTL = INSULATED STEEL
- NVL = NARROW VISION LIGHT
- OHD = OVERHEAD DOOR
- PT = PAINT FINISH
- REL = EXISTING RELOCATED DOOR OR FRAME
- TEMP = TEMPERED
- WD = SOLID CORE WOOD

PROJECT NORTH

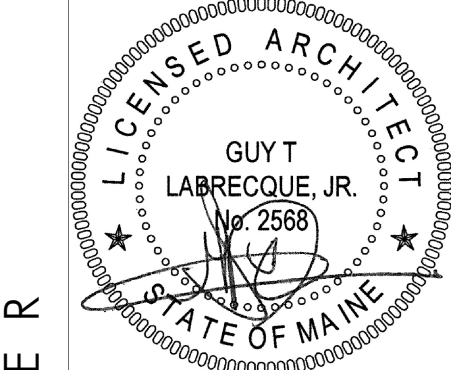

CWS ARCHITECTS
ARCHITECTURE | INTERIOR DESIGN
264 US ROUTE ONE
BOX 6, SUITE 100-2A
SCARBOROUGH, MAINE 04074
T: 207-774-4441
WWW.CWSARCH.COM

OWNER
FAIRPOINT COMMUNICATIONS
1 DAVIS ROAD
PORTLAND ME 04101

PROJECT
5 DAVIS FARM ROAD MERGER
5 DAVIS FARM ROAD
PORTLAND ME 04103

DRAWING
DOOR, DOOR FRAME AND HARDWARE SCHEDULE
CWS PROJECT NUMBER: 17048

REVISIONS					

DRAWING NUMBER
A8.00

SCALE: AS NOTED
DATE: 1-2-2018