DEMOLITION NOTES:

1. ALL ELECTRICAL WORK FOR THIS PROJECT TO COMPLY WITH MOST CURRENT NEC (NATIONAL ELECTRICAL CODE) INCLUDING NEW WIRING AND CONNECTION TO EXISTING PANELS.

2. G.C. AND PROJECT MANAGER TO VERIFY ALL PROPOSED WORK AND MEASUREMENTS PRIOR TO CONSTRUCTION OR DEMOLITION.

3. REVIEW ENTIRE SET OF PLANS WITH PROJECT MANAGER BEFORE BEGINNING CONSTRUCTION. ANY ELECTRICAL THAT WILL NOT BE USED AFTER RENOVATIONS WILL BE REMOVED/CAPPED OFF AS NEEDED. PROJECT MANAGER TO SEE DEMOLITION THROUGH.

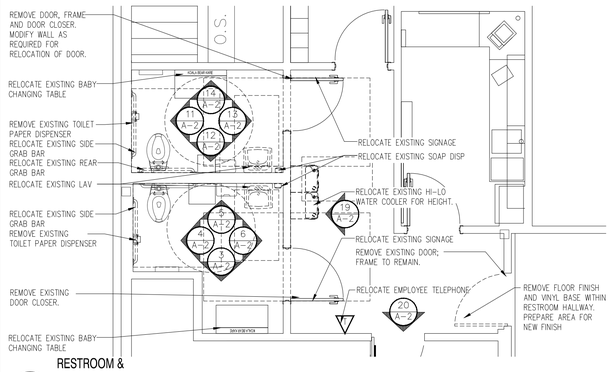

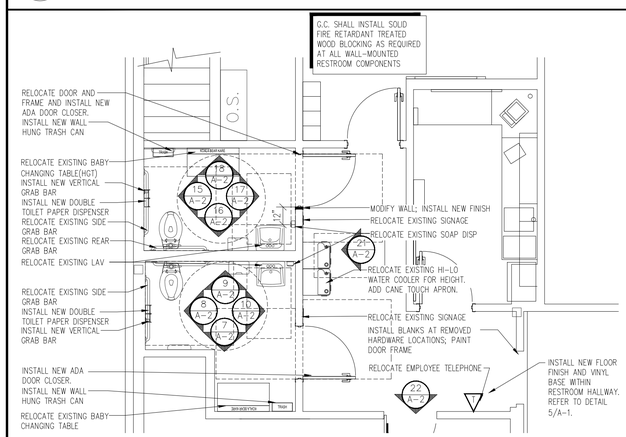

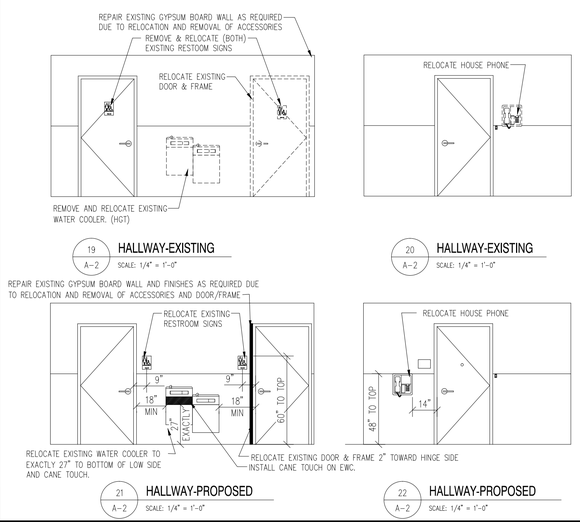

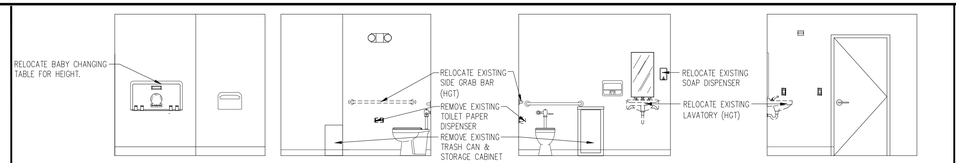

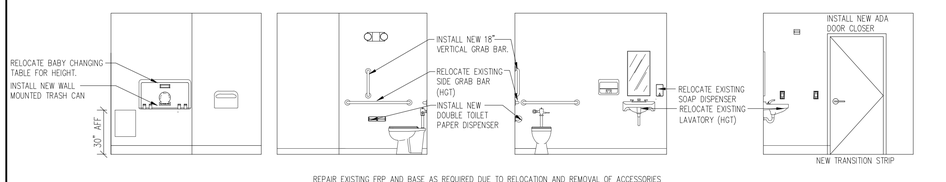

NOTE:
1. REFER TO MOUNTING HEIGHT DETAILS FOR SPECIFIC DIMENSIONAL INFORMATION
2. G.C. SHALL INSTALL SOLID FIRE RETARDANT TREATED WOOD BLOCKING AS REQUIRED AT ALL WALL-MOUNTED RESTROOM COMPONENTS

DOOR ADJUSTMENT NOTES

(INTERIOR DOORS)
- CLOSING SPEED SHALL BE 5 SECONDS MIN FROM AN OPEN POSITION OF 90 DEGREES TO A POSITION OF 12 DEGREES FROM THE LATCH.
- **MAXIMUM FORCE TO OPEN SHALL BE 5 LBS** (DOES NOT APPLY TO FIRE DOORS)
- **IF CLOSER CAN NOT BE ADJUSTED INSTALL NEW CLOSER DORMA 8616 ARP SNB1**

TOILET ROOM ACCESSORY SCHEDULE (NOT ALL USED)	
ITEM	DESCRIPTION(OR APPROVED EQUAL)
TOILET TISSUE DISPENSER	BRADEX 5126
RESTROOM SIGNS WAYFINDING SIGNS	GC SHALL ORDER ALL ADA SIGNAGE THROUGH CVS RPMSA PROGRAM SPECIALIST (SOS) MIN 5 WEEKS PRIOR TO CONSTRUCTION
18" VERTICAL GRAB BAR 36" GRAB BAR 42" GRAB BAR	BRADLEY 8120-001180 BRADLEY 8120-001360 BRADLEY 8120-001420
RECESSED WASTE RECEPTACLE	BRADLEY 3251
WALL-MOUNTED WASTE RECEPTACLE	BOBRICK B-279
SOAP DISPENSER	GRAINGER 5W626
TOILET SEAT COVER DISPENSER	GRAINGER 2VEX8 (WHITE) GRAINGER 2VEX9 (GRAY)
HAND DRYER	BRADLEY ADJUSTABLE SPEED WARM AIR HAND DRYER (BRADEX MODEL# 2902-280000)
ADA DOOR CLOSER (FROM DH PACE)	DORMA 8616 ARP SNB1
BREAKROOM PINPAD LOCK (FROM DH PACE)	B-AU-e4761LNx7-PINXL0626
EMPLOYEE COAT RACK	ORDERED BY GC THRU MILLWORK VENDOR

NOTE:
1. **REFER TO MOUNTING HEIGHT DETAILS ON DWG 23/A-2 FOR SPECIFIC DIMENSIONAL INFORMATION**
2. G.C. SHALL INSTALL SOLID FIRE RETARDANT TREATED WOOD BLOCKING AS REQUIRED AT ALL WALL-MOUNTED RESTROOM COMPONENTS
3. REPAIR/REPLACE DAMAGED WALL/FLOOR FINISHES AS REQUIRED DUE TO FIXTURE/ACCESSORY REMOVAL/RELOCATION; MATCH EXISTING

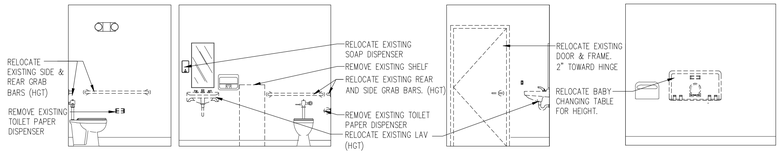

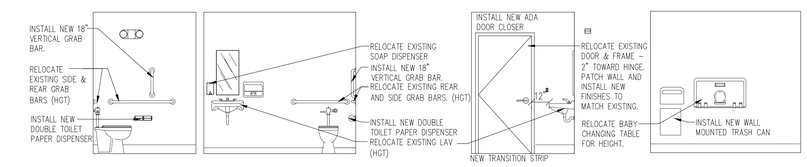

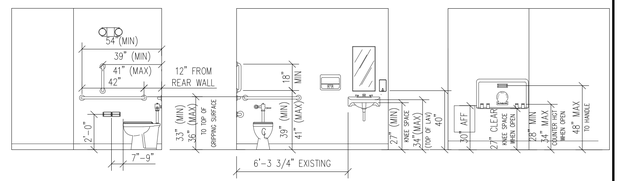

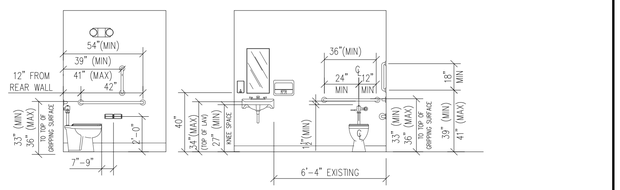

SIGNAGE NOTES

RAISED AND BRAILLED CHARACTERS AND PICTORIAL SYMBOL SIGNS (PICTOGRAMS).
LETTERS AND NUMERALS SHALL BE RAISED 1/32", UPPER CASE, SANS SERIF TYPE AND SHALL BE ACCOMPANIED WITH GRADE 2 BRAILLE. RAISED CHARACTERS SHALL BE AT LEAST 5/8" HIGH, BUT NO HIGHER THAN 2". PICTOGRAMS ON ADA RESTROOM SIGNS SHALL BE ACCOMPANIED BY THE EQUIVALENT VERBAL DESCRIPTION PLACED DIRECTLY BELOW THE PICTOGRAM. THE BORDER DIMENSION OF THE PICTOGRAM SHALL BE 6" MINIMUM IN HEIGHT.

FINISH AND CONTRAST.
THE CHARACTERS AND BACKGROUND OF ADA RESTROOM SIGNS SHALL BE OF NON-GLARE FINISH. CHARACTERS AND SYMBOLS SHALL HAVE CONTRAST WITH THE BACKGROUND.- EITHER LIGHT CHARACTERS ON A DARK BACKGROUND OR DARK CHARACTERS ON A LIGHT BACKGROUND.

MOUNTING LOCATION AND HEIGHT
WHERE PERMANENT IDENTIFICATION IS PROVIDED FOR RESTROOMS AND SPACES, SIGNS SHALL BE INSTALLED ON THE WALL ADJACENT TO THE LATCH SIDE OF THE DOOR, AT DOUBLE LEAF DOORS SIGNS SHALL BE PLACED ON THE NEAREST ADJACENT WALL. MOUNTING LOCATION SHALL BE 48" MIN TO THE BOTTOM OF THE LOWEST TACTILE CHARACTER AND 60" MAX TO THE BOTTOM OF THE HIGHEST TACTILE CHARACTER. MOUNTING LOCATION FOR SUCH SIGNAGE SHALL BE SO THAT A PERSON MAY APPROACH WITHIN 3 IN. OF SIGNAGE WITHOUT ENCOUNTERING PROTRUDING OBJECTS OR STANDING WITHIN THE SWING OF DOOR (18" X 18" OF CLEAR SPACE CENTERED ON THE TACTILE CHARACTERS). SIGNS WITH TACTILE CHARACTERS ARE PERMITTED ON THE PUSH SIDE OF DOORS WITH CLOSERS AND WITHOUT HOLD-OPEN DEVICES.

SYMBOLS OF ACCESSIBILITY
FACILITIES AND ELEMENTS REQUIRED TO BE IDENTIFIED AS ACCESSIBLE SHALL USE THE INTERNATIONAL SYMBOL OF ACCESSIBILITY.

GENERAL NOTES:

- G.C. TO PROVIDE ALL TEMPORARY BRACING.
- CLEAN AND PREPARE SUBFLOORS TO RECEIVE NEW FINISH.
- ALL WALLS SCHEDULED TO REMAIN THAT ARE DAMAGED UNDER THIS SCOPE OF WORK SHALL BE PATCHED AND PAINTED TO MATCH EXIST. COORD WITH PM.
- INSTALL PAINT/ WALL COVERING ON NEW WALLS TO MATCH EXIST ADJACENT WALLS.
- PROVIDE WOOD BLOCKING IN WALLS @ SINKS, GRAB BARS & COAT HOOKS.
- ALL WORK PERFORMED IN ACCORDANCE W/ ALL LOCAL & STATE BUILDING CODES.
- GENERAL CONTRACTOR RESPONSIBLE TO UNLOAD ALL DELIVERIES TO JOB SITE & REMOVAL OF ALL DEBRIS CAUSED BY THEIR WORK.

NOTE:
ALL DRYWALL JOINTS SHALL BE TAPED WITH A MINIMUM OF TWO COATS OF JOINT COMPOUND. ALL COMPOUND JOINTS ARE TO BE WET-SANDED ONLY.

ALL NEW WOOD INSTALLED THROUGHOUT THIS PROJECT SHALL BE FIRE-RETARDANT.

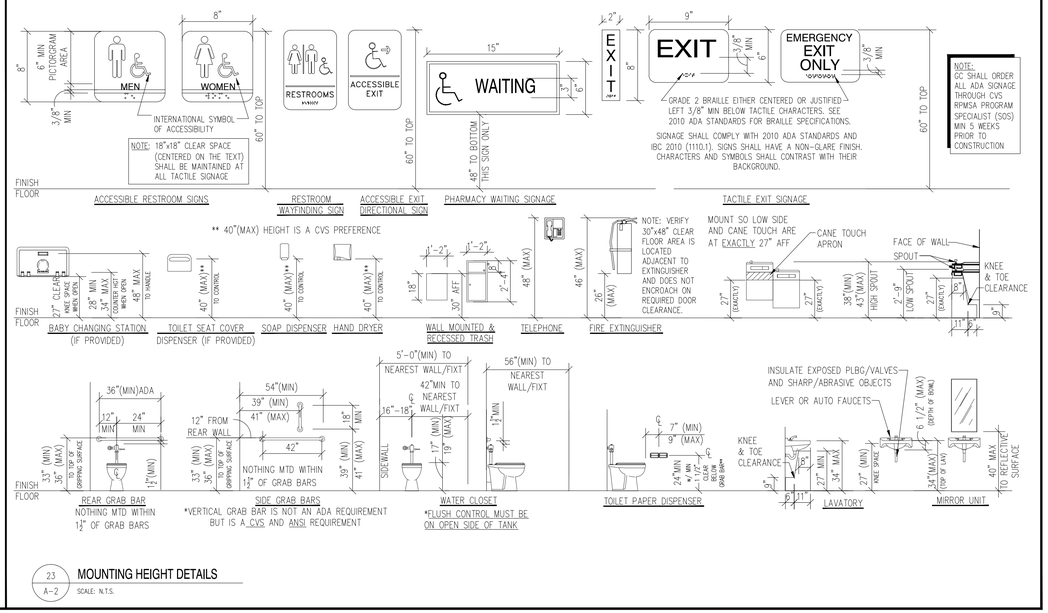

CVS pharmacy®

STORE NUMBER: 0329
111 AUBURN STREET
PORTLAND, ME
PROJECT TYPE: SP/ADA
DEAL TYPE:

CS PROJECT NUMBER: 078900
CAP CODE NUMBER: 00089

WILLIAM STARCK ARCHITECTS, INC.
126 COVE STREET
FALL RIVER, MASSACHUSETTS 02720
TEL. 508.679.5733
FAX: 508.672.8556
E-MAIL: STARCK@STARCKARCHITECTS.COM
WEBSITE: WWW.STARCKARCHITECTS.COM

SEAL:

CONSULTANT:

REVISIONS:

PROJECT MANAGER:	MHA
LAYOUT COORD.	RMA
PROJECT ARCHITECT:	WSA
PLANNING MGR.	CD
DRAWING BY:	PP
DATE:	01/31/14
DRAWING SCALE:	AS NOTED

TITLE: RESTROOM & HALLWAY PLANS & ELEVATIONS

SHEET NUMBER: A-2

COMMENTS: CONSTRUCTION DRAWINGS