

Asphalt Shingles (Per Contract Specs)

7/16 OSB Roof Sheathing

2x12 RidgeBroad

2x10 Rafters @ 16 o.c.

2x6 Collar ties @ 16 o.c.

R-41 Blown Insulation (flat Ceiling)

Slopped Ceilings

Propper Vent

R-30 H.D. Unfaced

W/ 1" R-6.5 Ridged Insulation

12" Overhand

W/Vened Soffit

Blockers & Runners R-21

Typical 2x6 Exterior Wall

Vinyl Siding





House Wrap

7/16 OSB Sheathing

2x6 Studs @ 16 o.c.

R-21 Unfaced Insulation

4 Mil. Poly V.B.

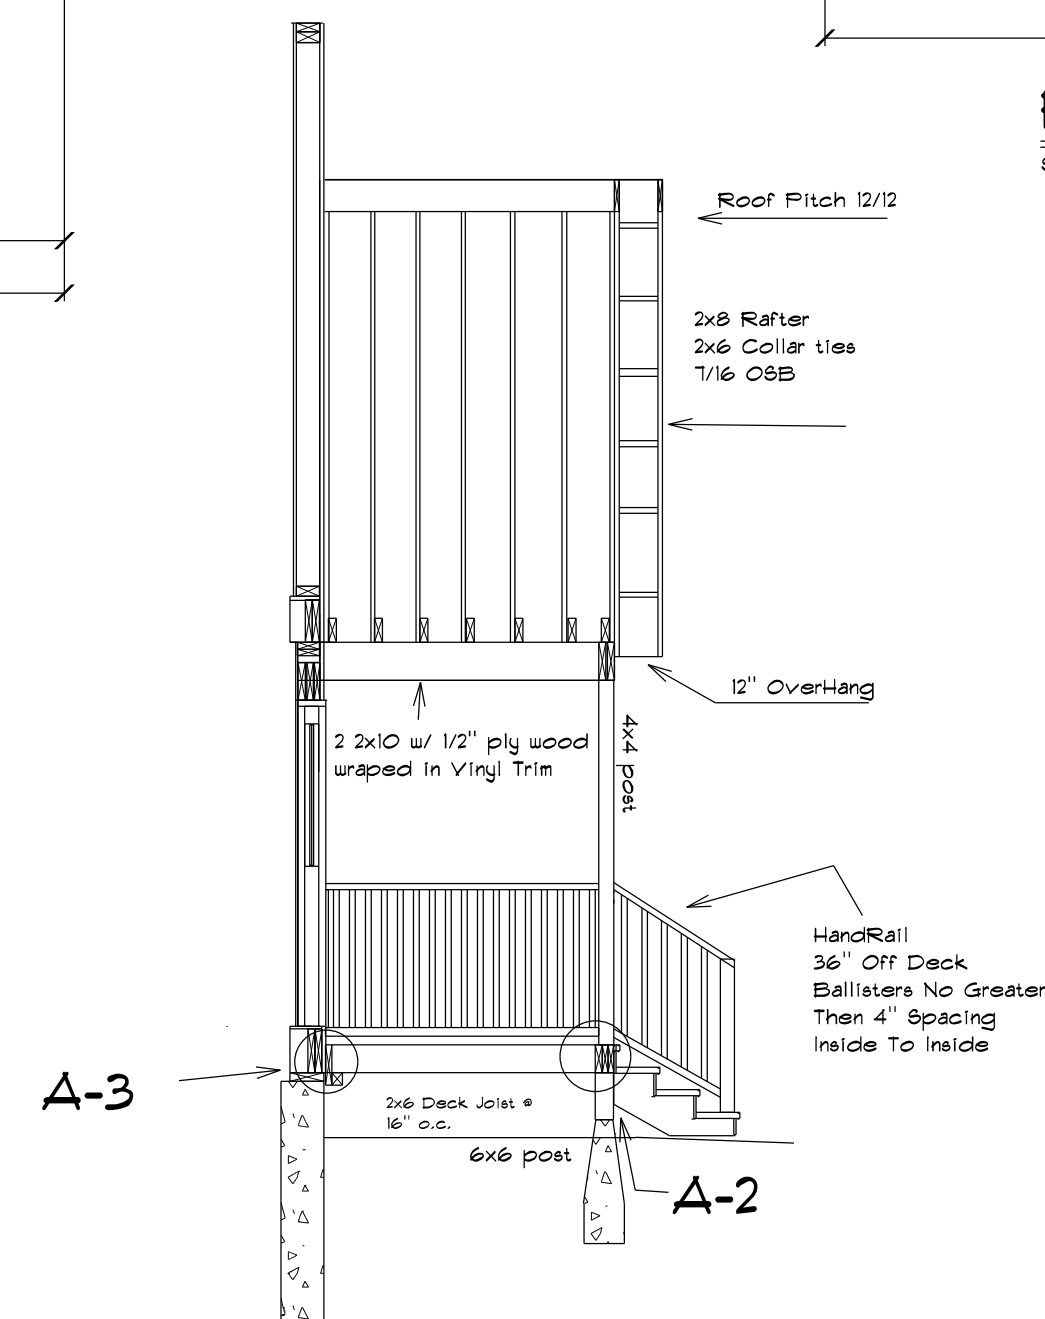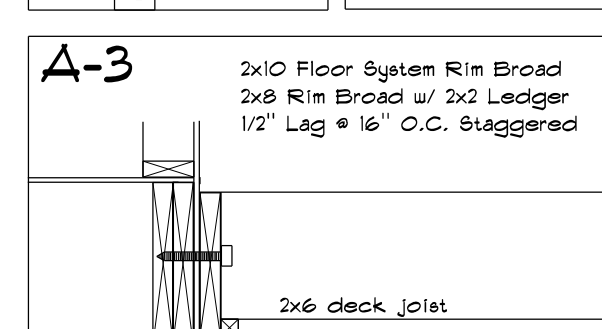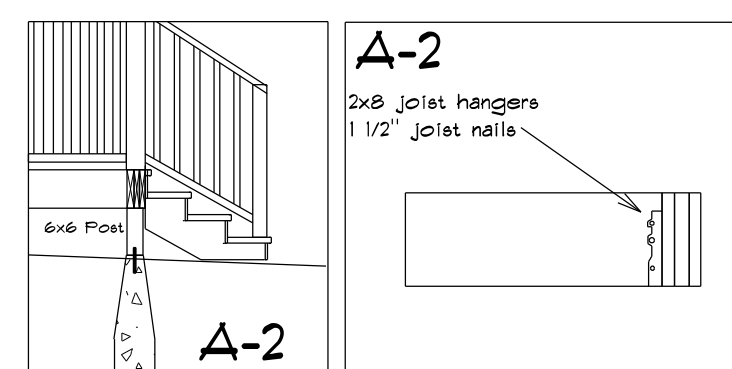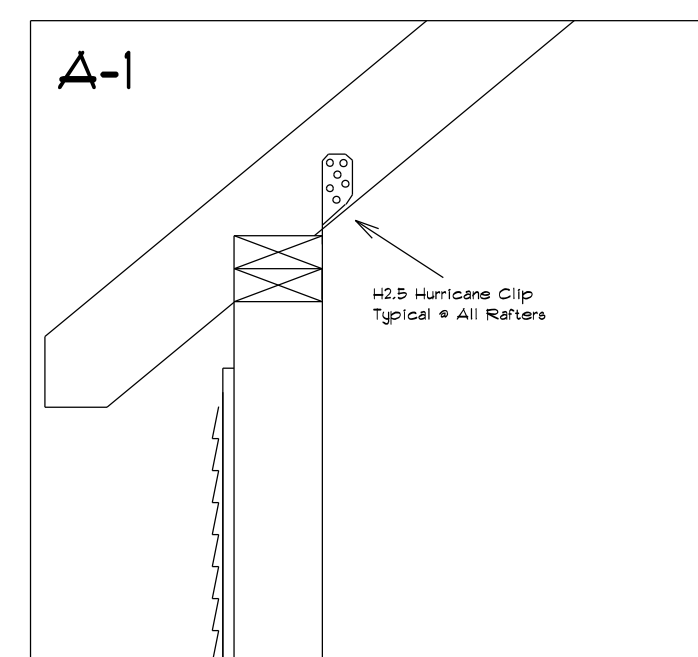

Header Schedule @ Exterior Walls

3. 2x6 Opening up 3' 0"

3-2x6 Opening up 3-
3-2x8 3' 1" to 4' 6"


3-2x8 3-1 to 4-6

3-2x10 4'-6" to 6'-0"

CROSS SECTION

254 Sumac St.

Portland Maine

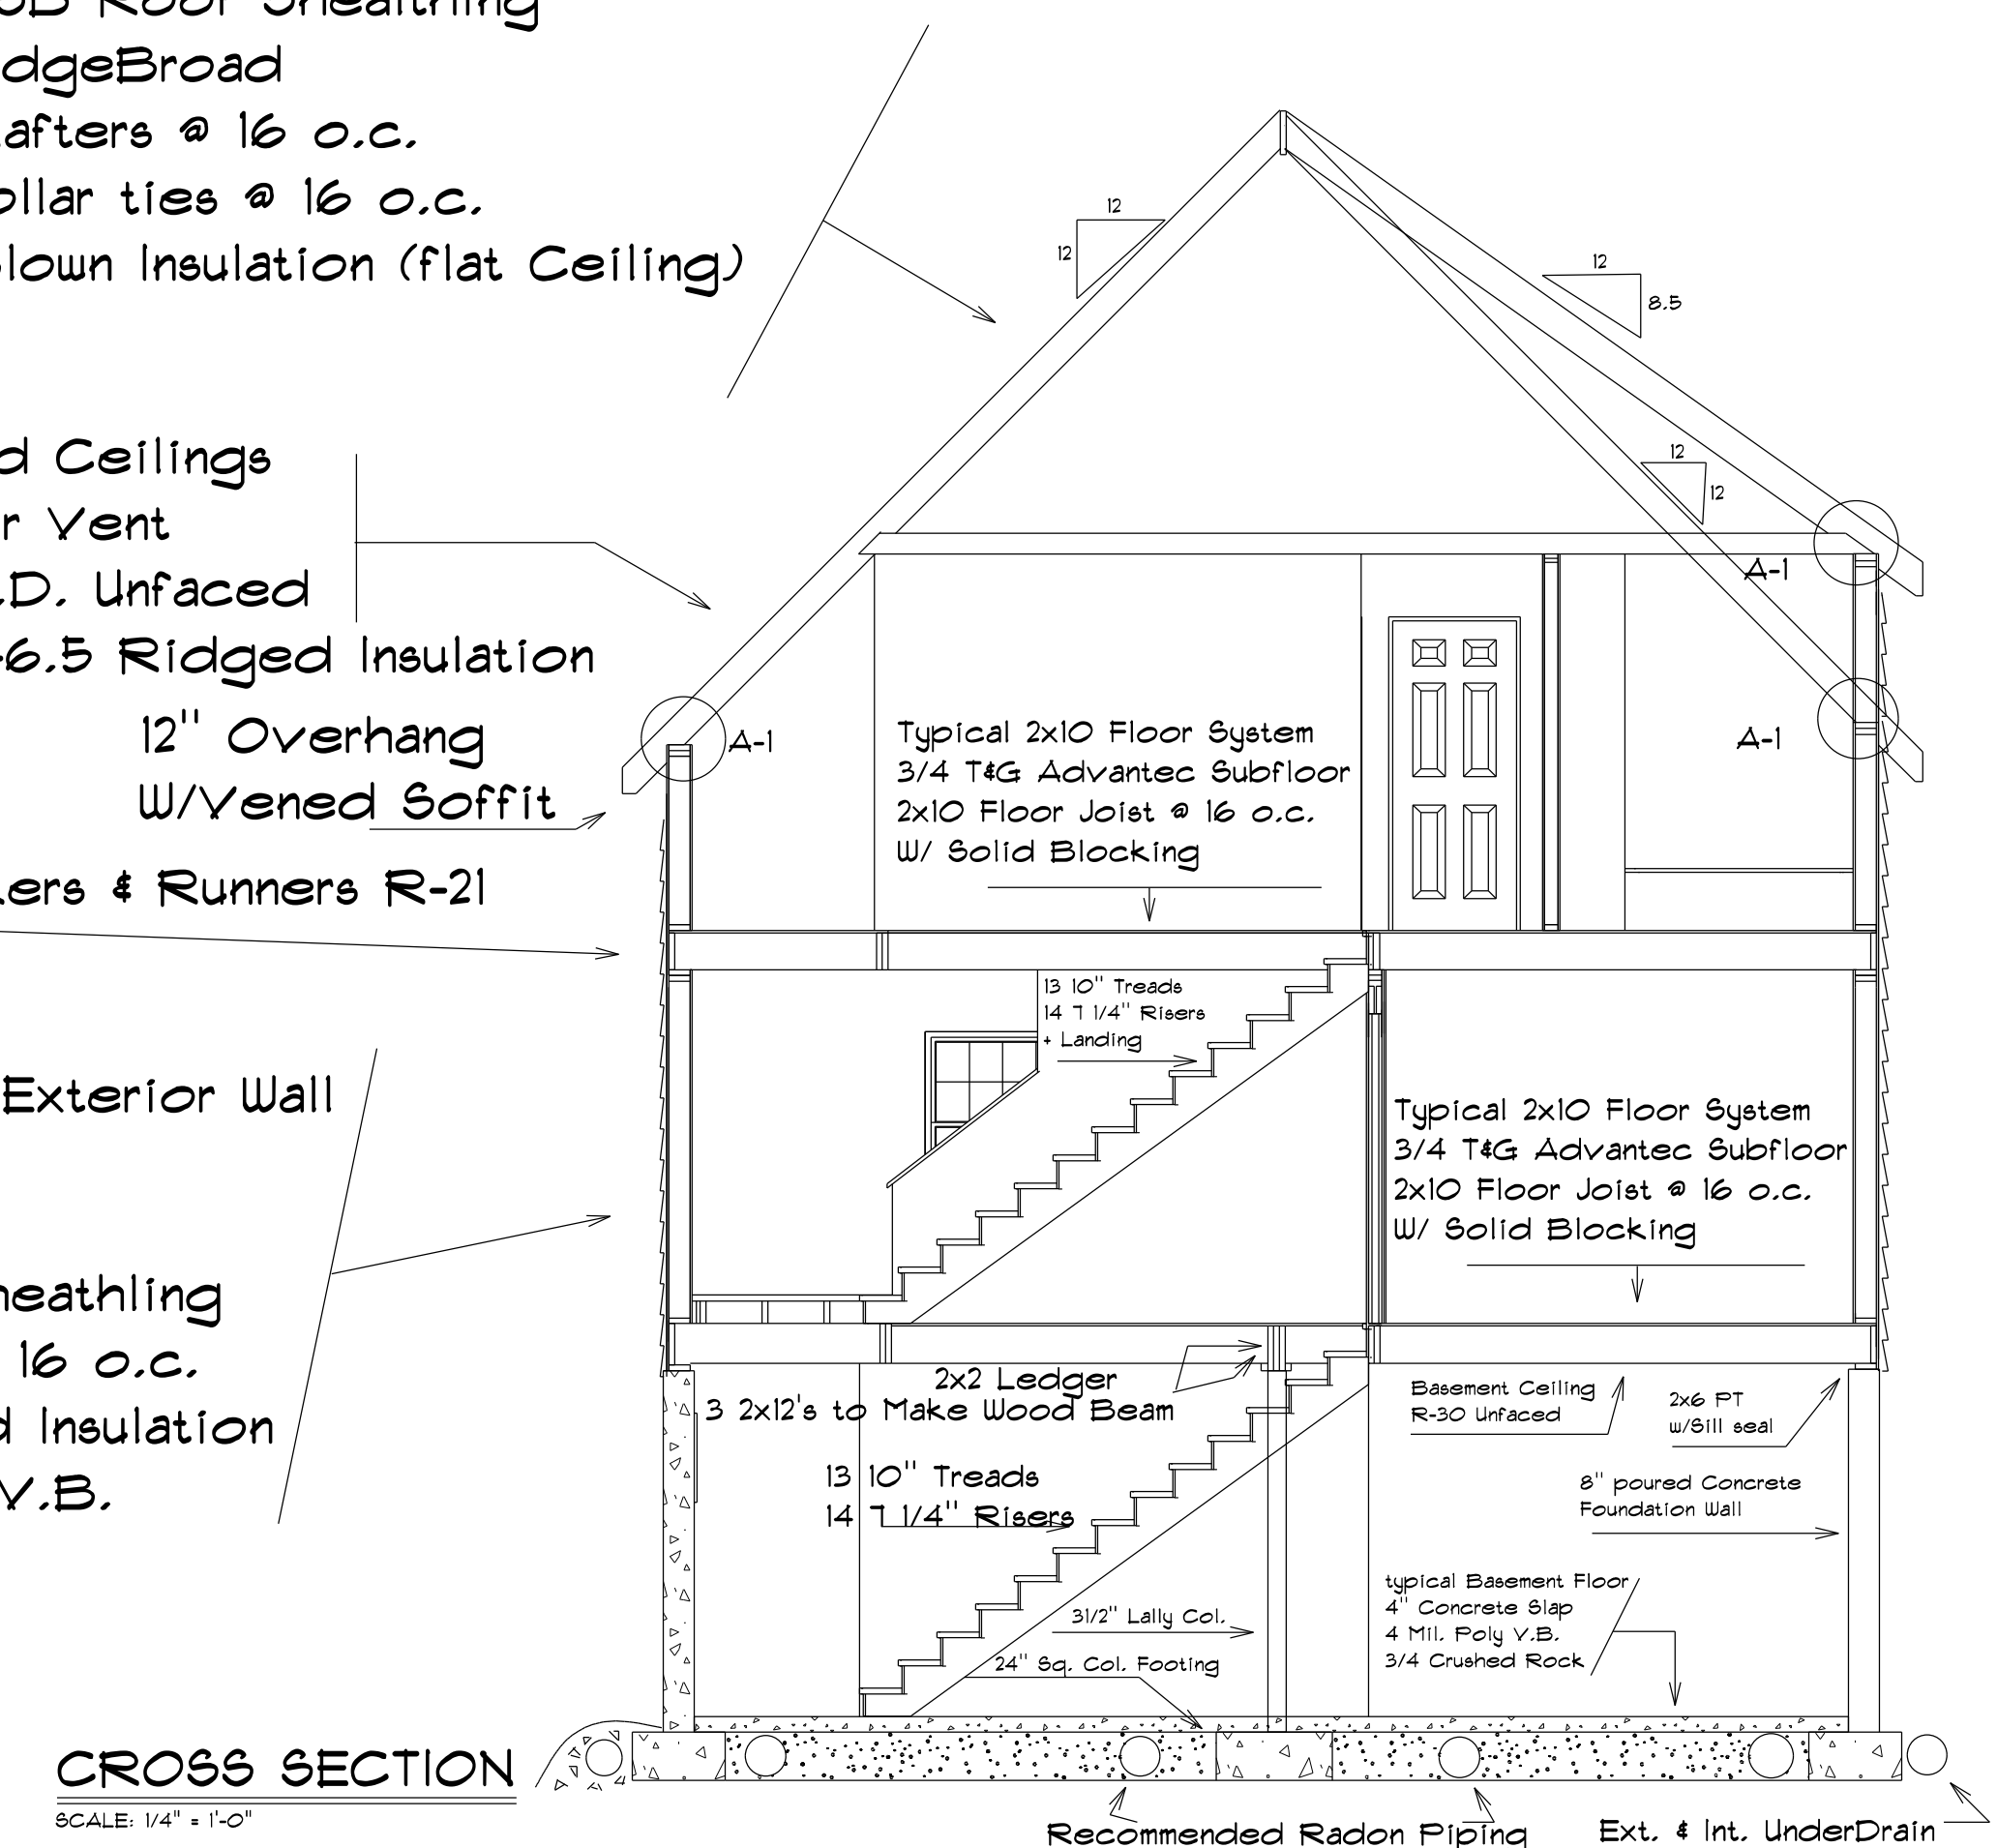

Construction Systems
Dwane Christian
Drawn By Crystal Bourassa
Feb. 15, 2012

Dwane Christian

Drawn By Crystal Bourassa

Feb. 15, 2012