

E500


Endless Pools®
Fitness Systems




Model Type	* 58" Swim & Treadmill	58" Swim	52" Swim
Dimensions	15' L X 58" H X 89" W	15' L X 58" H X 89" W	15' L X 52" H X 89" W
Water Capacity	1,735 Gallons	1,770 Gallons	1,635 Gallons
Weight	3,330 Lbs (Dry) / 19,550 Lbs (Filled*)	2,875 Lbs (Dry) / 19,390 Lbs (Filled*)	2,760 Lbs (Dry) / 18,150 Lbs (Filled*)
Shell Color Options	Alpine White or Ice Gray		
Cabinet Color Options	Dark Mocha or Gray Oak		
Swim Technology	Endless Pools® Swim Machine		
Swim Power Unit	5 HP Hydraulic Power Unit		
Hydromassage Seats	3		
Hydromassage Jets - 27	1 Large Jet, 2 Rotary Jets, 2 Directional Jets, 22 Mini Jets		
Hydromassage Jet Pump	2.5 HP Continuous Duty; 5.2 HP Breakdown Torque - 1 Speed Pump		
Control System	LCD Control Panel; 230v/60amp, 60 Hz, includes G.F.C.I. protected sub-panel		
Water Feature	2 Illuminated Waterfalls		
Water Management System	UVC Ozone		
Circulation Pump	1/15 HP - 1 Speed Pump		
Effective Filtration Area	200 Square Feet (4 x 50 Square Feet)		
Lighting System	Multi-Color 18 LED Points of Light, 5" Main Light & Exterior LED Illumination Bar		
Substructure	14-Gauge Galvanized Steel Frame		
Base Pan	Thermoformed ABS Base Pan		
Heater	4000w/230v		
Energy Efficiency	Certified to the APSP 14 National Standard and the California Energy Commission (CEC) in accordance with California Law		
Stainless Steel Grab Rails	3 Stainless Steel Rails		
Music Option	8 Speakers + Subwoofer, Bluetooth® Enabled		
Exercise Equipment Options	Swim Tether and Rowing Kit		
Vinyl Cover & Lifter Options	Endless Pools® Bi-Fold Covers & Lifters or VacuSeal® Cover System		
Additional Options	Endless Pools® Pace Display, Floor Mirror, Gecko® In-Touch Wi-Fi & Mobile App		

*Includes water and 10 adults weighing 175 lbs. each

Shell Colors




Ice Gray




Alpine White


Cabinet Colors



Gray Oak



Dark Mocha

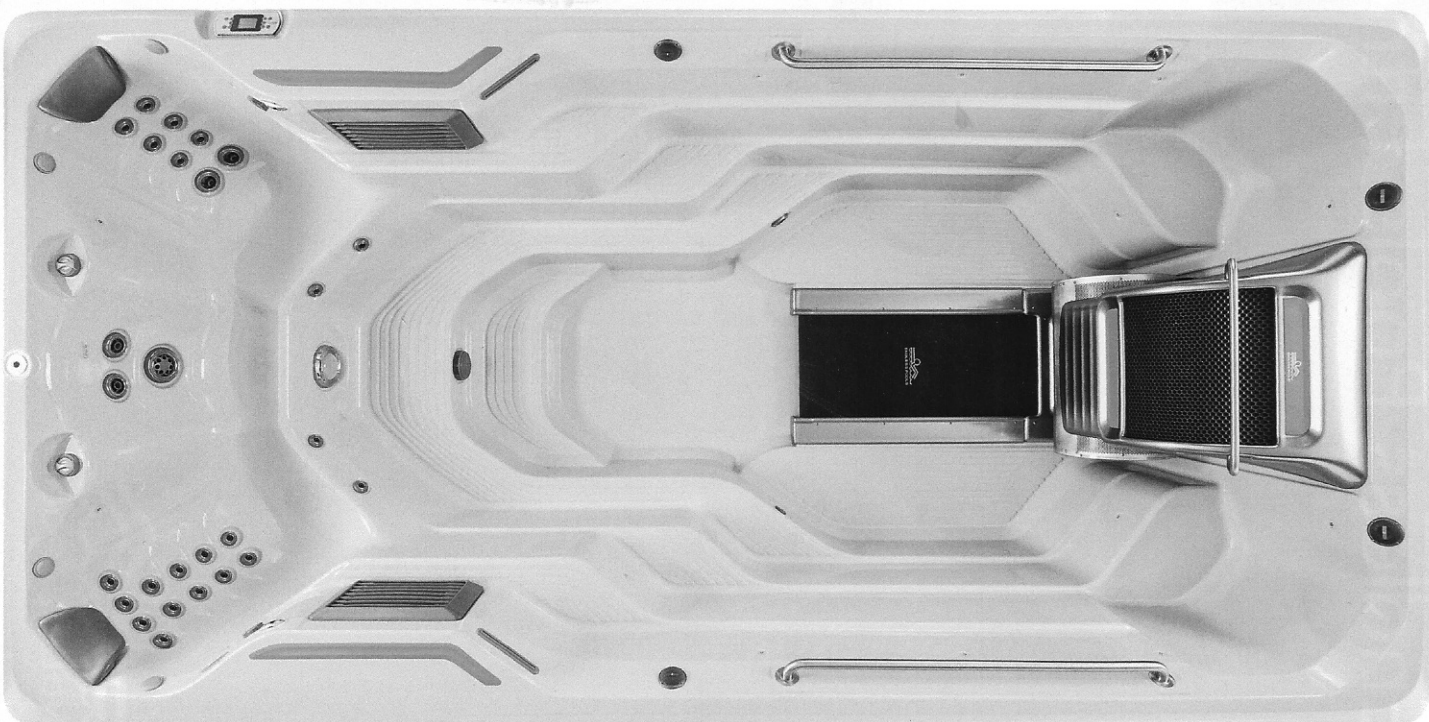

SVC
2PR.
Access
needed