Structural Insulated Panel (SIP)

Cedar Shingle Siding

Bituthane Ice & Water Shield

Aluminum Flashing

Stainless Steel Ring Connector, (See: Porch Framing Details, (2 of 2)

Simpson Joist Hangers, All; As Required

2x8 PT Construction, Typ.

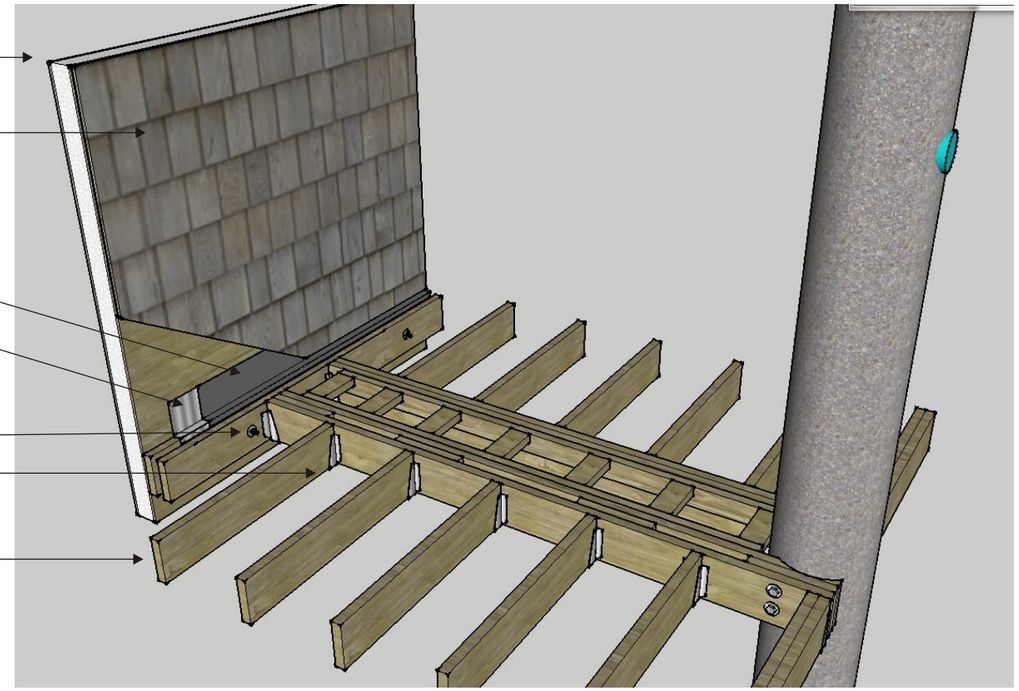

Poured Concrete Column, 14" (See:Column Details)

½"Hex Head Bolts, Washers, Secured in Red Head Drop-In Anchors Embedded In Concrete, 2 Per Side

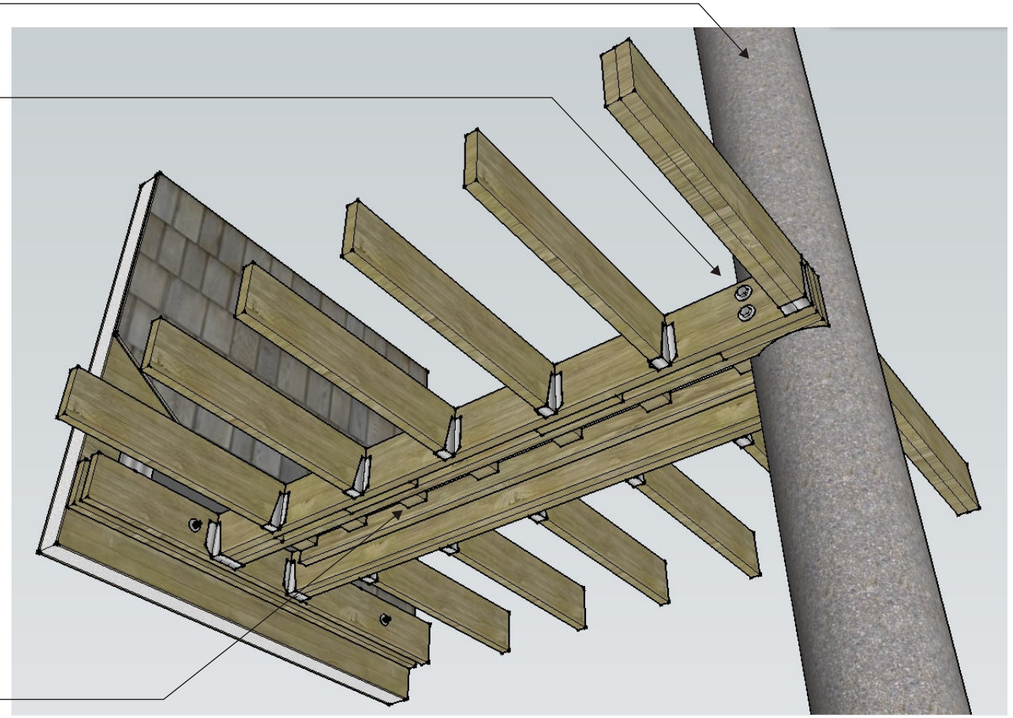

2x4 PT Bridge Framing at Column Spaces

Porch Framing Details (1 of 3)

9

Scale: None (as shown)

Materials:

2x8 PT Dimensional Lumber, 16" O.C. Typical

Simpson Strong Tie Connectors at all structural points

Composite 5/4 Decking

Railings & Balustrade:

Wooden construction

4" Minimum Gap

42" Height

Revisions

Date	Description

Owners: Frederick A. & Colleen R. Writt
Contact Telephone #: 207-653-5347

Residence & A.D.U. at 15 Morningstar Lane, Portland, ME 04103