

VITODENS 100-W

The perfect mix of performance, quality and value, the Vitodens 100-W gas-fired wall-mount condensing boiler is ideal for any home and any budget. With added product features, the new generation of this popular boiler now offers even greater versatility and choice.

The benefits at a glance:

■ Fits Any Home and Budget with high performance at an attractive price.

new Outstanding Efficiency of 95.2% A.F.U.E. on all models.

■ Lasting Performance with industry-leading Viessmann made SA240 316 Ti stainless steel Inox-Radial heat exchanger constructed to CSA B51 and ASME Section IV.

new Low-Emission Combustion with Viessmann made stainless steel MatriX cylinder burner for natural gas or propane. Factory calibrated.

new Versatile On-Board Boiler Control interfaces with most external controls. Now with integrated 0-10V and OpenTherm® communication ability. Outdoor temperature sensor standard.


new Greater Venting Flexibility with increased vent length (up to 200') and multiple venting options

- Horizontal or vertical sealed combustion coaxial venting†
- Horizontal, vertical or hybrid sealed combustion double-pipe venting.*
- Horizontal or vertical single-wall venting.*
- Flexible pipe venting system†


new Suitable for Altitude Levels of up to 10,000 ft. / 3,000 m.

■ Easy Installation, Service and Maintenance with all pipe connections located at the bottom and serviceable components easily accessible from the front.


■ Extremely Quiet Operation; quieter than most refrigerators.



Viessmann made stainless steel Inox-Radial heat exchanger



Viessmann made stainless steel MatriX cylinder burner

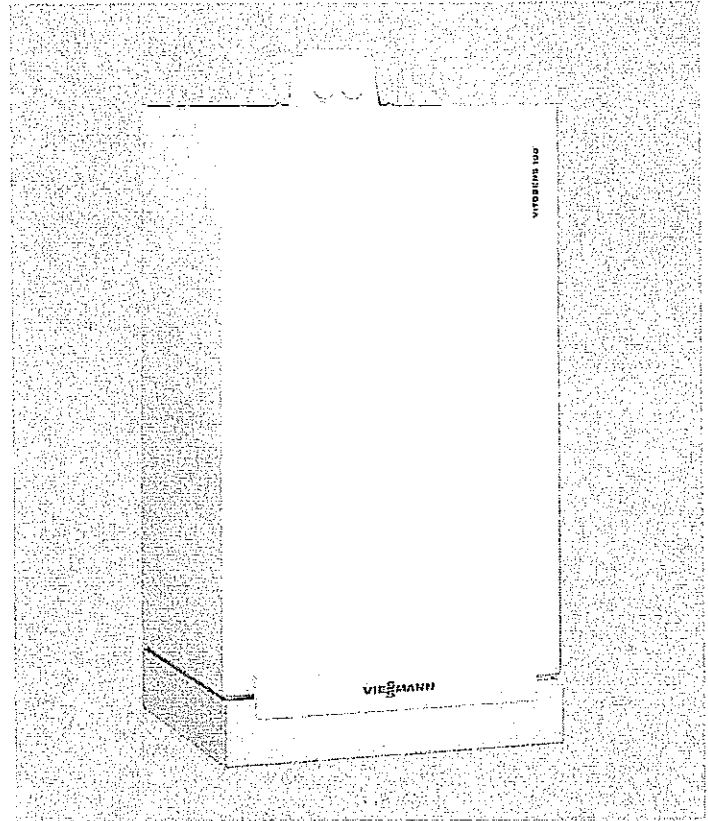

■ Compact, Lightweight Design and zero clearance to combustibles.



■ Built-in Automatic Frost Protection prevents freeze-up during long shut-off periods.

■ Limited Lifetime Warranty in residential applications.

VISSMANN

Viessmann Manufacturing Company Inc.
750 McMurray Road
Waterloo, ON • N2V 2G5 • Canada
Tel.: 1-800-387-7373 Fax: (519) 885-0887
www.viessmann.ca

Viessmann Manufacturing Company (U.S.) Inc.
45 Access Road
Warwick, RI • 02886 • U.S.A.
Tel.: 1-800-298-0867 Fax: (401) 792-0590
www.viessmann-us.com

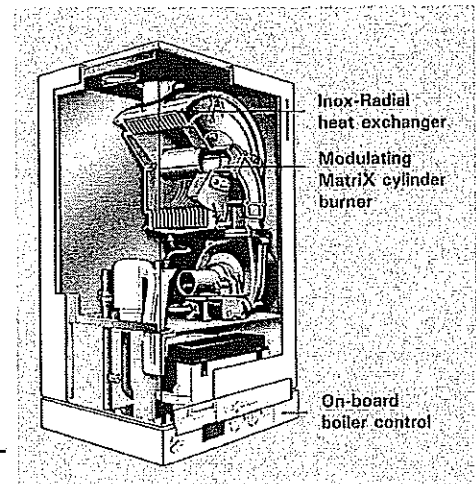

VITODENS 100-W		WB1B	26	35
Rated input range		MBH	37-91	37-118
Total dimensions	Width	inches	15 3/4	15 3/4
	Height	inches	28 1/2	28 1/2
	Depth	inches	14 1/8	14 1/8
Weight	lbs		95	95

† Factory supplied. * Field supplied.



Information subject to change without notice.