

Ratings, Specifications, and Dimensions



Model	Burner Capacity		DOE Heating Capacity (MBH)	AHRI Net Ratings (MBH)	Minimum Chimney Requirements			AFUE	Dim. "A" (in.)	Water Cap. (gal.)	Approx Ship Wt. (lbs.)
	GPH	MBH			Round In. Dia.	Rectangle In. x In.	Height Ft.				
AP-490U	0.75	105	88	77	6	8 x 8	15	84%	34-9/16	10.7	290
AP-590U	1.00	140	116	103	6	8 x 8	15	84%	34-9/16	10.1	300
AP-690U	1.10	140	129	114	6	8 x 8	15	84%	41	16.3	340
AP-790U	1.35	189	159	139	6	8 x 8	15	84%	41	15.4	355


Standard Features

- Fully packaged
- Integrated boiler control system
- 3450 RPM flame retention Beckett oil burner
- Beckett GeniSYS primary control
- Electronic ignitor 14KV
- Taco 007 circulator
- Clean cut fuel pump
- Tridicator
- Relief valve
- Drain valve

MADE IN



U . S . A .

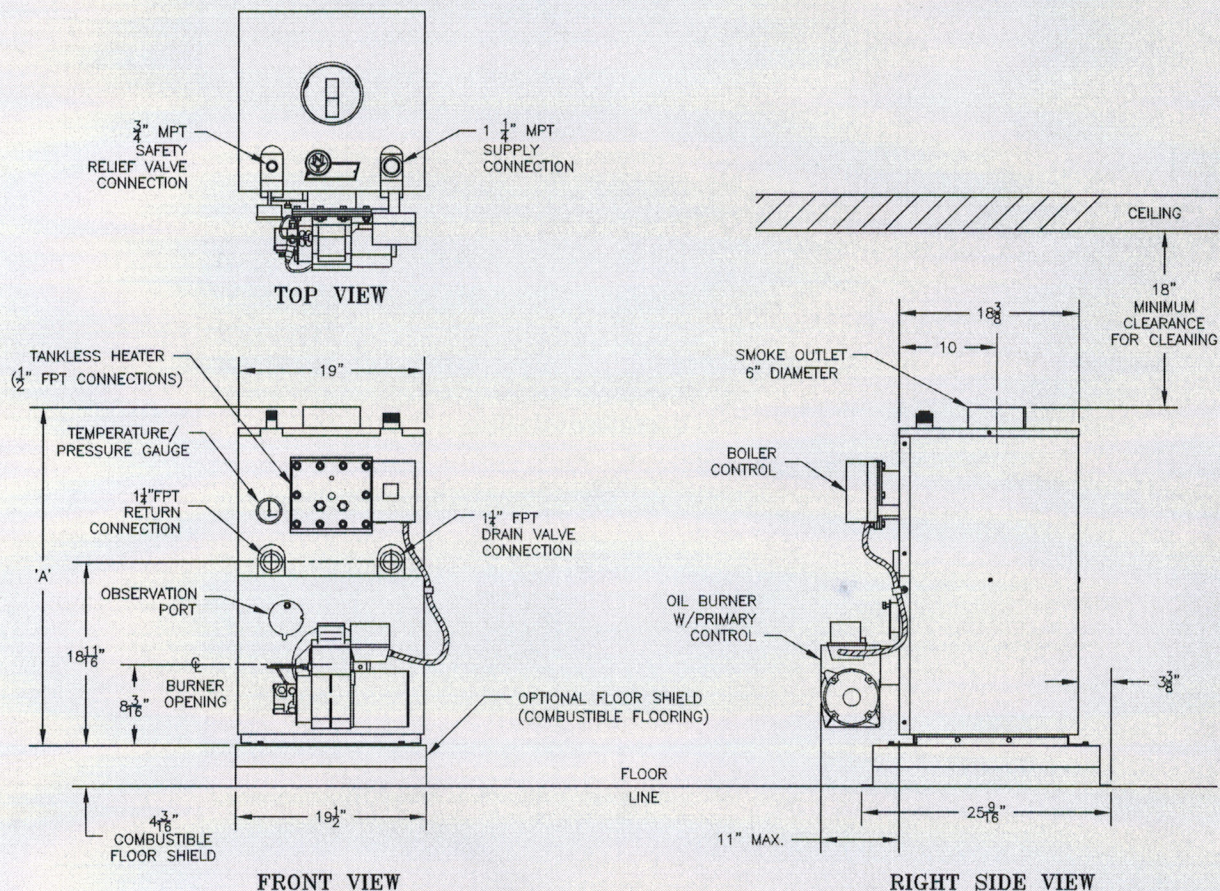

NOTES:

1. CIRCULATOR SUPPLIED LOOSE - MAY BE INSTALLED ON SUPPLY (RECOMMENDED) OR RETURN (ACCEPTABLE ALTERNATIVE) PIPING.
2. RETURN FITTINGS AND DRAIN VALVE SHIPPED LOOSE.



©2012 New Yorker Boiler Company, Inc., Hatfield, PA
 (215) 855-8055
 www.newyorkerboiler.com
 PL81420051000 12/12-5Ms



New Yorker
 RESIDENTIAL HEATING BOILERS