

100-1 61.875x81.75 Steel Double Door Unit Active/Fixed Right

deck

~~\$920.17~~

1

~~\$920.17~~





Inswing  
 Call Width = 60  
 Call Height = 80  
 Frame Width = 61.875  
 Frame Height = 81.75  
 SKU = 558463  
 Vendor Name = S/O JELD-WEN DOOR SYSTEMS  
 Vendor Number = 60075920  
 Manufacturer = JELD-WEN, North Springfield (UP)  
 Customer Service = 1.800.246.9131  
 Catalog Version Date = 05/07/2016  
 Room Location = deck  
 Is This a Remake = No  
 Specific Information =  
 Jamb Cladding = No  
 Jamb Width = 4 9/16"  
 Jamb Finish Type = None  
 Jamb Specie = Primed Auralast  
 Weather-Strip Type = Compression Bronze  
 Sill / Threshold Type = High Dam Adjustable w / Screen Track  
 Sill Width = 5 5/8"  
 Sill Finish = Aluminum with Vinyl Cap  
 Sill Pan = No  
 Include Lockset = No  
 Door Bore = Double Bore  
 Bore Backset = 2 3/8"  
 Bore Diameter = 2 1/8"  
 Lockset Bore Position = 44  
 Dead Bolt Bore Position = 5 1/2"  
 Hinge Prep = 3-Hinge Prep  
 Hinge Size = 4" x 4"  
 Hinge Type = Ball Bearing w/Safety Stud  
 Hinge Radius = 5/8" Radius / Square  
 Hinge Finish = Satin Stainless Steel  
 First Hinge Position = 6 3/4"  
 Second Hinge Position = 36"  
 Third Hinge Position = 65 1/4"  
 Door Glass Grille Type / Color & Profile = None  
 Door Screen Type = Heavy Duty Extruded  
 Door Screen Color = Brilliant White  
 Building Code = Non-Certified  
 Energy Star Needed = No  
 Protection for Exterior Door Flyer = No  
 Unit Type = Pre-Hung  
 Handing & Swing = Active/Fixed Right Inswing  
 Application = Full  
 Door Style = Flush Full Lite  
 Door Finish Type = None  
 Door Glass Insert Size & Shape = 20 x 64 Rectangle  
 Door Glass Insert Option = Clear / Privacy Grille Designs  
 Door Glass Type = Standard Glass  
 Door Glass Design Options = 1-Lite  
 Door Glass Caming = None  
 Door Glazing / Clear or Privacy Type = Insulated Low-E Clear  
 Door Glass Privacy Rating = 1  
 Door Type = Doors with Inserts

\$782.15

\$782.15

Save \$138.02 (15%) until 7/6/2016  
 \* S/O JELD-WEN DOOR SYSTEMS-558463 Promotion until 7/6/2016

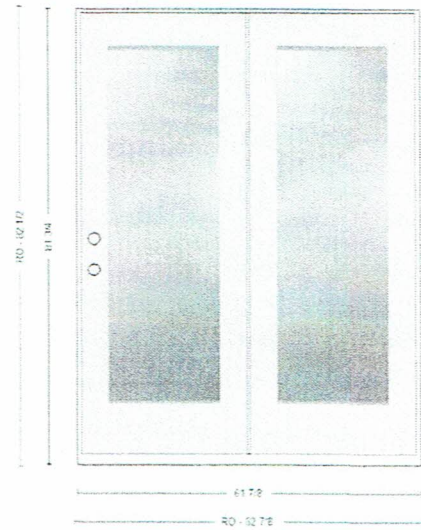

5