



Wall Mounted High-SEER 9, 12 and 15,000 BTU Systems


SYSTEMS 9RLS2, 12RLS2, 15RLS2

Up to 27.2 SEER
North America's Most
Efficient Mini-Splits




ESP Energy Saving Program

These Halcyon systems know how to save you money even when you forget. If you leave the room without turning the unit off, ESP knows that you left and 20 minutes later, set temperature is increased by 4°F when cooling and reduced by 8°F when heating. When you come back to the room, it returns to previous operating mode. This prevents wasteful operation to save energy without you having to think about it.

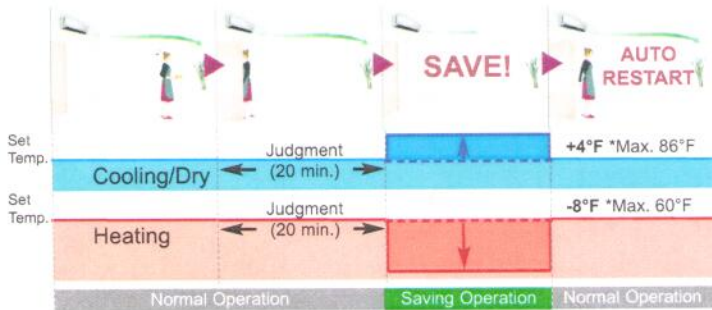

High Performance Heating

Heating capacity at low outdoor temperatures was improved by adopting a large heat exchanger and a high capacity compressor. Rated heating capacity is maintained up to 20°F. This new model can operate down to -5°F.

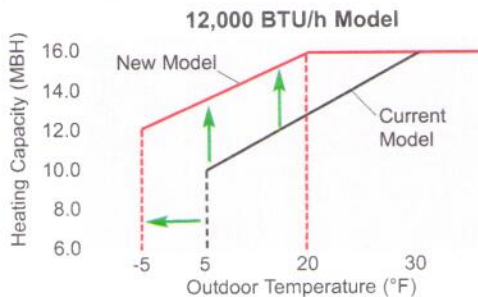

Standard Features

- Wireless Remote Control
- Sleep Timer
- Weekly Timer
- Dry Mode
- Auto Louver: Up/Down
- Auto Mode
- Quiet Mode (Indoor)
- Economy Mode
- Low Noise Mode (Outdoor)
- Energy Saving Program
- Program Timer
- Auto Restart/Reset
- Auto Changeover*
- Low Ambient Heating
- Apple Catechin Filter
- Ion Deodorizing Filter
- Minimum Heat (50°F/10°C)
- Powerful Operation Mode

Optional Accessories

- Wired Remote Controller: UTY-RNNYM
- Simple Remote Controller: UTY-RSNYM
- Communication Kit: UTY-TWBXF


*Auto Changeover (Heating to Cooling or Vice Versa) automatically alternates between heating or cooling if the room temperature falls 4°F below the set temperature when cooling or rises 4°F above set temperature when heating. Auto changeover is not designed to provide rapid changes between heating and cooling operation or simultaneous heating and cooling.




Slim & Compact

Up to 25% slimmer than the competing units.

INDOOR UNIT DIMENSIONS

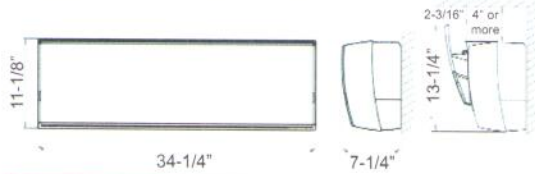

OUTDOOR UNIT DIMENSIONS

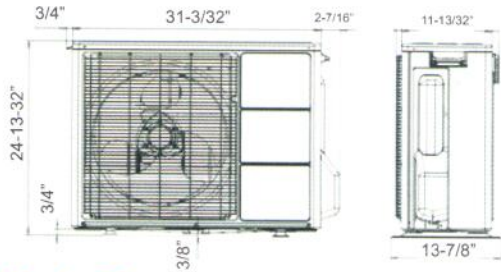


3 Mode Timer (Weekly/Program/Sleep)

Weekly timer can be easily set by wireless remote controller. ON, OFF can be set up to 4 times in one day and up to 28 times in one week. For other modes, program timer and sleep timer can also be selected by pushing a single button.





Minimum Heat Operation

The room temperature can be set to go no lower than 50°F, thus ensuring that the room temperature does not get too cold when not occupied.



Caution: When the room temperature is higher than 50°F, minimum heat operation does not start. Operation starts and maintains the room temperature at 50°F for 48 hours when the temperature drops below 50°F. When minimum heat operation stops, the room set temperature quickly returns to the pre-set temperature.

High Performance Heating

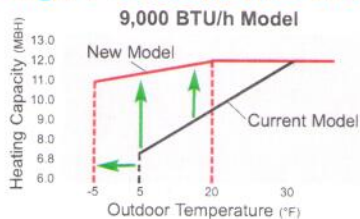

*See front page for 12RLS2 chart

	9RLS2 Heat Pump	12RLS2 Heat Pump	15RLS2 Heat Pump
Nominal Cooling BTU/h	9,000	12,000	14,500
Min.-Max. Cooling BTU/h	3,100~12,000	3,100~13,600	3,100~18,400
Nominal Heating BTU/h	12,000	16,000	18,000
Min.-Max. Heating BTU/h	3,100~22,000	3,100~22,100	3,100~23,900
HSPF BTU/hW	12.5	12.0	12.0
SEER BTU/hW	27.2	25.0	21.5
EER Clg/Htg	16.1/15.0	13.8/13.3	12.0/13.3
Clg. Operating Range °F(°C)	14~115 (-10~46)	14~115 (-10~46)	14~115 (-10~46)
Htg. Operating Range °F(°C)	-5~75 (-21~24)	-5~75 (-21~24)	-5~75 (-21~24)
Moisture Removal PL/h(l/h)	2.75 (1.3)	3.8 (1.8)	4.44 (2.1)
Voltage/Frequency/Phase	208-230/60/1	208-230/60/1	208-230/60/1
Recommended Fuse Size (A)	20	20	20
Air Circ. C.F.M. (m ³ /h): Hi	500 (850)	500 (850)	530 (900)
Medium	394 (670)	394 (670)	436 (740)
Low	324 (550)	324 (550)	336 (570)
Quiet	194 (330)	194 (330)	229 (390)
Noise Level dB(A): Hi	43/43	43/43	45/45
Medium	37/38	37/38	40/40
Low	32/32	32/32	33/34
Quiet	21/21	21/21	25/27
Outdoor Fan Speed RPM Clg/Htg	780/780	870/780	870/780
Outdoor Noise Level dB(A)	48/49	49/50	51/51
Current Rated (A): Cooling	2.7	4.0	5.5
Heating	3.7	5.5	6.1
Power Use Rated (kW): Cooling	.56	.87	1.21
Heating	.80	1.20	1.35
Fan Speeds Stage	4+Auto	4+Auto	4+Auto
Air Direction: Horizontal	Manual	Manual	Manual
Vertical	Auto	Auto	Auto
Air Filter	Washable	Washable	Washable
Apple Catechin Filter	Yes	Yes	Yes
Connection Method	Flare	Flare	Flare
Combined Max. Lgth Ft (m)	66 (20)	66 (20)	66 (20)
Max. Vertical Diff. Ft (m)	49 (15)	49 (15)	49 (15)
Conn. Pipe Diameter Inch	Suc. 3/8 Dis. 1/4	Suc. 3/8 Dis. 1/4	Suc. 1/2 Dis. 1/4
Net Weight lbs. (kg)	21 (9.5) 88 (40)	21 (9.5) 88 (40)	21 (9.5) 88 (40)
Dimensions: Height Inch	11-1/8 13-1/4	24-13/32 24-13/32	11-1/8 13-1/4
mm	282/337*	620	282/337*
Width Inch	34-1/4	31-3/32	34-1/4
mm	870	790	870
Depth Inch	7-1/4	11-13/32	7-1/4
mm	185	290	185
Refrigerant	R410A	R410A	R410A

Indoor	Outdoor	Indoor	Outdoor	Indoor	Outdoor
ASU9RLS2	AOU9RLS2	ASU12RLS2	AOU12RLS2	ASU15RLS2	AOU15RLS2

Note: Figures are based on 230 Volts.
*Height when front panel is open.

The Fujitsu logo is a registered trademark of Fujitsu Limited. The Halcyon logo and name is a trademark of Fujitsu General America, Inc. ENERGY STAR is a registered trademark of the EPA and DOE. Copyright 2012 Fujitsu General America, Inc.

Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR criteria. Ask your contractor for details or visit www.energystar.gov.

Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information without notice and without incurring any obligations.

FUJITSU

FUJITSU GENERAL AMERICA, INC.
353 Route 46 West • Fairfield, NJ 07004
Tel: (973) 575-0380 • Fax: (973) 836-0448
www.fujitsugeneral.com

Part #6-26-FG2039 Rev. 1/12

FUJITSU GENERAL AMERICA, INC.
MINI-SPLIT LIMITED WARRANTY STATEMENT
Models : ASU9RLS2/AOU9RLS2, ASU12RLS2/AOU12RLS2,
ASU15RLS2/AOU15RLS2



Fujitsu General America, Inc. (FGAI) warrants this product conforms to the manufacturer's specifications and will be free of defects in material and workmanship and should any defect occur, Fujitsu General America, Inc. will correct the defects subject to the following conditions:

PARTS: For a period of **five (5) years** from said date of sale or installation FGAJ will supply new, or at its option rebuilt replacement parts.

COMPRESSOR: For a period of **seven (7) years** from said date of sale or installation FGAJ will supply new Compressor.

REMOTE CONTROL: For a period of **ninety (90) days** from said date of sale or installation. Whichever is later, FGAJ will exchange with a new or rebuilt hand unit.

PROOF OF PURCHASE: Copy of the proof of purchase is required to make this warranty valid.

THIS WARRANTY DOES NOT COVER LABOR or:

- Shipping damage.
- System installation.
- Unpacking and/or removal of protective shipping material.
- Usage outside manufacturer's limitations as specified in the owner's manual.
- Service required as a result of improper installation, incorrect or insufficient AC supply voltage.
- Installation, set up, or adjustments of consumer controls.
- Incorrectly matching of systems.
- Any owner than the original consumer.
- Warranty only remains in effect if the system remains at the original site of installation.
- Damage from modification or incorporation into other products.
- Any failure, loss, damage or personal injury due to accident, neglect, or abuse by the consumer or to improper operation, maintenance or storage or to alteration or to failure to follow normal procedures as outlined in the instruction manual.
- Any unit purchased from an unauthorized dealer or any online retailer.
- Damage caused by force majeure or other factors such as power surge damage caused by lightning, power fluctuation or interruption of electrical power.
- Operation of the system in a corrosive or wet environment.
- Transportation charges incurred in connection with warranty service.
- Indirect, consequential, or special damages, except as required by Federal or State laws.
- Repair or replacement of warranted parts by other than qualified installer.
- Product registration is not a condition of coverage under this limited warranty however; please register online or return the registration card so that the FGAJ can contact you if a question of safety arises.

THE WARRANTY AND REMEDY STATED ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS OR IMPLIED WARRANTIES INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SOME LAWS DO NOT ALLOW EXCLUSION OF IMPLIED WARRANTY, THEREFORE THIS WARRANTY SHALL BE DEEMED MODIFIED TO BE CONSISTENT WITH SUCH LAWS.

Some states do not allow limitation on how long an implied warranty lasts; therefore these limitations or exclusions may not apply to you. This limited warranty gives you specific legal rights. You may also have other rights that may vary from state to state.

This Warranty applies to the Continental United States, Alaska, Hawaii, Canada and Puerto Rico.
PLEASE REGISTER THIS PRODUCT at <http://www.fujitsugeneral.com> or mail card to:

Fujitsu General America
353 Route 46 West
Fairfield, NJ 07004
Attn. Warranty Department